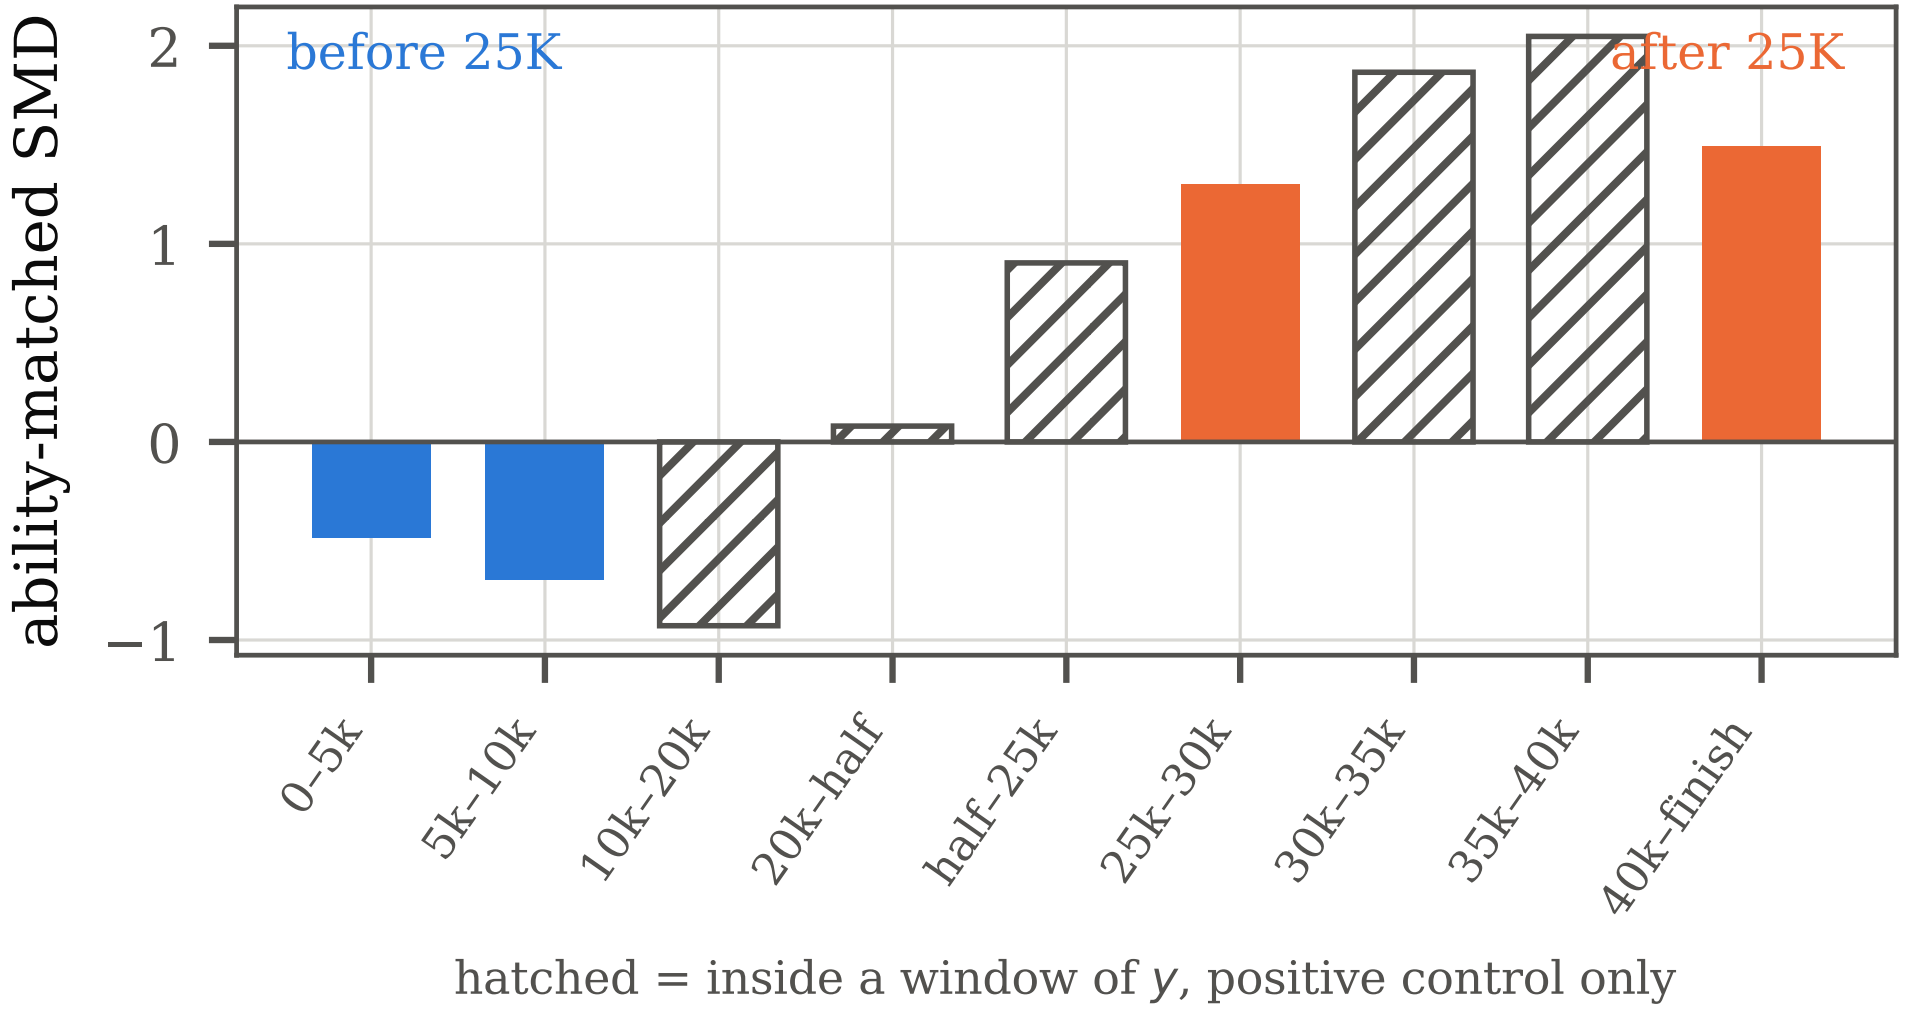
ability-matched SMD
2
1
0
−1
before 25K
after 25K
0–5k
5k–10k
10k–20k
20k–half
half–25k
25k–30k
30k–35k
35k–40k
40k–finish
hatched = inside a window of y, positive control only