

Preview of  
**The SpaceX Starship**

*General Consensus on Weights & Fuel, and Calculated  $\Delta V$*

Jess Johnson

Senior Instrumentation Scientist  
Steward Observatory, University of Arizona  
July 2023

**Abstract**

The following memo describes characteristics of the SpaceX Starship that may be important to the development of orbital trajectories. SpaceX has not released any finalized details on the vehicle's configuration as of this time, and a lot of the unofficial chatter on those details varies from week to week. What I have accumulated here is the general consensus on certain fundamental values that I have found in various reliable references, with those that have been repeated by more than one source given primacy. I have also provided basic  $\Delta V$  calculations based on those values, which can act as a rough comparison when considering orbits and other options.

# Contents

<b>1</b>	<b>Description of the SpaceX Starship</b>	<b>3</b>
1.1	Vehicle . . . . .	3
1.2	Engines & Fuel . . . . .	3
<b>2</b>	<b>Payload</b>	<b>4</b>
2.1	Fairing . . . . .	4
2.2	Payload Adaptor . . . . .	5
2.3	Payload Environment . . . . .	5
2.3.1	Load & Acceleration . . . . .	5
2.3.2	Sine Vibration . . . . .	5
2.3.3	Acoustic Environment . . . . .	6
<b>3</b>	<b>Mass &amp; Capacities</b>	<b>7</b>
3.1	Starship Specifications . . . . .	7
3.2	Super Heavy Booster Specifications . . . . .	7
3.3	Starship Fuel . . . . .	7
<b>4</b>	<b>Delta V</b>	<b>8</b>
4.1	The Rocket Formula . . . . .	8
4.2	Calculating $\Delta V$ . . . . .	9
4.2.1	Value for Methalox $v_e$ . . . . .	9
4.2.2	Starship Delta V Values . . . . .	10

# 1 Description of the SpaceX Starship

## 1.1 Vehicle

The Starship is the next heavy lifting space vehicle to be developed by Space X after the Falcon series. Like NASA's Space Launch System (SLS), the Starship system is meant to be a family of vehicle configurations that can be used to transport both human crews and space hardware, carry extra fuel to refuel other missions, and reach both earth orbit and interplanetary space. Unlike the SLS, however, the Starship is composed of mostly reusable parts, which reduces the cost of space access considerably.

The primary components are the Starship itself, consisting of a nose cone (configurable crew, cargo, and fuel transport), second stage booster engines, and fuel tanks; and the Super Heavy Booster, a gargantuan first stage booster that stands roughly 72m tall. When used together (as in Figure 1 below), the entire assembly is 122m from launch pad to tip of nose cone. It is the largest and most powerful rocket ever assembled, standing 10m taller than the Saturn 5 with more than twice the thrust.[3]

## 1.2 Engines & Fuel

The Starship is powered by a new SpaceX engine, the 'Raptor'. The Raptor is a full-flow staged combustion cycle engine, meaning that it recycles the exhaust it uses to power its turbine into the combustion chamber where it is used a second time to directly produce thrust.[6] Figure 2 below is a simple schematic diagram of the Raptor engine. It burns the bi-propellant fuel Methalox, which, in the SpaceX formulation, is a combination of Liquid Oxygen and Liquid Methane at a 78:22 ratio.[6] Methalox is rarely used in spaceflight as Methane requires specific engine technologies to effectively ignite and burn, and SpaceX is the first to attempt a commercially usable design.

The upper stage Starship will have six Raptors, three optimized for sea level and three optimized for vacuum (the Vacuum Raptor), providing a total of  $1.47 \times 10^7$  Newtons of thrust at maximum. The Super Heavy Lifter will have a baseline of 33 Raptor engines, which can be increased or decreased as needed. This combination of engines provides a total of  $7.45 \times 10^7$  Newtons (maximum) of additional thrust.[6]

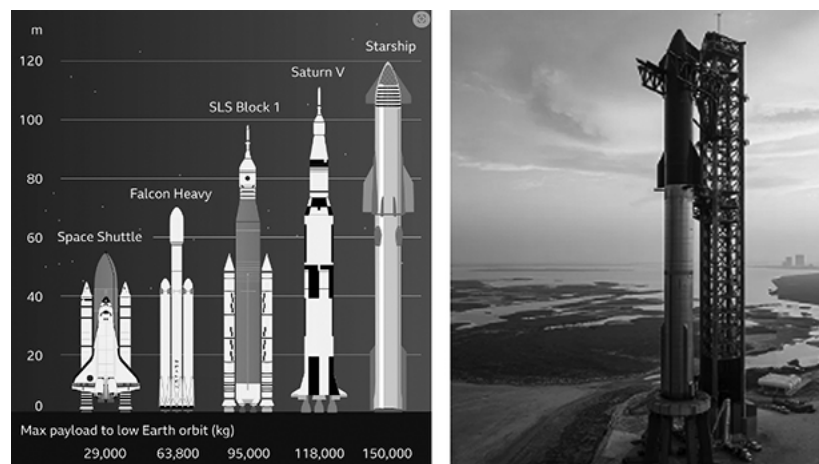


Figure 1: A comparison of spacecraft height and payload capacity, and a rendering of the Starship on its launchpad. (Images from BBC. Available at <https://www.bbc.com/news/science-environment-65334810>)

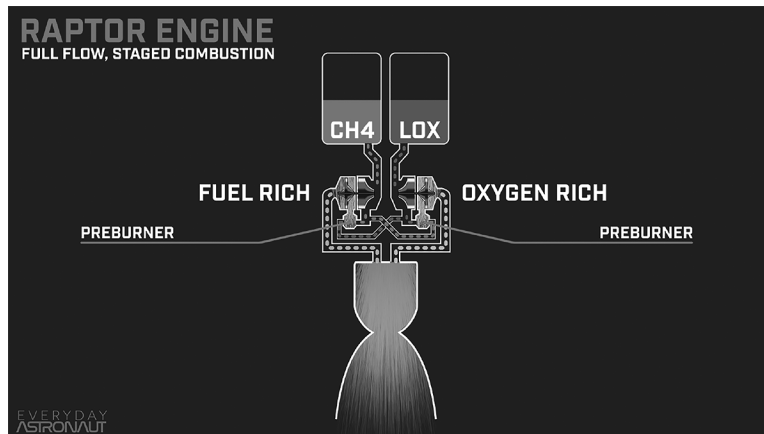


Figure 2: Functional Schematic of the SpaceX Raptor Engine

## 2 Payload

### 2.1 Fairing

The standard Starship payload fairing is a clam shell structure 9m in outer diameter with an 8m dynamic envelope. Payload integration is accomplished by a mission-unique payload adaptor, which is also responsible for payload separation at time of deployment.[5]

The standard payload height is given as 17.24 m, but an extended payload height of 20m is also available. The payload profile is cylindrical, but tapered at the top, as shown in Figure 3 (Diagram based on SpaceX illustration. SpaceX can mount NASA Shuttle style trunnion support system components along the sidewalls or the nose to provide structural support to the payload.[5])

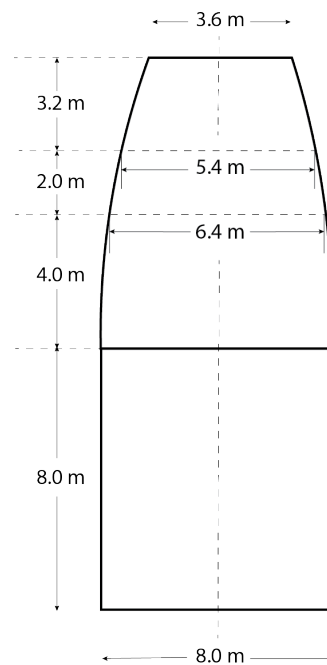


Figure 3: Vertical profile of Starship payload envelope.

## 2.2 Payload Adaptor

The Payload Adaptor is the physical structure used to connect the launch vehicle to the payload. It typically provides the electrical and data interfaces to the payload. SpaceX provides a payload adaptor that connects to 'standard payload interface systems' with a clampband separation system, or will integrate a custom adaptor provided by the client.

Standardized payload and power interfaces are provided, or electrical ground support equipment can be provided by the client. These interfaces are primarily provided for pre-launch monitoring and events, but some SpaceX interface functionality may be available in-flight.[5]

## 2.3 Payload Environment

SpaceX states that Starship's payload environment will "...meet or improve upon those of the Falcon Heavy Launch System", so an understanding of the Falcon's payload environment provides a baseline for specifications not yet provided for the Starship. The configuration used here is a Falcon Heavy with a 'standard' payload of 1,810 kg or more.

### 2.3.1 Load & Acceleration

During launch and flight, a payload will experience a range of accelerations, both axially and laterally. Axial accelerations result from engine thrust and air drag; lateral accelerations result from first stage shutdown, wind gusts, and maneuvering by engine gimbal. Acceleration limits can be achieved by throttling the vehicle's engines, possible both on the Starship itself and the Super Heavy stage.

Payload load factors are dependent on the dynamic coupling between vehicle and payload, but SpaceX has provided maximum expected design load factors for Starship. They are expressed in the plot shown in Figure 4 below.[5] Lateral acceleration values are always positive. Positive axial values indicate compression; negative values indicate tension.[1]

### 2.3.2 Sine Vibration

SpaceX has not released information on maximum predicted sine vibration values for Starship, but they are available for the Falcon Heavy. Maximum levels are given for the top of the payload attachment fitting for an amplification level of  $Q=20$  through  $Q=50$ , and are applicable at all stages of flight. (For

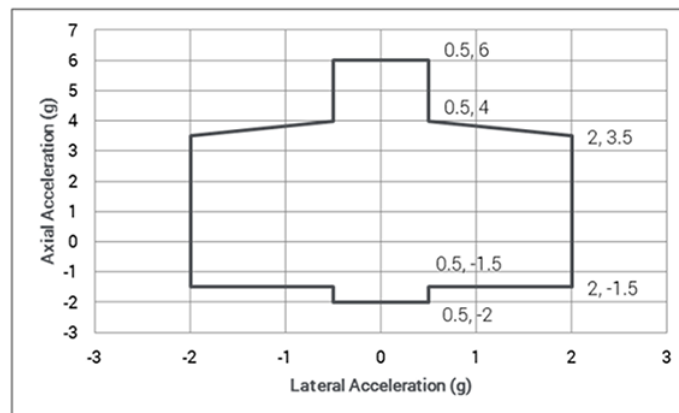


Figure 4: Graph of payload maximum design load factors. Diagram from SpaceX.

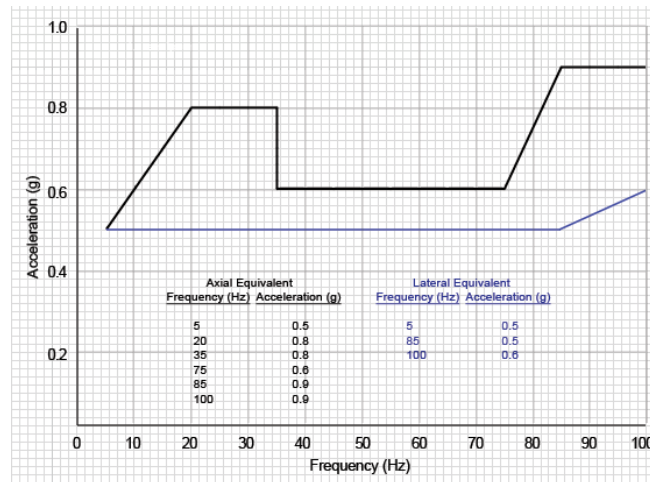


Figure 5: Graph of maximum sine vibration for the Falcon Heavy. Axial equivalent vibration is in black; lateral equivalent vibration is in blue. Diagram from SpaceX.

a discussion of amplification factors and damping, see Irvine, 2005.[2] The limits are shown in Figure 5 above.[5]

### 2.3.3 Acoustic Environment

Payloads are subjugated to a range of acoustic noise, originating from a variety of sources (engine noise resulting from the exhaust stream mixing with the atmosphere, atmospheric noise, aerodynamic excitation, etc.). The total acoustic energy being generated at any particular point is called the 'acoustic load'. Acoustic load levels are highest during liftoff and transonic flight. Lower frequencies contribute the majority of acoustic energy. The primary result of acoustic load is vibration.[4]

SpaceX has released limited information on the predicted acoustic load environment of the Starship. The maximum predicted acoustic environment levels in 1/3 octave bands are shown in the plot in Figure 6 below.

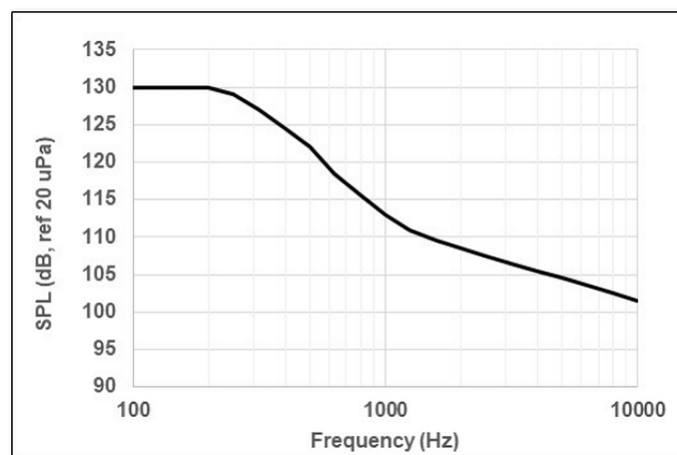


Figure 6: Graph of maximum predicted acoustic environmental levels. Diagram from SpaceX.

### 3 Mass & Capacities

Starship is large, in both size and weight. The following is not official, but culled from several sources.

#### 3.1 Starship Specifications

Mass and cargo capacities for the upper stage Starship:

Table 1: Table of Starship mass and cargo capacities.

Description	Condition	Value	Units
Starship Mass	Unloaded	110	Metric Tons
Starship Cargo Mass	Maximum	120	Metric Tons
Fuel Mass	Maximum	1200	Metric Tons
Total Starship Mass	Maximum	1430	Metric Tons

#### 3.2 Super Heavy Booster Specifications

Mass and fuel capacities for the lower stage Super Heavy Booster:

Table 2: Table of Booster mass and fuel mass.

Description	Condition	Value	Units
Booster Mass	Unloaded	270	Metric Tons
Fuel Mass	Maximum	3300	Metric Tons
Total Booster Mass	Maximum	3570	Metric Tons

Combined, this gives us the following Specifications for the full Starship configuration:

Table 3: Table of combined Starship and Booster mass and cargo capacities.

Description	Condition	Value	Units
Starship and Booster Mass	Unloaded	380	Metric Tons
Starship Cargo Mass	Maximum	120	Metric Tons
Fuel Mass	Maximum	4500	Metric Tons
Total Starship and Booster Mass	Maximum	5000	Metric Tons

#### 3.3 Starship Fuel

The Starship uses the bi-propellant fuel Methalox, composed of Liquid Oxygen and Liquid Methane. SpaceX Methalox is ( $LCH_4$ ) in a 78:22 mass ratio.

The density of Liquid Oxygen at STP is  $\rho_{LO_4} = 1141 kg/m^3$ , and the density of Liquid Methane at STP is  $\rho_{LCH_4} = 424 kg/m^3$ . The density of the combined liquids is then:

$$M_{comb} = 78kg + 22kg = 100kg$$

$$V_{comb} = \frac{M_{LO_4}}{\rho_{LO_4}} + \frac{M_{LCH_4}}{\rho_{LCH_4}} = 1.07 \times 10^{-1} \frac{kg}{m^3}$$

$$\rho_{Methalox} = \frac{100kg}{1.07 \times 10^{-1} \frac{kg}{m^3}} = 933.1 \frac{kg}{m^3}$$

In terms of metric tons, this is  $\rho_{Methalox} = .9331 \frac{t}{m^3}$ . The Starship's fuel capacities and weights are then:

Table 4: Table of fuel capacities and volumes.

Description	Condition	Value	Units	Notes
Starship Fuel Capacity	Loaded	1200	Metric Tons	(2,645,000 lbs)
Starship Fuel Volume	Loaded	1286	Cubic Meters	(45,415 Cubic Feet)
Booster Fuel Capacity	Loaded	3300	Metric Tons	(7,275,255 lbs)
Booster Fuel Volume	Loaded	3537	Cubic Meters	(124,908 Cubic Feet)
Total Combined Capacity	Maximum	4500	Metric Tons	(9,920,255 lbs)
Total Combined Volume	Maximum	4823	Cubic Meters	(170,323 Cubic Feet)

## 4 Delta V

### 4.1 The Rocket Formula

The fundamental equation in rocket science is the Tsiolkovsky Rocket Equation. In a rocket powered by a reactive engine system, the engine system consume propellant, creating the force that moves the rocket while decreasing the rocket's overall mass. The decrease in mass is therefore related to the change in velocity:

$$\Delta V = v_e \cdot \ln \left( \frac{m_0}{m_t} \right)$$

$v_e$  here is the *exhaust gas velocity* as the gas leaves the exhaust cone. It is sometimes referred to as *effective exhaust gas velocity*, indicating that it is the mean velocity over the exhaust cone's aperture.  $m_0$  is the initial, fully loaded mass of the rocket.  $m_t$  is the mass of the rocket after all fuel has been expended.

For completeness, the rocket formula can also be expressed in terms of the *Specific Impulse*,  $I_{SP}$ , of the engine. Specific Impulse is the engine's efficiency at generating thrust, and is the change of momentum produced per unit mass of fuel. Specific Impulse is a time... it is the time for which an engine can generate thrust equal to its mass in the earth's gravitational field (1g). The relationship between exhaust gas velocity and specific impulse is:

$$v_e = I_{SP} \cdot g_0$$

Using this, it is possible to write the rocket equation in terms of specific impulse:



$$\Delta V = I_{SP} \cdot g_0 \cdot \ln \left( \frac{m_0}{m_t} \right)$$

## 4.2 Calculating $\Delta V$

### 4.2.1 Value for Methalox $v_e$

The value of the exhaust gas velocity for a propulsive fuel is critical to calculate Delta V. We will calculate it from fundamentals, approaching it from specific impulse. This calculation gives the upper limit on exhaust velocity.

First, equate the kinetic energy of the exhaust gas to the chemical energy stored in the fuel:

$$E = \frac{1}{2}mv_e^2$$

$$v_e = \sqrt{\frac{2E}{M}}$$


Then:

$$\frac{\sqrt{\frac{2E}{M}}}{g} = \frac{v_e}{g} = I_{SP}$$


$\frac{E}{m}$  is chemical energy density,  $\mu$ . so we can restate specific impulse as:

$$I_{SP} = \frac{\sqrt{2\mu}}{g}$$


$\mu$  is the chemical energy in the Methalox reaction, which is:



A combustion table will, however, give the following reaction:



This is the *enthalpy change of combustion*,  $\Delta H$ . To get the correct answer, we have to factor in the enthalpy change of



which is just the heat of vaporization,  $\Delta H_{vap}$ . So  $\mu$  becomes:

$$\mu = \frac{\Delta H - \Delta H_{vap}}{m_m}$$

and:

$$I_{SP} = \frac{\sqrt{\frac{2(\Delta H - \Delta H_{vap})}{m_m}}}{g}$$

We have to vaporize two moles of water for every mole of Methane we burn through, so:

$$\Delta H_{vap} = 2 \cdot 40.2 \frac{kJ}{mol} = 80.4 \frac{kJ}{mol}$$

The relevant molar masses are  $44 \frac{g}{mol}$  for  $CO_2$  and  $18 \frac{g}{mol}$  for  $H_2O$ , so:

$$M_m = 44 + 2 \cdot 18 = 80 \frac{g}{mol}$$

From online sources,  $\Delta H = 890.3 \frac{kJ}{mol}$ . We know  $g$ , so plugging in gives us:

$$I_{SP} = 458.7s$$

In terms of exhaust velocity:

$$v_e = I_{SP} \cdot g = 4500 \frac{m}{s}$$

#### 4.2.2 Starship Delta V Values

With this value for the exhaust velocity and the above values for available fuel, we can calculate the total Delta V for the Starship in both configurations (with and without the Super Heavy Booster phase). These are shown in the following table.

Configuration	Initial Mass	Final Mass	Ln of Ratio	Total $\Delta V$
Starship Only	1430 t	230 t	1.827	8,223 $\frac{m}{s}$
Starship and Booster	5000	500	2.303	10,362 $\frac{m}{s}$

Table 5: Table of fuel capacities and volumes.

As a rule of thumb, Delta V to low earth orbit is roughly 7500 m/s.

## References

- [1] M. Bellini and A. Calvi. Dynamic analysis and loads definition for the structural design of the euclid spacecraft. In *Proceedings of the ISMA 2014-International Conference on Noise and Vibration Engineering*. ISMA, 2014.
- [2] T. Irvine. The half power bandwidth method for damping calculation. [http://www.vibrationdata.com/tutorials2/half\\_power\\_bandwidth.pdf](http://www.vibrationdata.com/tutorials2/half_power_bandwidth.pdf), 2005.
- [3] A. Law. The definitive guide to starship . <https://everydayastronaut.com/definitive-guide-to-starship/>, July 2023.
- [4] A. Shakir and S. Ez-Deen. Effect of acoustic vibration on the satellite structure at launch stage. *MS'09 INDIA*, December 2009.
- [5] SpaceX. Starship user's guide. [https://www.spacex.com/media/starship\\_users\\_guide\\_v1.pdf](https://www.spacex.com/media/starship_users_guide_v1.pdf), 2020.
- [6] Wikipedia. SpaceX raptor. [https://en.wikipedia.org/wiki/SpaceX\\_Raptor](https://en.wikipedia.org/wiki/SpaceX_Raptor), July 2023.