



CLAVITHOR (Nail wall plugs)

Product Information

- Nailing dowels for fastening to gypsum, lightweight concrete and brick surfaces
- Outdoor use
- Impact resistant
- Performs expansion

Product properties

- Tapered interior
- Operating temperature -10°C to +70°C (14°F to 158°F)
- Clavithor TCP0:
 - Recommended drilling: 20 mm (3/4")
- Clavithor TCP1:
 - Recommended drilling: 25 mm (1")
- Drywall loading:
 - TCP0: 5 kg (11.02 lb)
 - TCP1: 8 kg (17.63 lb)
- Concrete loading:
 - TCP0: 10 kg (22.05 lb)
 - TCP1: 15 kg (33.07 lb)

Application/Market



Home



Office





Industry

Materials

- Color TCP0: white y TCP1: yellow
- Made of high-impact polystyrene

Recommended for installation

- Clavithor TCP0:
 - 5/64" x 3/4" (1.9 x 19.1mm) galvanized nail
- Clavithor TCP1:
 - 5/64" x 1" (1.9 x 25.4mm) galvanized nail
- Drill bits:
 - TCP0 - 3/16" (4.76 mm)
 - TCP1 - 7/32" (5.55 mm)

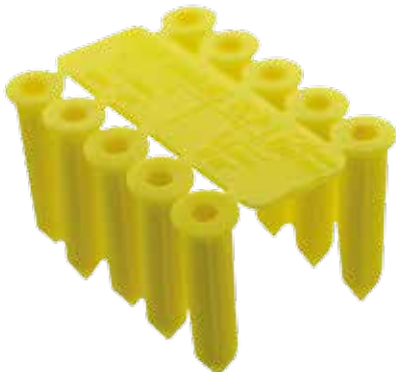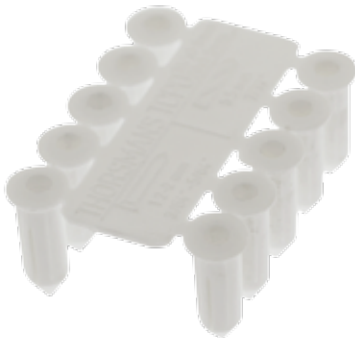

ISO 9001-2015

THORMEX, S.A. DE C.V.


Blvd. Manuel Ávila Camacho 2900-701, Fracc. Los Pirules, Tlalnepantla,
Edo. de México, C.P. 54040 • Tel: (55) 5379-67-47 Área comercial:

EXT 104, 105, 119, 120 y 128 • info@thorsmex.mx


www.thorsmex.mx




Clavithor TCP0

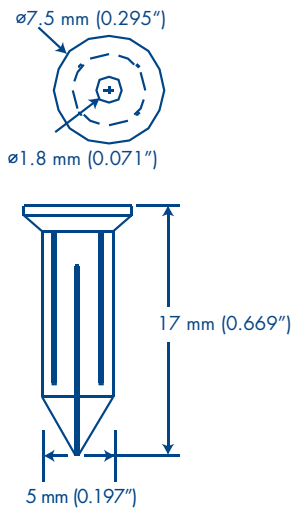

Clavithor TCP1


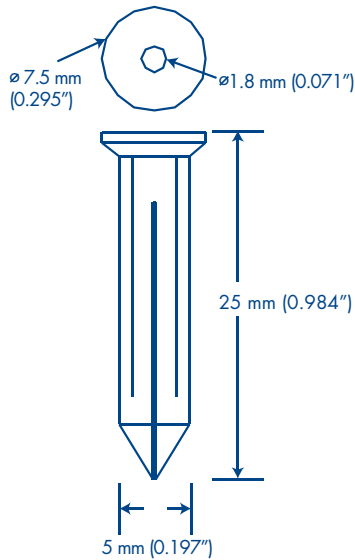


Fixing Kit TCP0 y TCP1

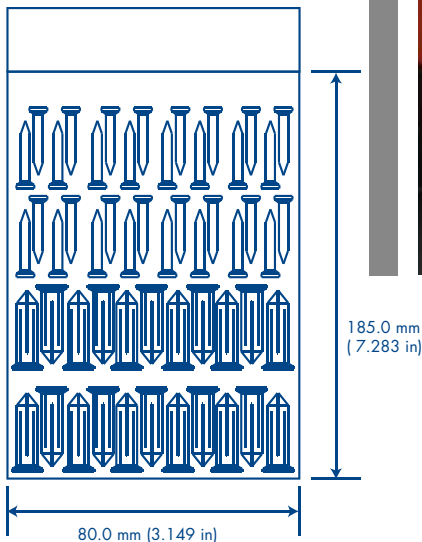

| Item | Code | Bar Code | Display Box | Color | Dimensions |
|-----------------|--------------------------|--------------------------------|---|--------|---|
| Clavithor TCP0 | 1206-01100 1206-04000 | 7501509901919 7501509900370 | Box with 100 pieces Blister with 20 pieces | White | H 17 mm (0.669 in) Ø 7.5 mm (0.295 in) |
| Fixing kit TCP0 | 1206-01230 | 7501509907744 | Bag with 40 pieces (20 clavithores and 20 nails) | White | H 185 mm (7.283 in) x W 80 mm (3.149 in) |
| Clavithor TCP1 | 1207-02100 1207-04000 | 7501509901926 7501509900387 | Box with 100 pieces Blister with 20 pieces | Yellow | H 25 mm (0.984 in) Ø 7.5 mm (0.295 in) |
| Fixing kit TCP1 | 1207-03230 | 7501509907737 | Bag with 40 pieces (20 clavithores and 20 nails) | Yellow | H 185 mm (7.283 in) x W 80 mm (3.149 in) |

APPLICATION

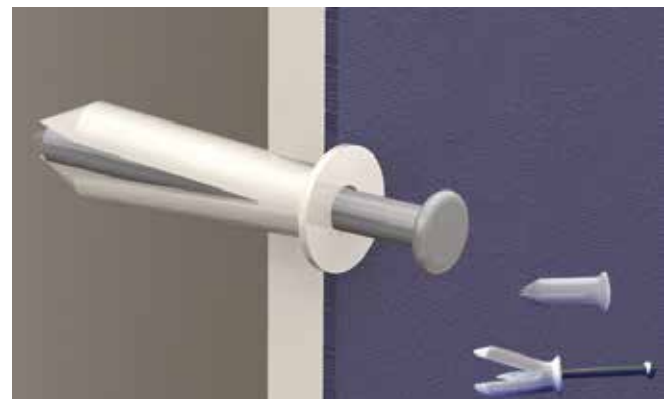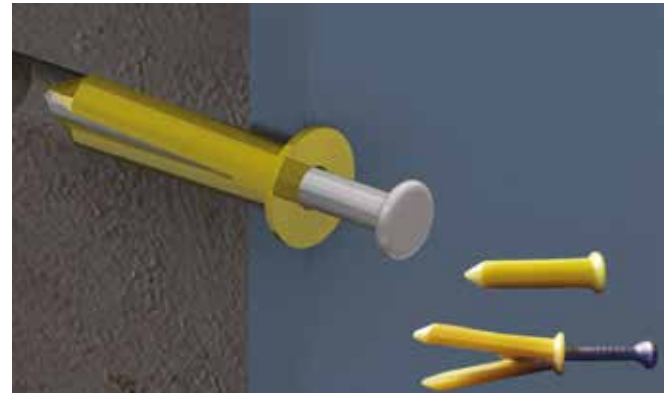

ISO 9001-2015

THORMEX, S.A. DE C.V.

Bld. Manuel Ávila Camacho 2900-701, Fracc. Los Pirules, Tlalnepantla,
Edo. de México, C.P.54040 • Tel: (55) 5379-67-47 Área comercial:
EXT 104, 105, 119, 120 y 128 • info@thorsmex.mx
www.thorsmex.mx