



Pyrolizer Heating Jacket (Spiral Baffle) - Design Drawings (1/2)

Sheet 1 - Radial Cross-Section (End View)

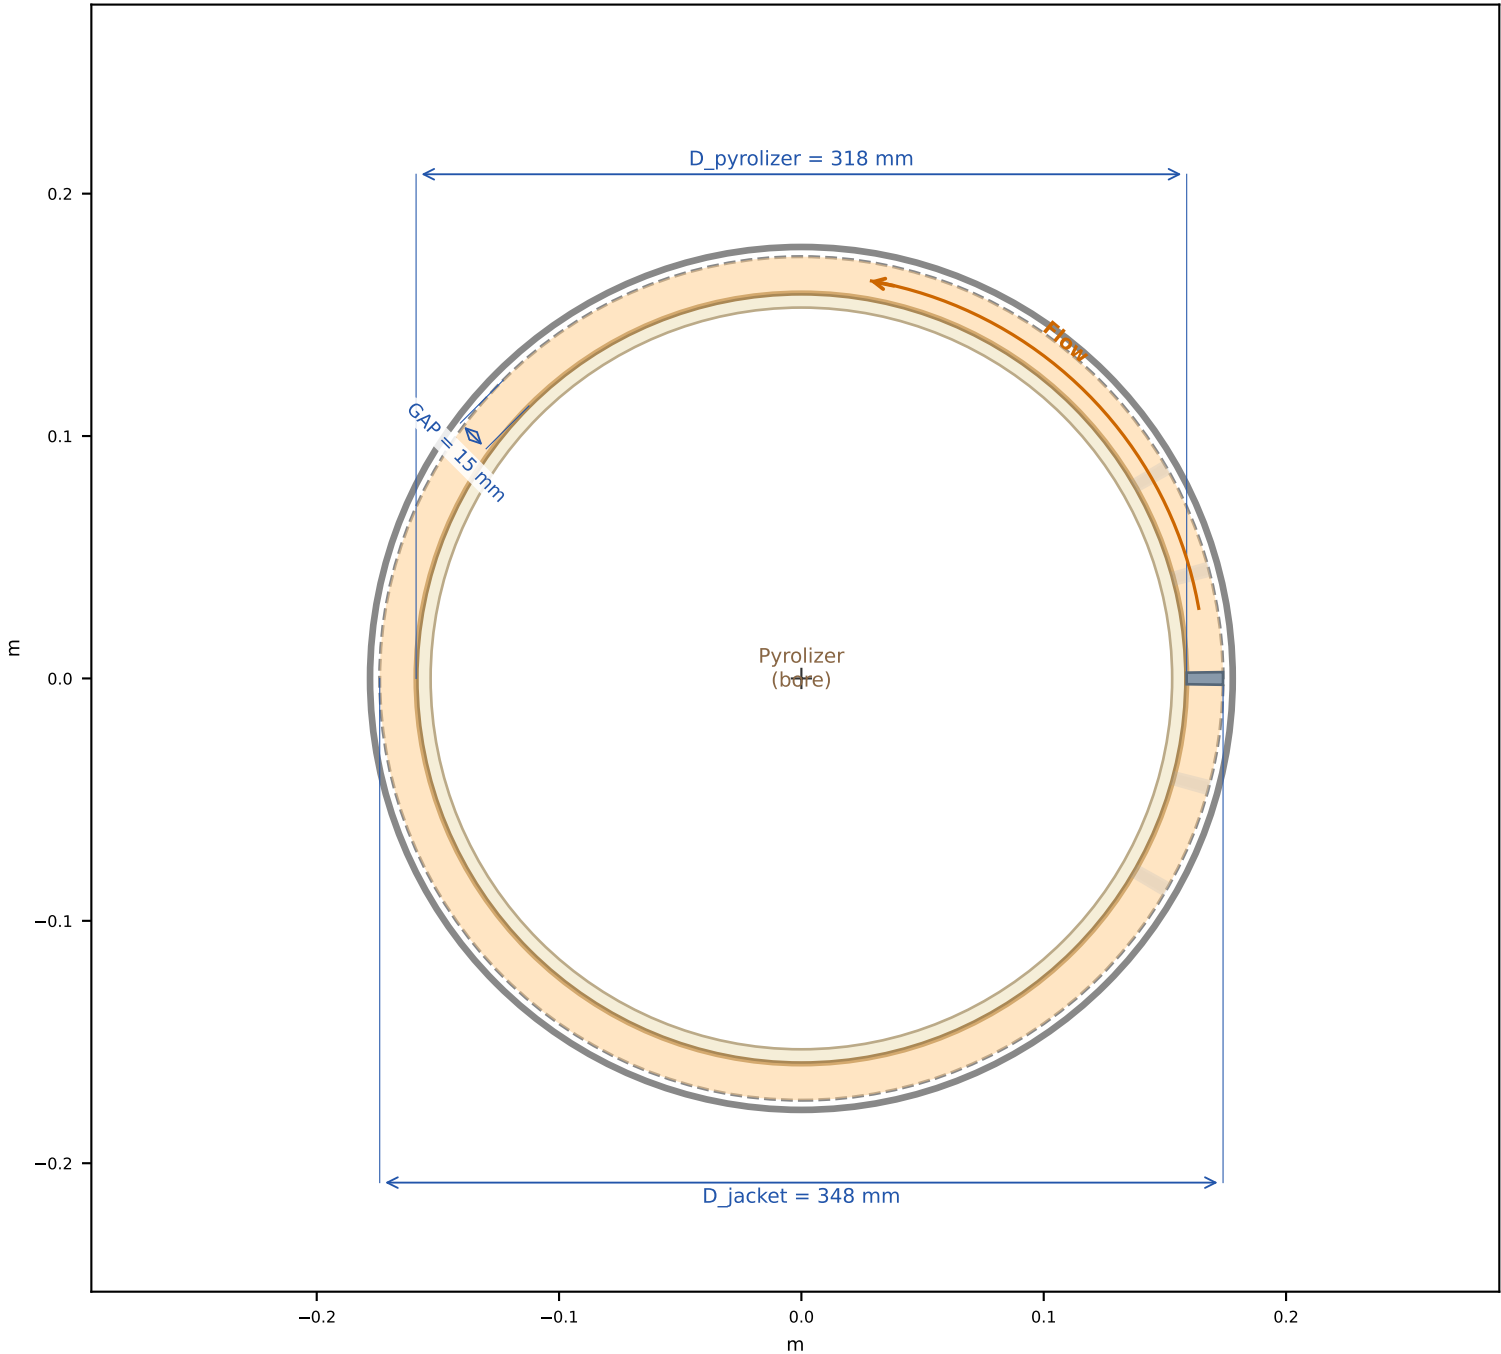


Sheet 2 - Longitudinal Section (Side Elevation)
Radial direction exaggerated (NTS)

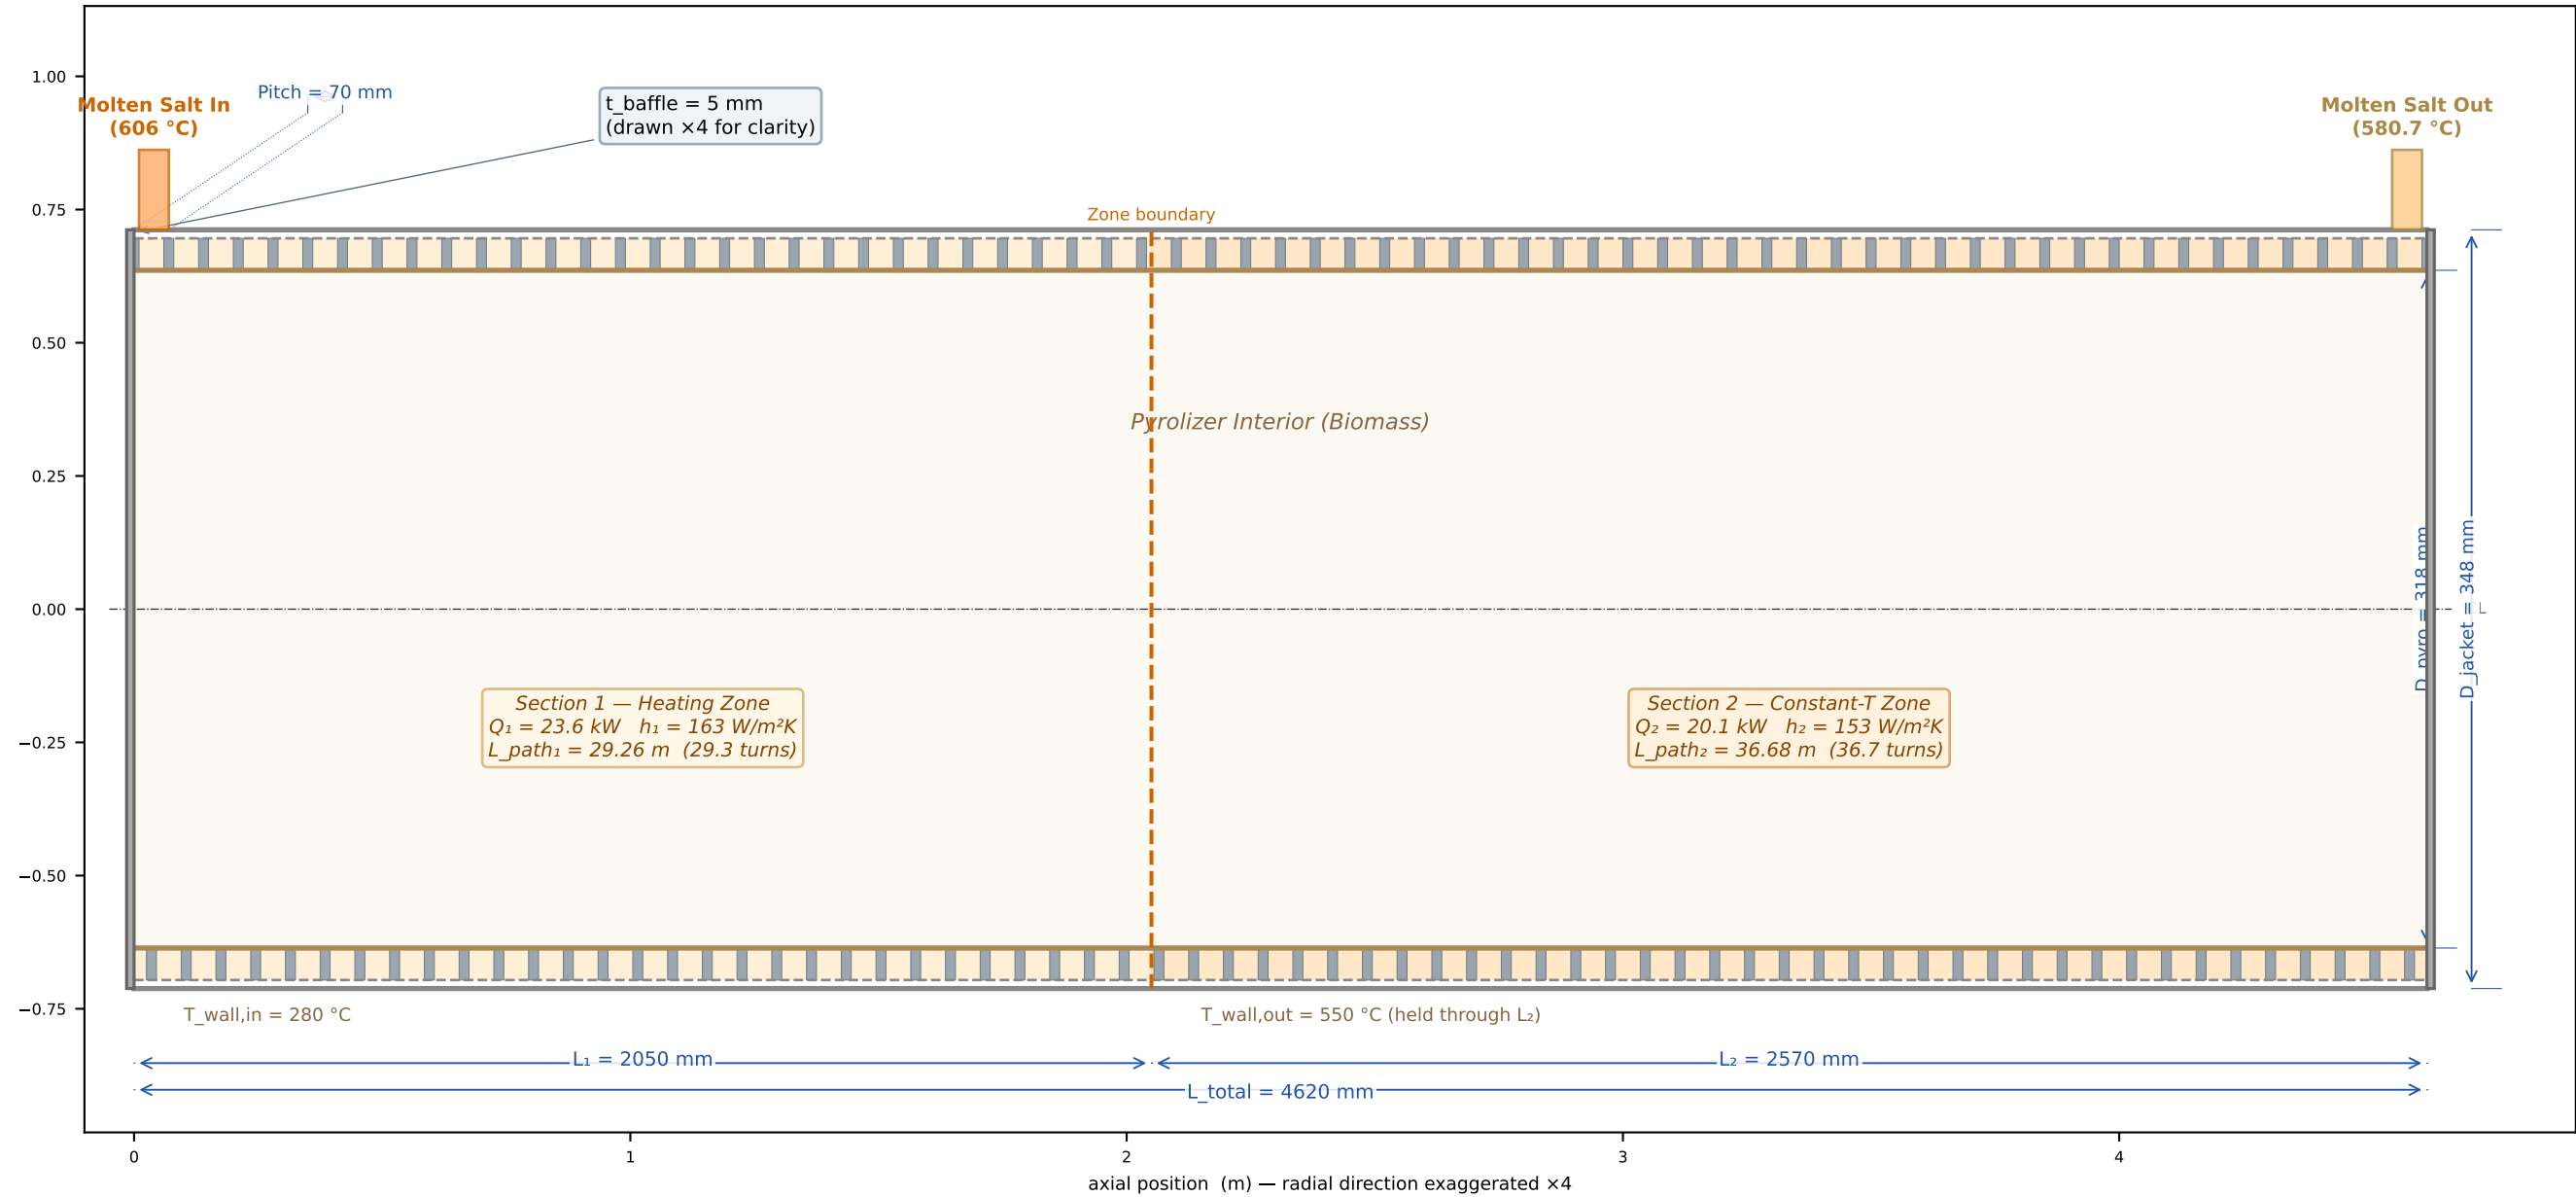


Pyrolizer Heating Jacket (Spiral Baffle) - Design Drawings (2/2)

Sheet 3 - Spiral Channel Cross-Section (Detail)

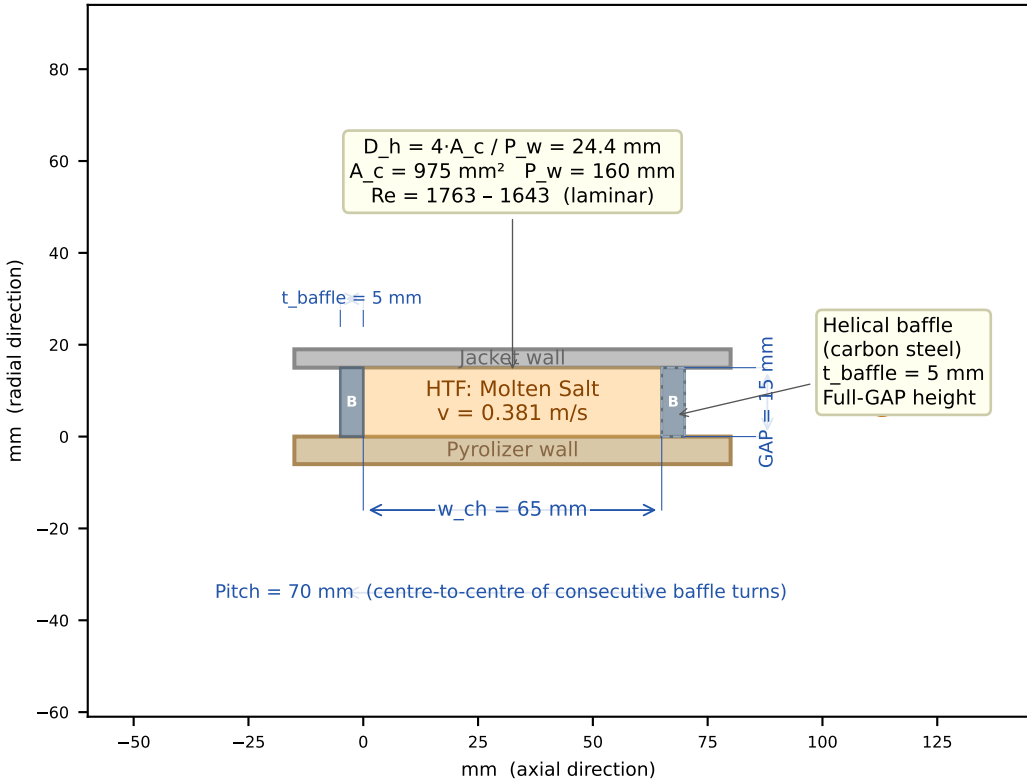

Sheet 4 - Developed View (Unrolled Cylindrical Surface)

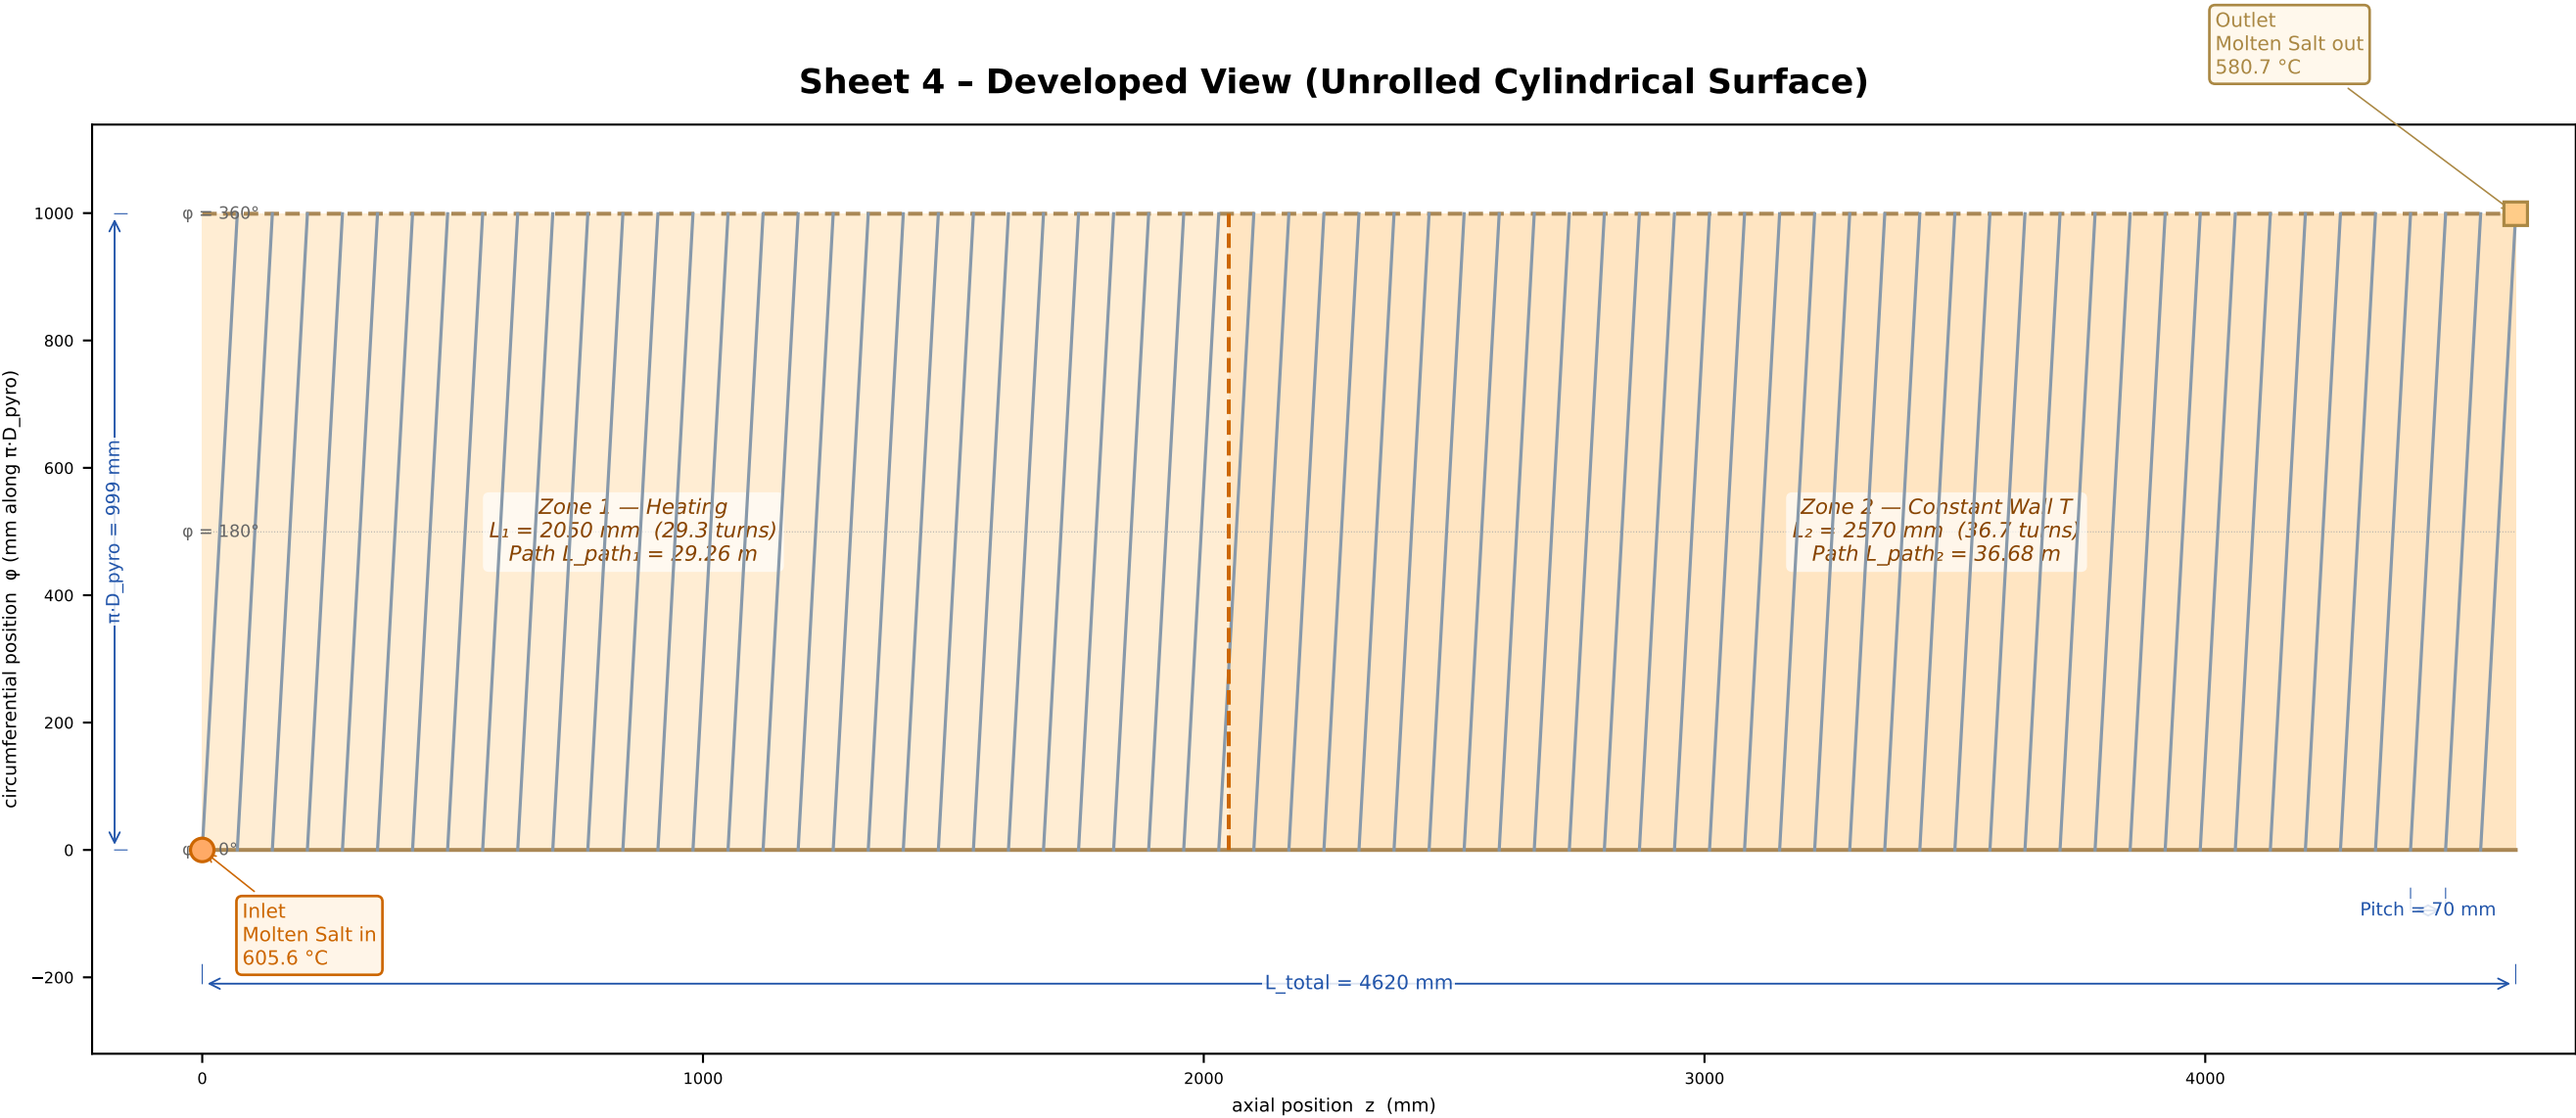

DESIGN SUMMARY ✓ SUCCESSFUL	
Zone 1 (Heating):	$Re = 1763$, $h_1 = 163.2 \text{ W/m}^2\text{K}$, $A_{\text{av}} = 2.93 \text{ m}^2 > A_{\text{req}} = 1.04 \text{ m}^2$
Zone 2 (Constant T):	$Re = 1643$, $h_2 = 152.8 \text{ W/m}^2\text{K}$, $A_{\text{av}} = 3.67 \text{ m}^2 > A_{\text{req}} = 3.64 \text{ m}^2$
Flow:	$v = 0.381 \text{ m/s}$, $\Delta P_{\text{total}} = 15.18 \text{ kPa}$
Salt path:	$605.6 \rightarrow 592.1 \rightarrow 580.7^\circ\text{C}$ Wall: $280 \rightarrow 550^\circ\text{C}$ (ramp + hold)