KUKA

KUKA Foundry Robots.





_Foundry

Our Foundry robots are all-rounders in the world of the foundry and forging industry.

Robots need to meet a number of requirements for the new, innovative casting processes: a surface that is resistant to heat, corrosion, alkalis and acid is essential, as are special seals on the motor and gear unit flanges. The Foundry wrists of the KUKA robots hold gripper tooling made of heat-resistant special steel and are provided with a special paint finish. This makes even higher heat resistance possible in this especially critical area. The robot wrist and in-line wrist are provided with redundant safety through sealing air and high-quality Viton seals with thermal and chemical resistance.

Wide product range. KUKA foundry robots for payloads of 20 to 1,300 kilograms can do almost anything.



KR CYBERTECH F



KR IONTEC F



KR QUANTEC F



KR FORTEC F



KR FORTEC ultra F



KR TITAN ultra F

KR CYBERTECH



The Foundry robot from our proven KR CYBERTECH family.

Reach
2,010 mm

Payload
20 kg

KR CYBERTECH	KR 20 R1810-1 F	KR 20 R2010-1 KS-F
Number of axes	6	6
Rated payload	20 kg	20 kg
Reach	1,813 mm	2,010 mm
Pose repeatability	±0.04 mm	±0.04 mm
Weight	250 kg	242 kg
Variants	F	F
Installation position	Floor, ceiling, wall, angle	Floor (shelf)

KR IONTEC



The KR IONTEC combines compact design with the largest working envelope in its class for optimum use of space with a small footprint. Equipped with a aterproof and dustproof inline wrist and protected motors, the robot is suitable for almost every area of application.



Reach
2,101–2,501 mm


Payload
50–70 kg

KR IONTEC	KR 70 R2100 F	KR 50 R2500 F
Number of axes	6	6
Rated payload	70 kg	50 kg
Reach	2,101 mm	2,501 mm
Pose repeatability	±0.05 mm	±0.05 mm
Weight	536 kg	559 kg
Variants	F	F
Installation position	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle

KR QUANTEC



KUKA has completely revised the standard version of its bestselling robot, ensuring that it remains state-of-the-art. KUKA presents the second generation of the special version for the foundry, forging and machining industries – more digitalized and even better than before.



Reach
2,701–3,505 mm

Payload
120–300 kg

KR QUANTEC	KR 300 R2700-2 F	KR 250 R2700-2 F	KR 240 R2900-2 F	KR 210 R3100-2 F	KR 180 R2900-2 F
Number of axes	6	6	6	6	6
Rated payload	300 kg	250 kg	240 kg	210 kg	180 kg
Reach	2,701 mm	2,701 mm	2,900 mm	3,100 mm	2,900 mm
Pose repeatability	±0.05 mm	±0.05 mm	±0.05 mm	±0.05 mm	±0.05 mm
Weight	1,101 kg	1,101 kg	1,120 kg	1,134 kg	1,105 kg
Variants	F	F	F	F	F
Installation position	Floor	Floor	Floor	Floor	Floor

KR QUANTEC	KR 210 R2700-2 F	KR 150 R3100-2 F	KR 150 R2700-2 F	KR 120 R3100-2 F
Number of axes	6	6	6	6
Rated payload	210 kg	150 kg	150 kg	120 kg
Reach	2,701 mm	3,100 mm	2,701 mm	3,100 mm
Pose repeatability	±0.05 mm	±0.05 mm	±0.05 mm	±0.05 mm
Weight	1,077 kg	1,105 kg	1,072 kg	1,105 kg
Variants	F	F	F	F
Installation position	Floor	Floor	Floor	Floor

KR QUANTEC	KR 120 R2700-2 F	KR 270 R3100-2 K-F	KR 210 R3300-2 K-F	KR 180 R3500-2 K-F
Number of axes	6	6	6	6
Rated payload	120 kg	270 kg	210 kg	180 kg
Reach	2,701 mm	3,105 mm	3,305 mm	3,505 mm
Pose repeatability	±0.05 mm	±0.05 mm	±0.05 mm	±0.05 mm
Weight	1,069 kg	1,260 kg	1,266 kg	1,256 kg
Variants	F	F	F	F
Installation position	Floor	Floor (shelf)	Floor (shelf)	Floor (shelf)

KR QUANTEC nano	KR 180 R2100 nano F exclusive	KR 120 R2100 nano F exclusive
Number of axes	6	6
Rated payload	180 kg	120 kg
Reach	2,100 mm	2,100 mm
Pose repeatability	±0.05 mm	±0.06 mm
Weight	approx. 998 kg	963 kg
Variants	F	F
Installation position	Floor	Floor

F Foundry variant

KR FORTEC



KR FORTEC is energy-efficient and dynamic for handling applications in the heavy-duty range up to 500 kg. Since it is based on our proven industrial robotics concepts, it requires little maintenance during operation.

Reach
2,800 –3,400 mm

Payload
240–500 kg

KR FORTEC	KR 340 R3400-2	KR 420 R3100-2	KR 500 R2800-2
Number of axes	6	6	6
Rated payload	340 kg	420 kg	500 kg
Reach	3,400 mm	3,100 mm	2,800 mm
Pose repeatability	±0.08 mm	±0.08 mm	±0.08 mm
Weight	1,728 kg	1,704 kg	1,671 kg
Variants	HI, F	HI, F	HI, F
Installation position	Floor	Floor	Floor

F Foundry variant

KR FORTEC ultra



The KR FORTEC Ultra series is specifically designed for high inertia during the handling of heavy and large workpieces. These heavy-duty robots, with payloads of up to 800 kg, offer maximum performance and impressive reach in a compact space. They are fast and highly precise.




Reach
2,800–3,700 mm

Payload
480–800 kg

KR FORTEC-2 ultra	KR 480 R3400-2	KR 480 R3700-2	KR 560 R3100-2	KR 640 R2800-2	KR 800 R2800-2
Number of axes	6	6	6	6	6
Rated payload	480 kg	480 kg	560 kg	640 kg	800 kg
Reach	3,400 mm	3,700 mm	3,100 mm	2,800 mm	2,800 mm
Pose repeatability	±0.08 mm	±0.08 mm	±0.08 mm	±0.08 mm	±0.08 mm
Weight	2,140 kg	2,460 kg	2,170 kg	2,170 kg	2,400 kg
Variants	F	F	F, HI	F, HI	F
Installation position	Floor	Floor	Floor	Floor	Floor

HI Hight Inertia (optimized for highest mass inertias)

KR TITAN ultra

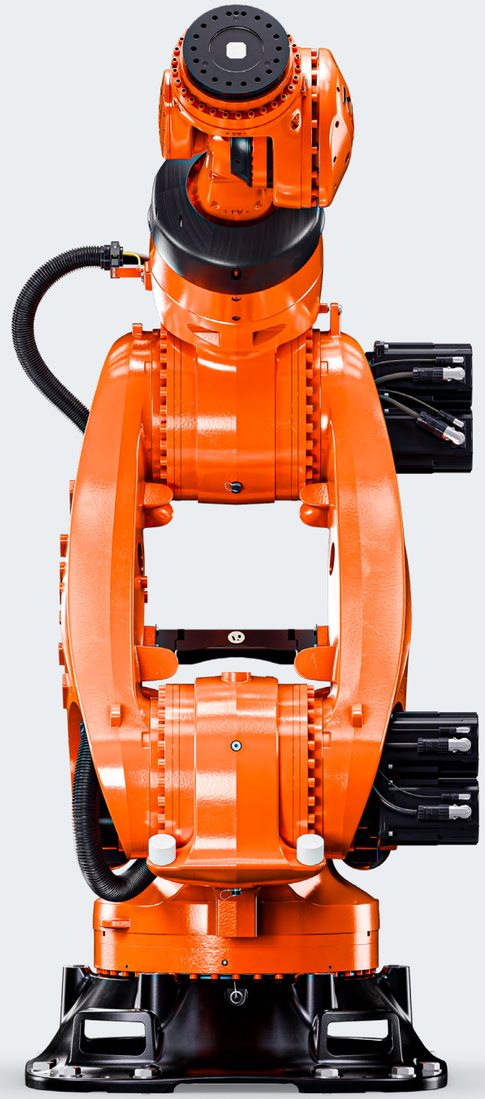

The foundry variant of the KR TITAN ultra is designed for use in extreme production environments and withstands dust, heat, and moisture. It is rated IP 65/IP 67 and, thanks to its energy-efficient design, helps reduce operating costs.



Reach
3,226–4,218 mm

Payload
1,000–1,500 kg

KR TITAN-2 ultra	KR 1500 R3200-2 F	KR 1250 R3700-2 F	KR 1000 R4200-2 F
Number of axes	6	6	6
Payload	1,500 kg	1,250 kg	1,000 kg
Reach	3,226 mm	3,726 mm	4,218 mm
Pose repeatability	±0.08 mm	±0.08 mm	±0.08 mm
Weight	4,650 kg	4,820 kg	4,750 kg
Variants	F	F	F
Installation position	Floor	Floor	Floor

F Foundry variant



kuka.com/contacts
facebook.com/kukaglobal
youtube.com/kukarobotgroup
linkedin.com/company/kukaglobal
instagram.com/kukaglobal

31.08.2026

Details provided about the properties and usability of the products are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered is determined by the subject matter of the specific contract. No liability accepted for errors or omissions. Subject to alterations. © 2026 KUKA

www.kuka.com

PB|Portfolio|EN|10|0826