

UNIVERSITY OF LEIPZIG

ADVANCED LABS

Lab report

Doppler-free Rb saturation spectroscopy with an external cavity diode laser

Jamal Ghaith 3792970

Anas Roumieh 3766647

Conducted on: 14.05.2024

Contents

1	Introduction	1
2	Analysis	1
2.1	Task 1	1
2.1.1	Scaling the data	1
2.1.2	Determining the finesse	2
3	Conclusion	2
	Appendices	3
	Bibliography	4

1 Introduction

$$\mathcal{F} = \frac{\nu_{\text{FSR}}}{\delta\nu} \quad (1)$$

2 Analysis

2.1 Task 1

We were instructed to scale our measurement data using the FPI peaks in addition to determining the finesse.

2.1.1 Scaling the data

From [1], we know that our FSR is 1 GHz. Therefore, if the average spacing between peaks is calculated, we can determine the conversion factor and scale our data accordingly.

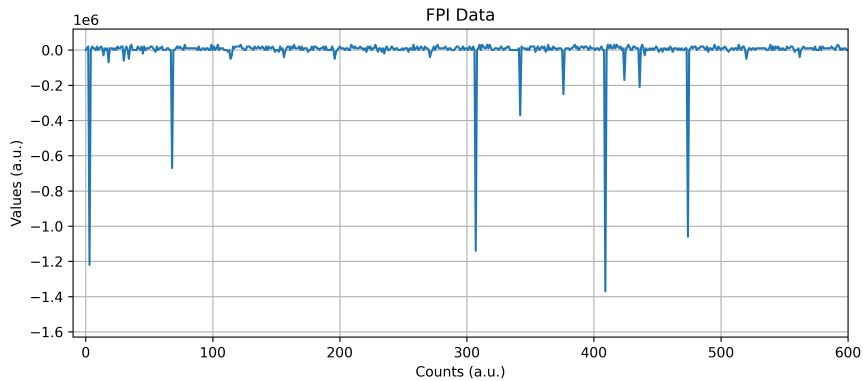


Figure 1: Peaks in the FPI spectrum, from task 4. Note: This is only a section of the plot.

This data was then flipped and normalized by the maximum value to obtain the following plot:

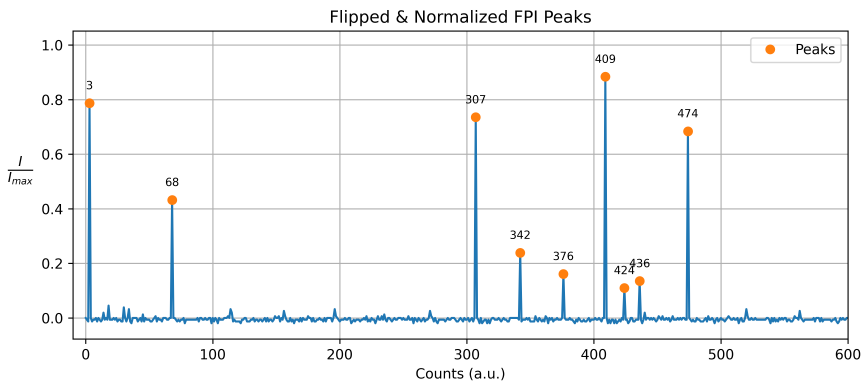


Figure 2: Normalized peaks in the FPI spectrum.

The average spacing between peaks was calculated to be ≈ 56.15 , meaning there are

$$\approx \frac{1 \text{ GHz}}{56.15 \text{ counts}} \approx 0.0178 \frac{\text{GHz}}{\text{count}}$$

Scaling the data using this conversion factor, we obtain the following plot:

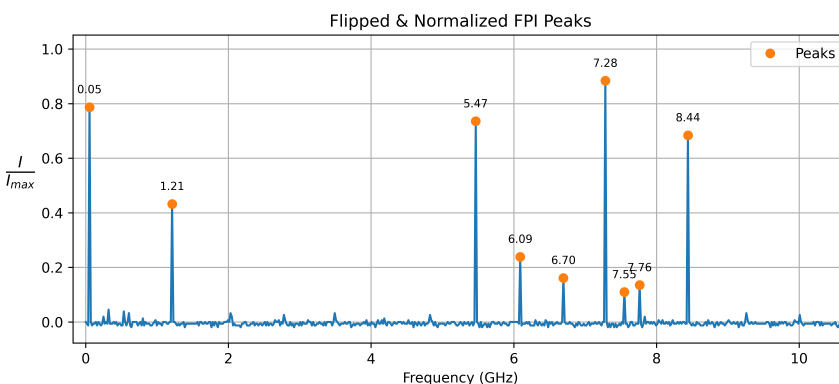


Figure 3: Scaled data using the FPI peaks.

2.1.2 Determining the finesse

Using equation 1, the FWHM for a selected FPI peak can be used to find the finesse. The following shows a Lorentzian fit on a selected peak:

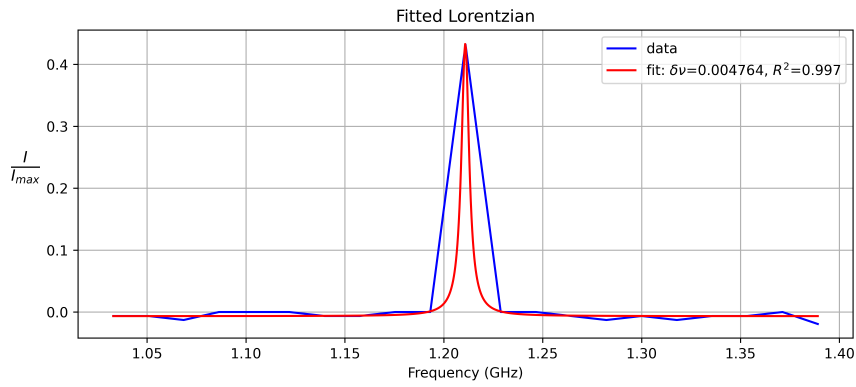


Figure 4: Lorentzian fit on a selected FPI peak.

From the fit, $\delta\nu \approx 0.00476$ GHz Hence, the finesse is

$$\mathcal{F} = \frac{\nu_{\text{FSR}}}{\delta\nu} = \frac{1 \text{ GHz}}{0.00476 \text{ GHz}} \approx 209.9$$

3 Conclusion

Appendices

Bibliography

- [1] F. Jung, “Doppler-free rb saturation spectroscopy,” 2018.