


ESP32-C6 wake supervisor + BLE/Wi-Fi pairing + sensors

C6 owns the heartbeat (HB-01..08): it watches PIR/radar, wakes the SoC rail
(EN_CAM via GPIO18), hosts the fuel gauge on I2C, and gates solar charging
(SOLAR_OK, pack-temp interlock < 0C = PWR-08). BLE pairs the app (PR-03).

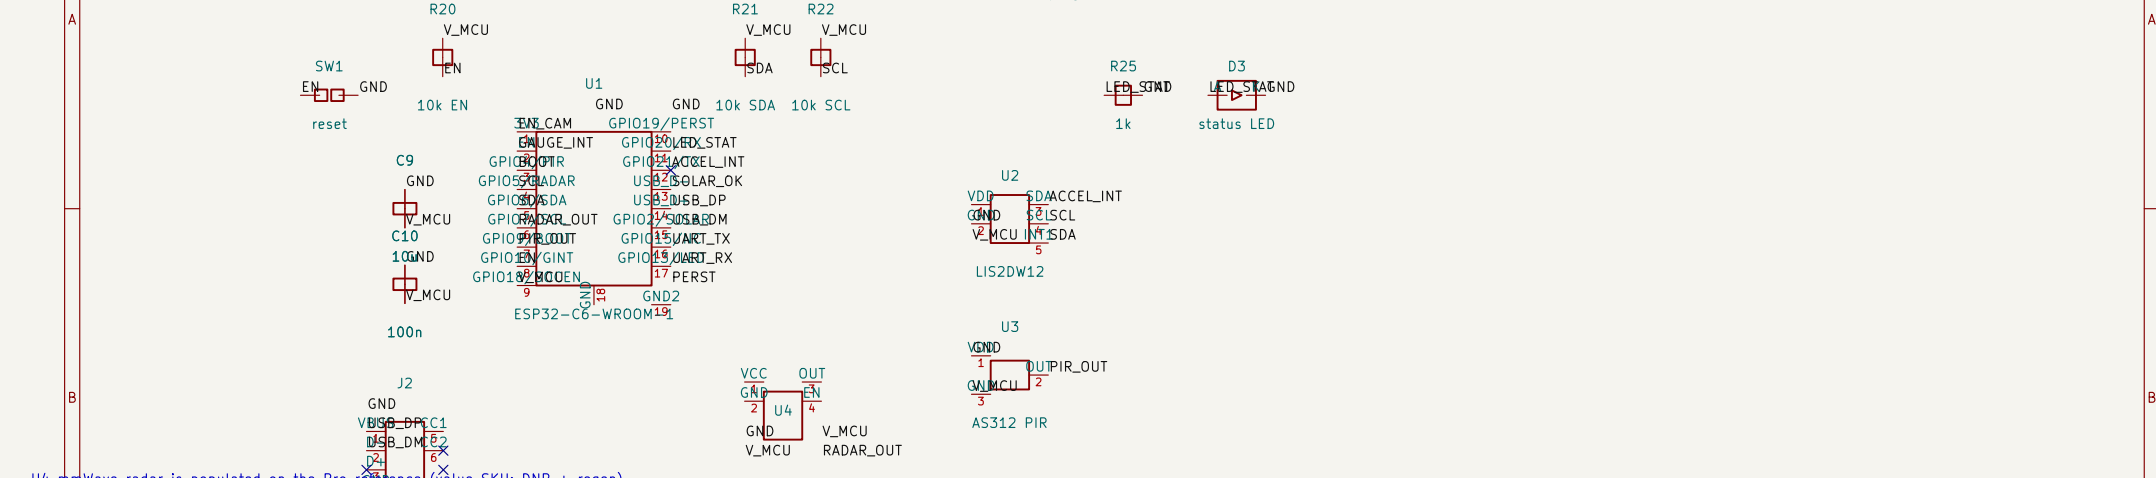

U4 mmWave radar is populated on the Pro reference (value SKU: DNP + regen).
J2 USB-C service shares USB_DP/DM with the modem (radio sheet); CC 5.1k on layout.
J1 2x03: 3V3, EN, TX, RX, GND, IO9(BOOT) for factory programming.

wapiti		
Sheet: /		
File: mcu.kicad_sch		
Title: wapiti MCU: ESP32-C6 supervisor + PIR + radar + accel		
Size: A4	Date: 2026-10-04	Rev: 0.1
KiCad E.D.A. 10.0.5		Id: 1/1