


5U LTE Cat-1bis + GNSS, eSIM multi-IMSI, SMA LTE antenna

1bis (5M UL) is the photo-delivery class; LTE-M variant is an S6 study (deep rural).

J2 = User-replaceable SMA (CAM-14 / Competitive-analysis row 16).

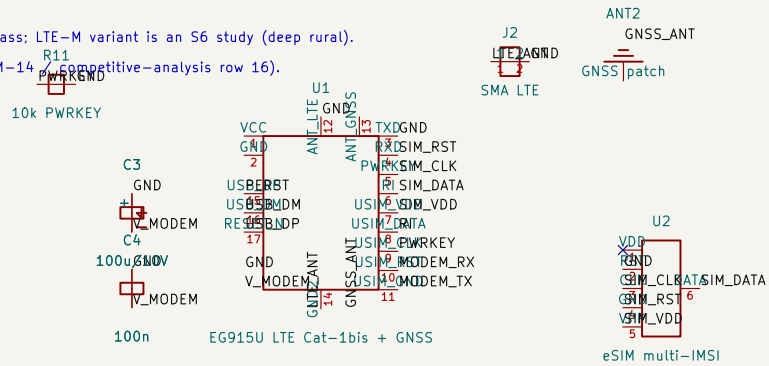

GNSS patch ANT2 under the lid RF membrane (0.8 mm thick; chassis keep-out).

J3 USB-C service: modem firmware + C6 flashing (C6 = USB_DP/USB_DM).

PWRKEY (10k R11) + RESET_N (PERST from C6 GPIO4); R1 reserved for ring wake.

USB-C service

wapiti

Sheet: /

File: radio.kicad_sch

Title: wapiti Radio: EG915U LTE Cat-1bis + GNSS + eSIM + SMA

Size: A4

Date: 2026-10-04

Rev: 0.1

KiCad E.D.A. 10.0.5

Id: 1/1