


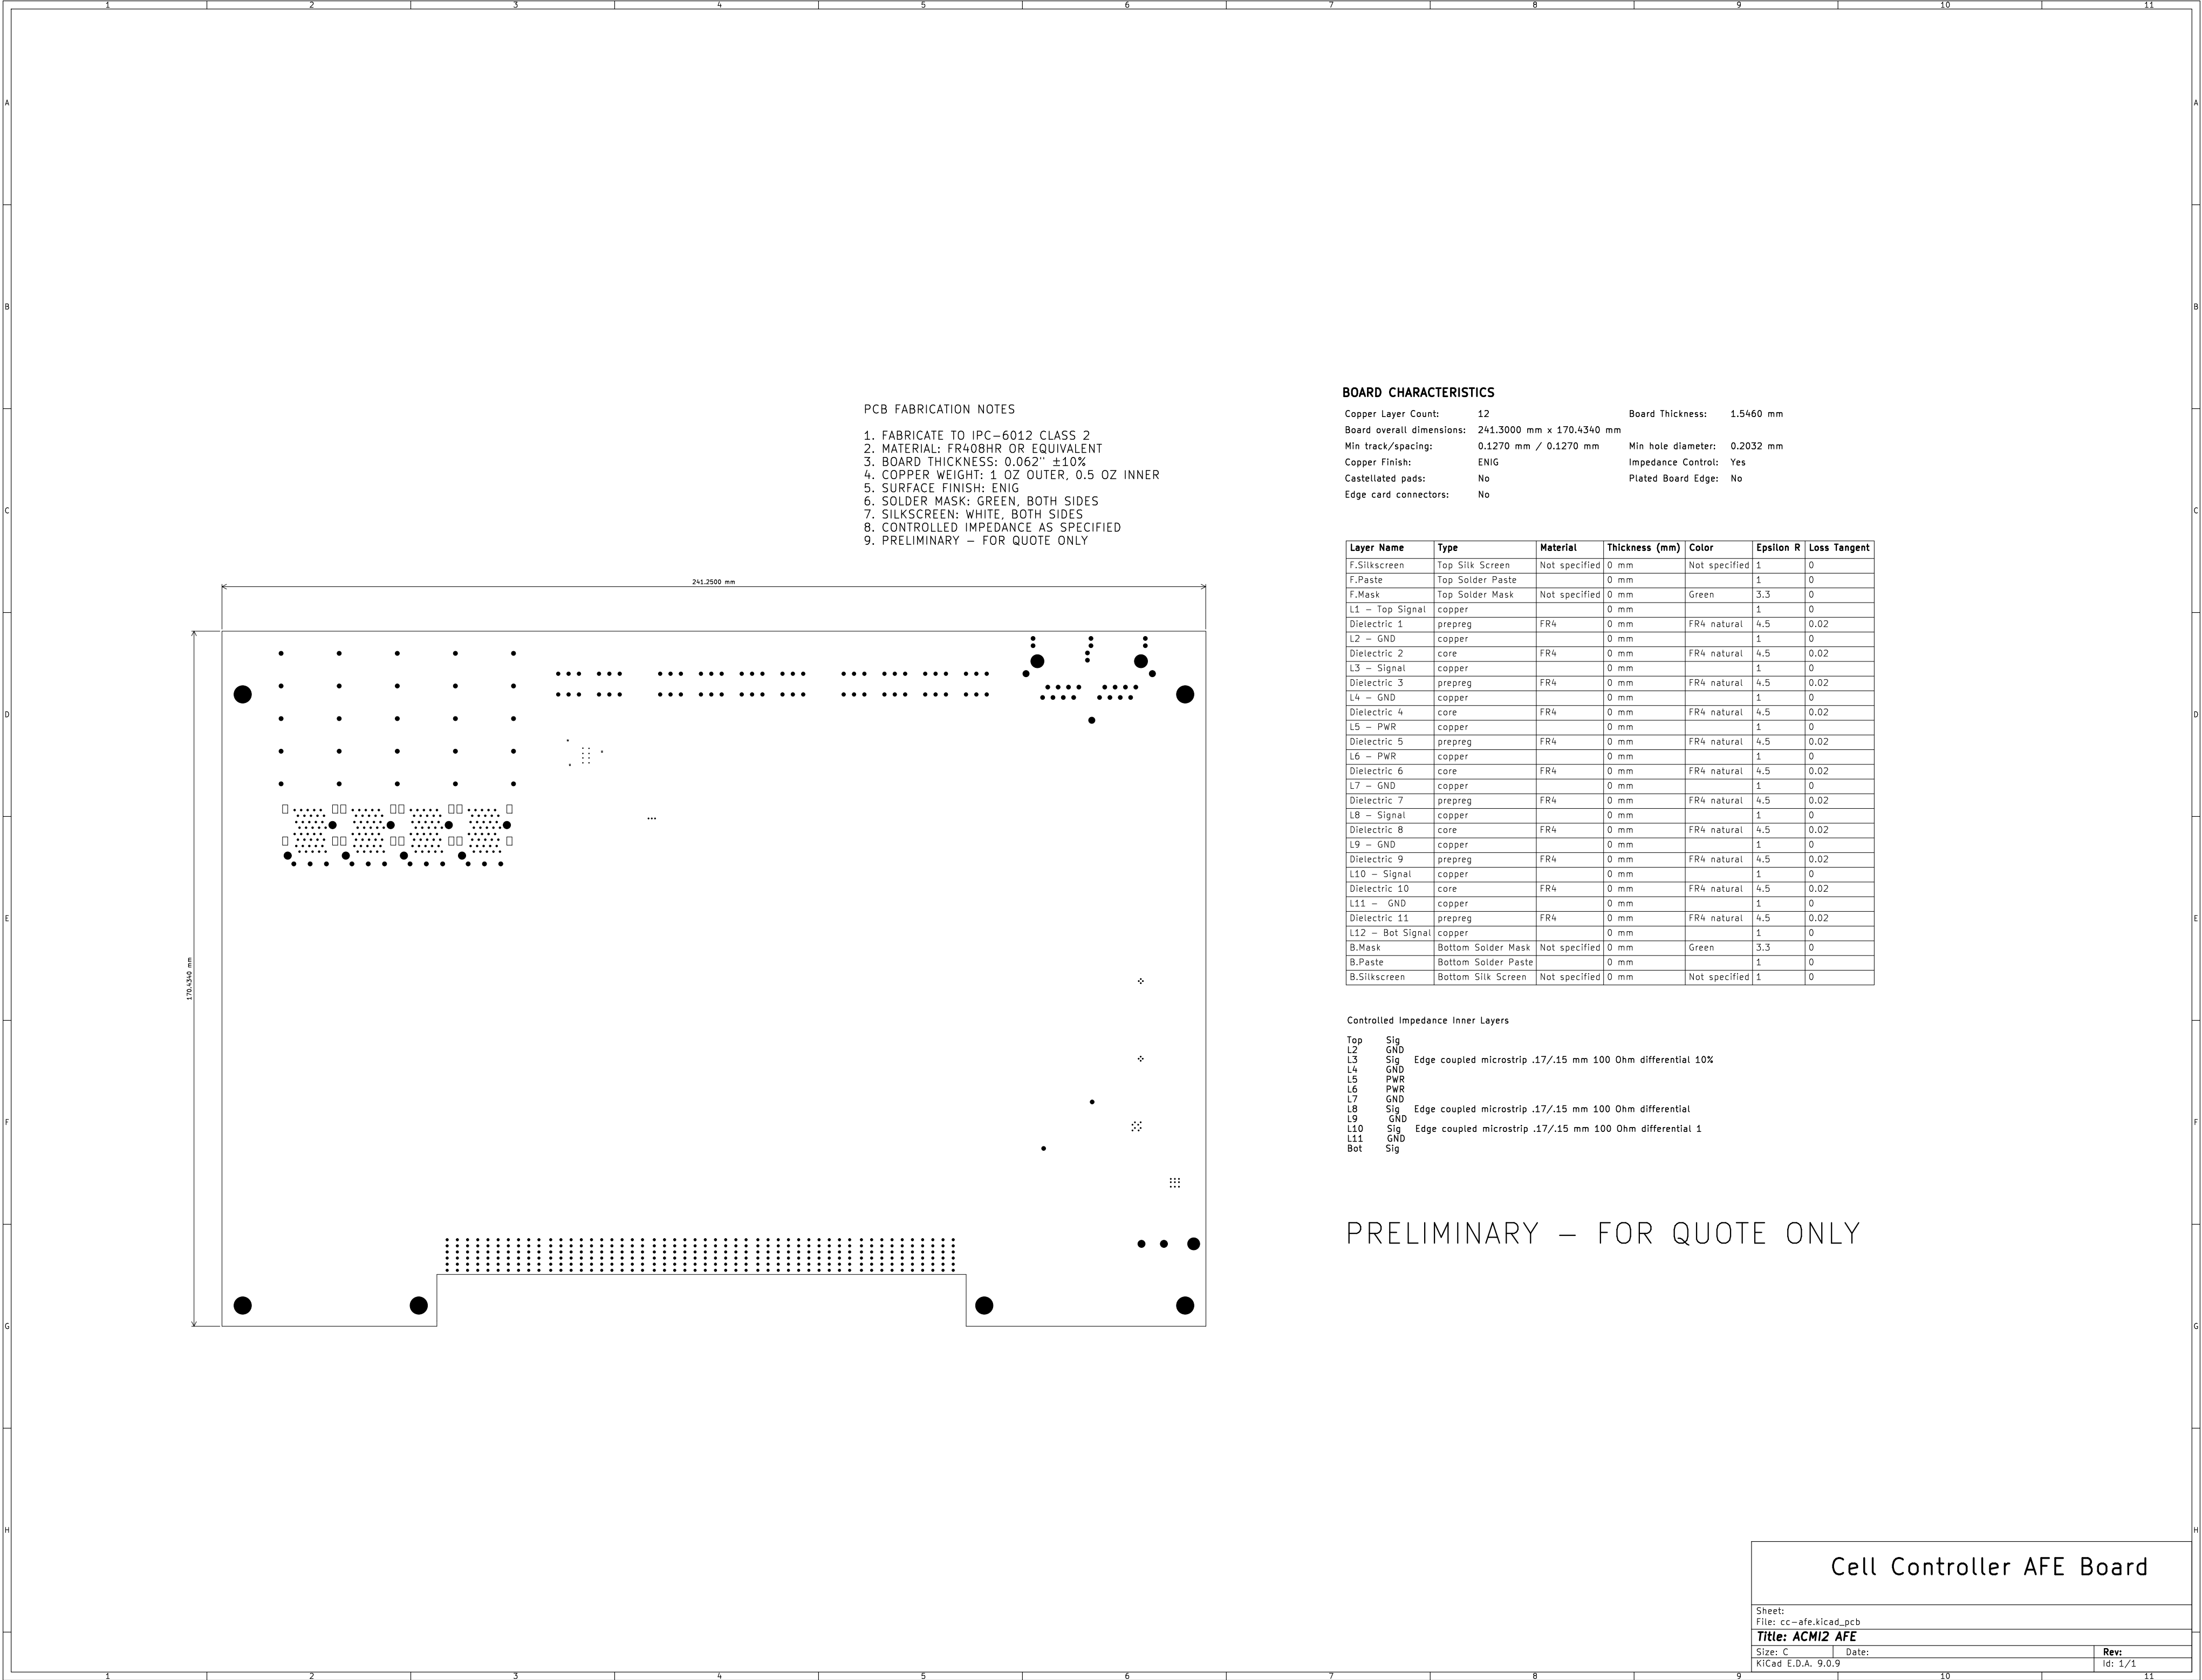

PCB FABRICATION NOTES

1. FABRICATE TO IPC-6012 CLASS 2
2. MATERIAL: FR408HR OR EQUIVALENT
3. BOARD THICKNESS: 0.062" ±10%
4. COPPER WEIGHT: 1 OZ OUTER, 0.5 OZ INNER
5. SURFACE FINISH: ENIG
6. SOLDER MASK: GREEN, BOTH SIDES
7. SILKSCREEN: WHITE, BOTH SIDES
8. CONTROLLED IMPEDANCE AS SPECIFIED
9. PRELIMINARY – FOR QUOTE ONLY

BOARD CHARACTERISTICS

Copper Layer Count: 12 Board Thickness: 1.5460 mm
Board overall dimensions: 241.3000 mm x 170.4340 mm
Min track/spacing: 0.1270 mm / 0.1270 mm Min hole diameter: 0.2032 mm
Copper Finish: ENIG Impedance Control: Yes
Castellated pads: No Plated Board Edge: No
Edge card connectors: No

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0 mm	Green	3.3	0
L1 – Top Signal	copper		0 mm		1	0
Dielectric 1	prepreg	FR4	0 mm	FR4 natural	4.5	0.02
L2 – GND	copper		0 mm		1	0
Dielectric 2	core	FR4	0 mm	FR4 natural	4.5	0.02
L3 – Signal	copper		0 mm		1	0
Dielectric 3	prepreg	FR4	0 mm	FR4 natural	4.5	0.02
L4 – GND	copper		0 mm		1	0
Dielectric 4	core	FR4	0 mm	FR4 natural	4.5	0.02
L5 – PWR	copper		0 mm		1	0
Dielectric 5	prepreg	FR4	0 mm	FR4 natural	4.5	0.02
L6 – PWR	copper		0 mm		1	0
Dielectric 6	core	FR4	0 mm	FR4 natural	4.5	0.02
L7 – GND	copper		0 mm		1	0
Dielectric 7	prepreg	FR4	0 mm	FR4 natural	4.5	0.02
L8 – Signal	copper		0 mm		1	0
Dielectric 8	core	FR4	0 mm	FR4 natural	4.5	0.02
L9 – GND	copper		0 mm		1	0
Dielectric 9	prepreg	FR4	0 mm	FR4 natural	4.5	0.02
L10 – Signal	copper		0 mm		1	0
Dielectric 10	core	FR4	0 mm	FR4 natural	4.5	0.02
L11 – GND	copper		0 mm		1	0
Dielectric 11	prepreg	FR4	0 mm	FR4 natural	4.5	0.02
L12 – Bot Signal	copper		0 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0 mm	Green	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Controlled Impedance Inner Layers

Top Sig
L2 GND
L3 Sig Edge coupled microstrip .17/.15 mm 100 Ohm differential 10%
L4 GND
L5 PWR
L6 PWR
L7 GND
L8 Sig Edge coupled microstrip .17/.15 mm 100 Ohm differential
L9 GND
L10 Sig Edge coupled microstrip .17/.15 mm 100 Ohm differential 1
L11 GND
Bot Sig

PRELIMINARY – FOR QUOTE ONLY

Cell Controller AFE Board

Sheet:			
File: cc-afe.kicad_pcb			
Title: ACM12 AFE			
Size: C	Date:	Rev:	
KiCad E.D.A. 9.0.9		Id: 1/1	