MICROWAVE BI-LEVEL SENSOR

MSM-HTI/401/NLC

Accessory | Sensor | Indoor | Bi-Level | Microwave | Wired

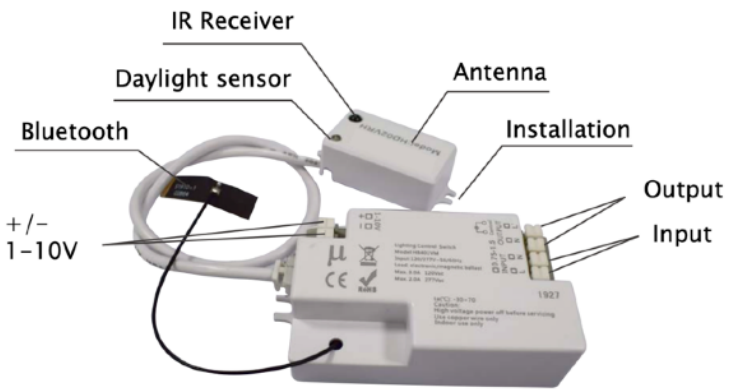

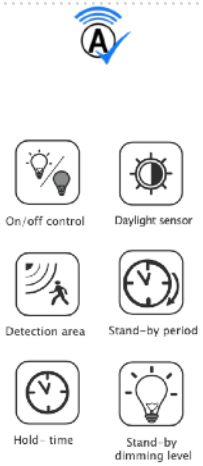

LBLP-series:

LPVT-series:



LPNR-series:

LBVR-series:

Product Number	HD401VMS
Operating Voltage	120-277V, 50/60Hz
Standby Power	<1W
IP Rating	IP20
Detection Area	50% | 100%
Hold-Time	5S | 30S | 1min | 10min
Daylight Threshold	2Lux | 10Lux | 50Lux | Disable
Standby Period	0sec | 30sec | 20min | ∞
Standby Dimming Level	10% | 20% | 30% | 50%
Microwave Frequency	5.8GHz±75MHz
Microwave Power	<0.3mW
Mounting Height	Max: 20FT (Ceiling Mount), 10FT (Wall Mount)
Detection Range	Max: 46FT (Ceiling Mount), 33FT (Wall Mount)
Operating Temperature	-4°F — 140°F

APPLICATION

MSM-HTI/401/NLC can be integrated with a lighting fixture to provide multiple occupancy sensing control schemes with multi-level or continuous dimming by sensing the presence and movements of the occupant and the daylight available in the space. A basic wiring diagram is included at next page for reference.

COMPATIBLE SERIES

planoⒶRCH

- LBLP-series
- LPVT-series
- LPNR-series
- LBVR-series

WIRING DIAGRAM



DETECTION COVERAGE

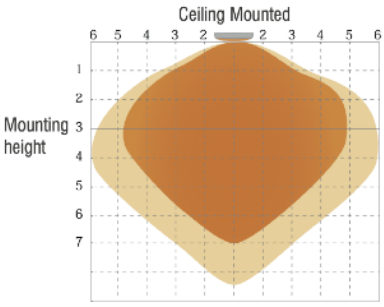

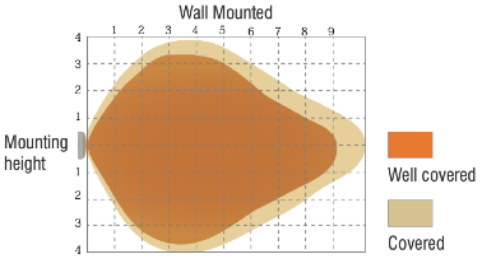

FUNCTION & APPLICATIONS

With sufficient ambient brightness, even motion get detected, lights keep off.

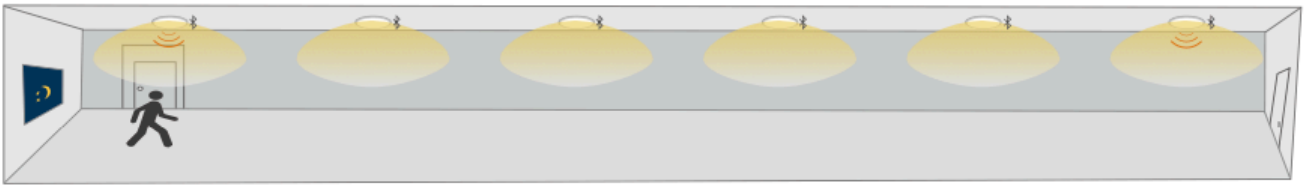

With insufficient ambient brightness, all lamps will switch on simultaneously if any movement get detected by any master sensor from any direction.

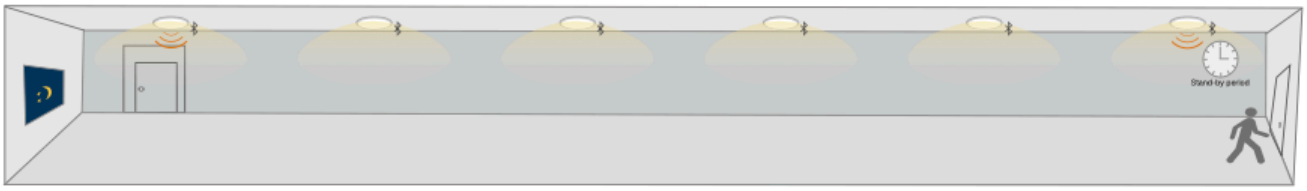

All lamps dim to preset stand-by dimming level if no movement triggers the sensor after holdtime.

All lamps switch off if no movement triggers after stand-by period.

ARCHIPELAGO LIGHTING

Archipelago Lighting, Inc. is a leading prime manufacturer of commercial and residential lighting products in USA and China. We are a team of passionate lighting professionals whose goal is to improve life through disruptive LED lighting products. We manufacturer a wide variety of products to support the growing adoption of energy efficient LED.