



VCC-BAT: 2.7V~5.5V 600mA  
 VDD-3V3: Supply PA, IO and Flash.  
 2.7V~3.5V 400mA  
 VDD25-EF: Supply Key,  
 2.4V~2.6V 40mA




## FLASH

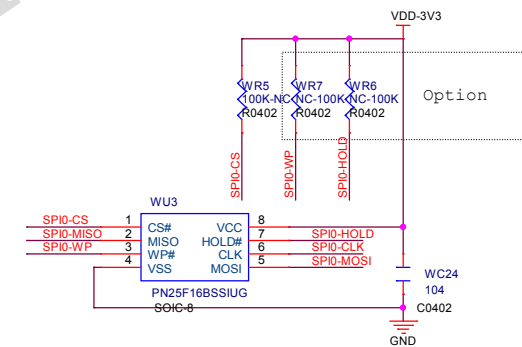

## CLK



LOSC



HOSC

## Key power supply

VDD25-EF

## CHIP RESET

