

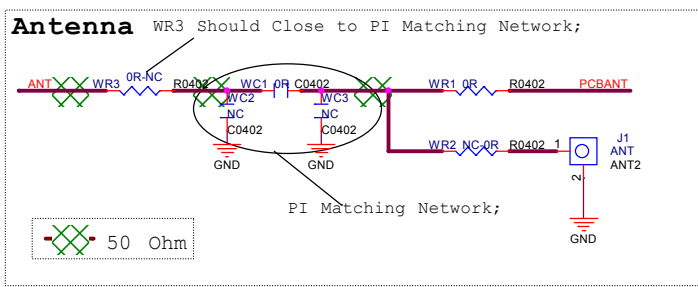




VCC-BAT: 2.7V~5.5V 600mA  
VDD-3V3: Supply PA, IO and Flash.  
2.7V~3.5V 400mA  
VDD25-EF: Supply Key,  
2.4V~2.6V 40mA

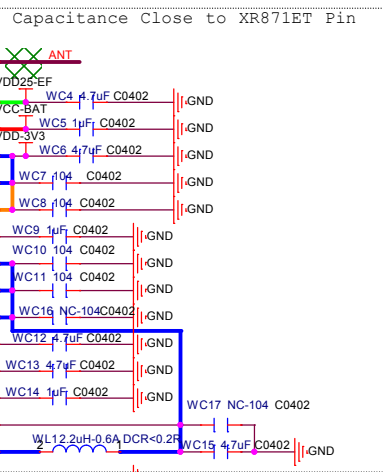

## FLASH

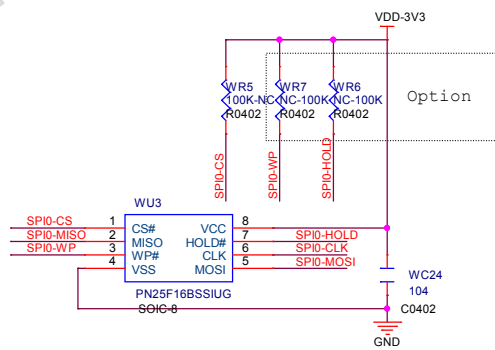

## CLK



## HOSC

## Key power supply



## CHIP RESET

