

Simulation-Based Engineering Lab
University of Wisconsin-Madison
Technical Report TR-2025-04

A validation study for the Chrono::PowerElectronics model of a brushed
electric motor

Jamiul Haque¹, Patrick Chen¹, Bret Witt¹,
Federico Reato², Matteo Santelia³, Dan Negrut¹

¹ Dept. of Mechanical Engineering
University of Wisconsin-Madison
1513 University Avenue, Madison, WI, USA

² R&D Department
Iseo Serrature Spa - Microhard SRL
Via S. Girolamo, 13, Pisogne, 25055, Italy

³ Dept. of Mechanical Engineering
Politecnico di Milano
Via La Masa, 1 I-20156 Milan, Italy

March 26, 2025

Contents

1	Introduction	2
2	Description of the brushed electric motor & dyno testbed	2
3	Chrono Brushed Electric Motor & Dyno Testbed Models	3
4	Plots to explain the Simulation parameters -	5
5	Validation study results	8
6	Conclusions and future Work	9

1 Introduction

This technical report documents a validation study of the Chrono::PowerElectronics (Chrono::PE) model for a brushed electric motor. The purpose of this effort is to replicate the behavior of a physical brushed motor using a high-fidelity simulation in Chrono and to compare the results to experimental data collected on a custom dyno testbench. This work contributes to ongoing efforts in simulation-based modeling of power electronics and electromechanical systems.

2 Description of the brushed electric motor & dyno testbed

The validation study begins with a detailed characterization of the brushed DC motor used in both experimental and simulation environments. Understanding the motor's electrical and mechanical properties is critical to building an accurate digital twin in Chrono. The following parameters were measured or estimated through experimental procedures:

- **Inductance (L) & Resistance (R):** These fundamental electrical parameters were measured directly and are essential to capturing the motor's dynamic response to PWM input. They influence the current ripple and the time constant of the motor's electrical system.

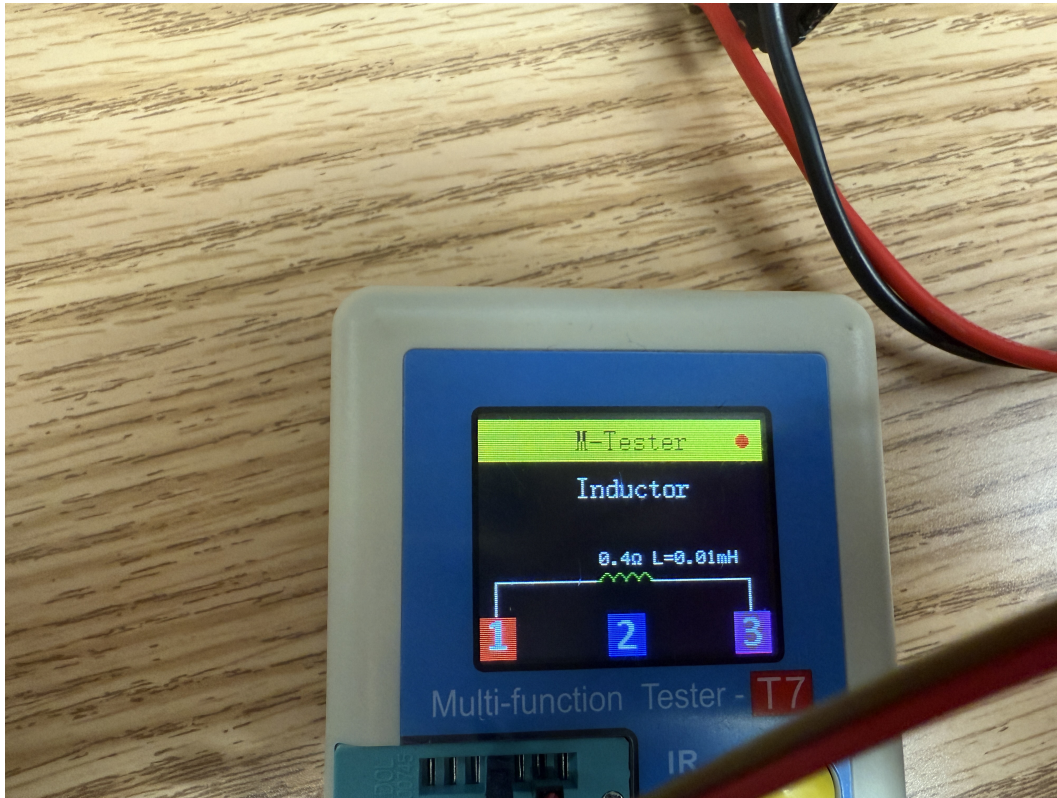


Figure 1: Measuring the rotor winding parameters

- **Torque constant (Kt):** Tested with values 100 Nm/A and 50 Nm/A to observe torque response.
- **Speed constant (Kv):** Tested at 2000 rpm/V and 1000 rpm/V to assess speed-voltage behavior.
- **Mass and Inertia:** The mass of the Rotor, Flywheel, and Gears were measured to accurately capture the mechanical dynamics of the motor system. And the geometric inertia was captured directly from SolidWorks. These values are crucial for matching acceleration and deceleration

behavior between simulation and experiment. This point applies to all the rotating bodies in the system.

Experimental Setup: The motor was mounted on a custom-designed dyno testbench, which includes:

- A flywheel (introduces inertia)
- A gear train (transmits motion)
- A secondary motor acting as a controllable load (dyno motor)

Tests were conducted with no load, constant load, and variable load conditions. Load types included constant torque values and sinusoidal torque waveforms. Data acquisition was performed at high-frequency sampling rates to ensure accurate capture of transient and steady-state motor behavior.

3 Chrono Brushed Electric Motor & Dyno Testbed Models



- **Brushed motor:** model captures electrical dynamics and electromechanical coupling using parameters extracted from measurements.
- **Dyno Testbench:** modeled to simulate different load types including constant and time-varying torque.




Figure 2: NGSpice circuit model of the DC motor

SolidWorks models were created for both the motor assembly and the dyno testbench. These models provide detailed CAD-based data, including:

- Dyno model:

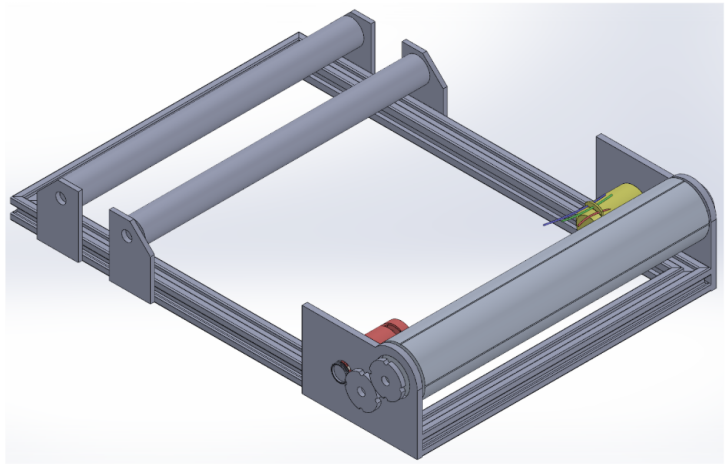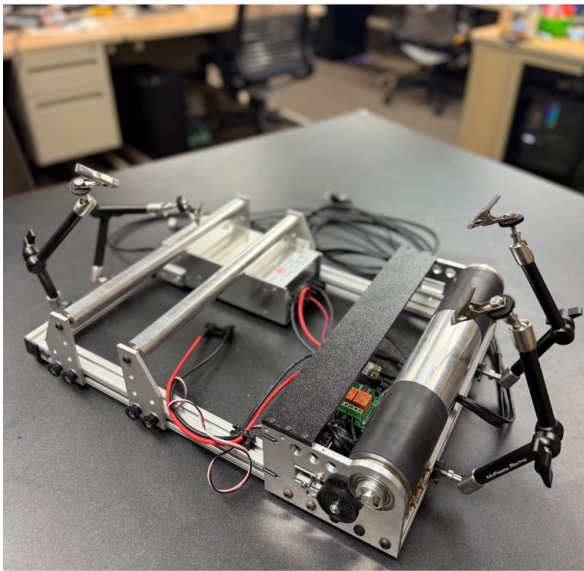

- Rotor and Rotor_winding Model:

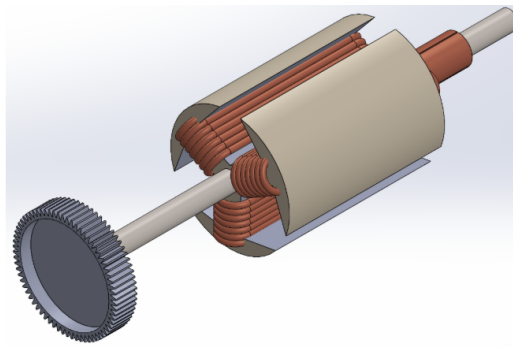

Mass = 8.50 grams

Volume = 8502.83 cubic millimeters

Surface area = 11775.22 square millimeters

Center of mass: (millimeters)

X = 0.00

Y = 0.00

Z = -39.78

Principal axes of inertia and principal moments of inertia: (grams * square millimeters)

Taken at the center of mass.

lx = (0.00, 0.00, 1.00)	Px = 520.48
ly = (0.00, -1.00, 0.00)	Py = 2624.17
lz = (1.00, 0.00, 0.00)	Pz = 2624.17

Moments of inertia: (grams * square millimeters)

Taken at the center of mass and aligned with the output coordinate system

Lxx = 2624.17	Lxy = 0.00	Lxz = 0.00
Lyx = 0.00	Lyy = 2624.17	Lyz = 0.00
Lzx = 0.00	Lzy = 0.00	Lzz = 520.48


Moments of inertia: (grams * square millimeters)

Taken at the output coordinate system. (Using positive tensor notation.)


lxx = 16081.30	lxy = 0.00	lxz = 0.00
lyx = 0.00	lyy = 16081.30	lyz = 0.00

4 Plots to explain the Simulation parameters -


- Different rpm levels in response to the PWM input

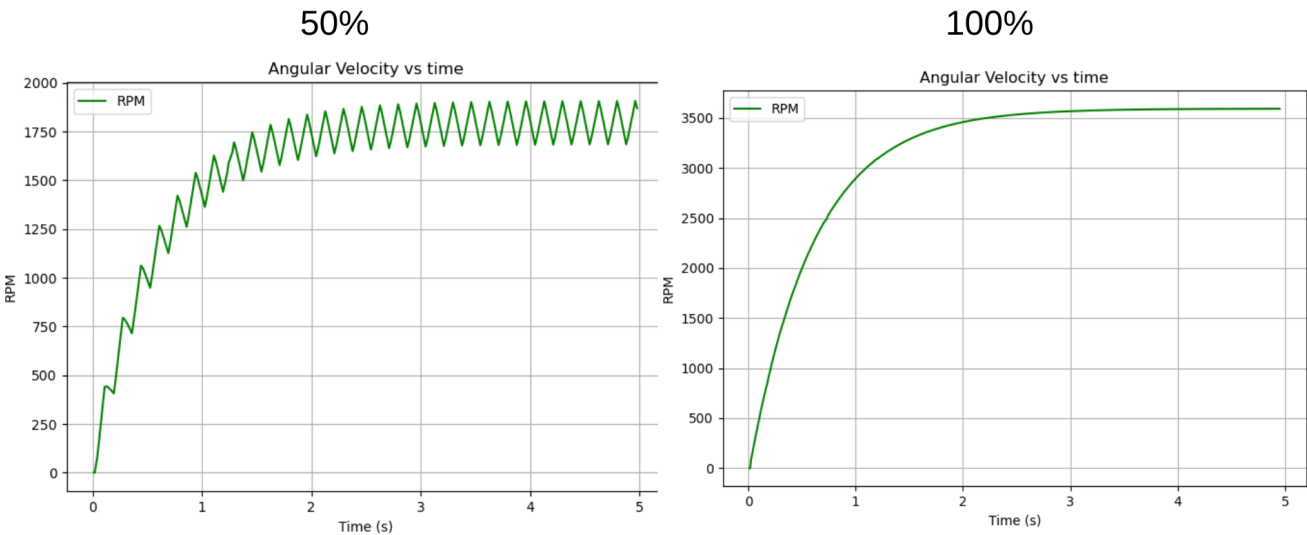


- Constant load torque application (Duty Cycle = 100%)

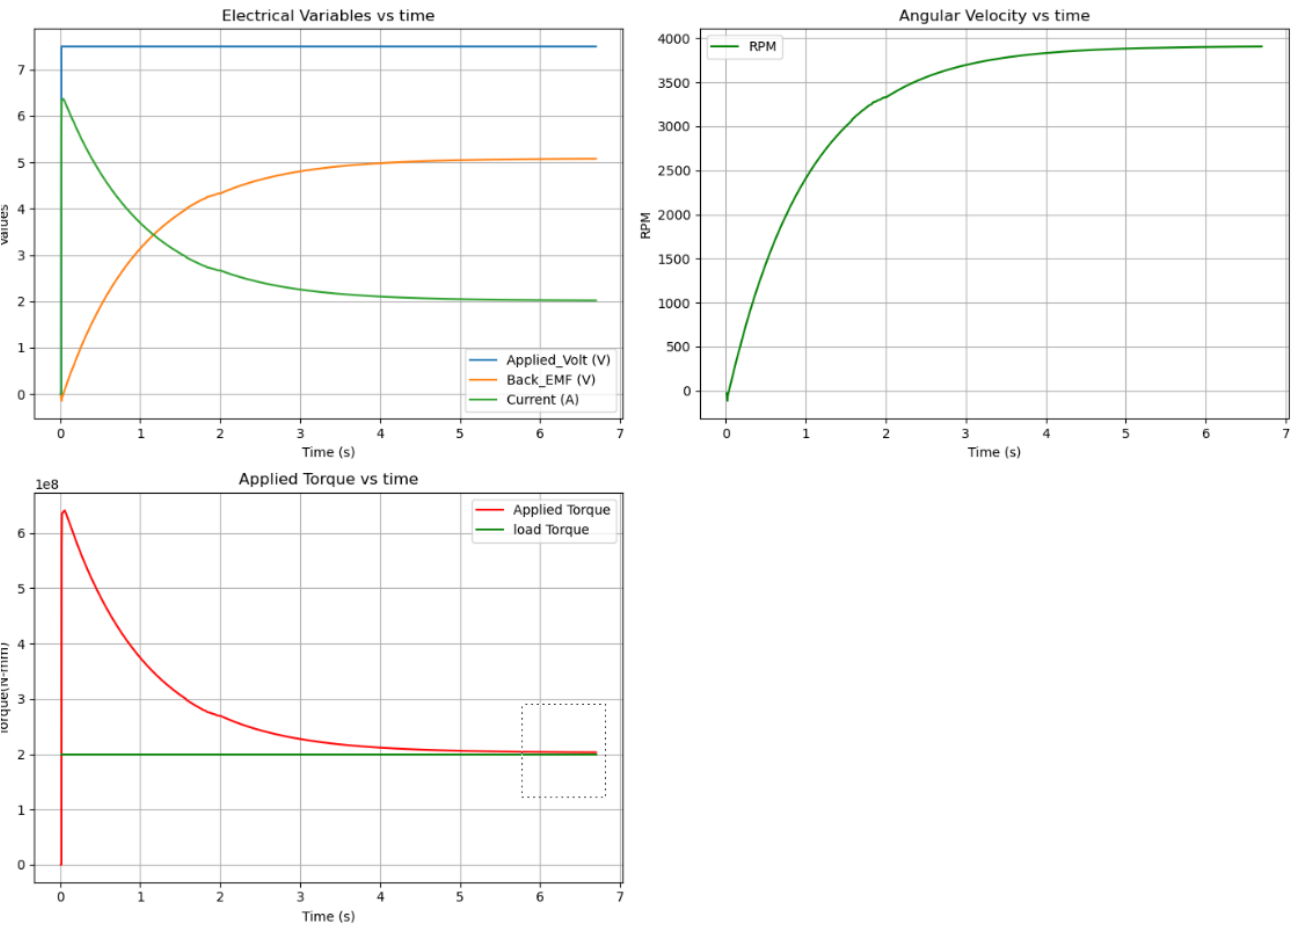


- Sinusoidal load torque application

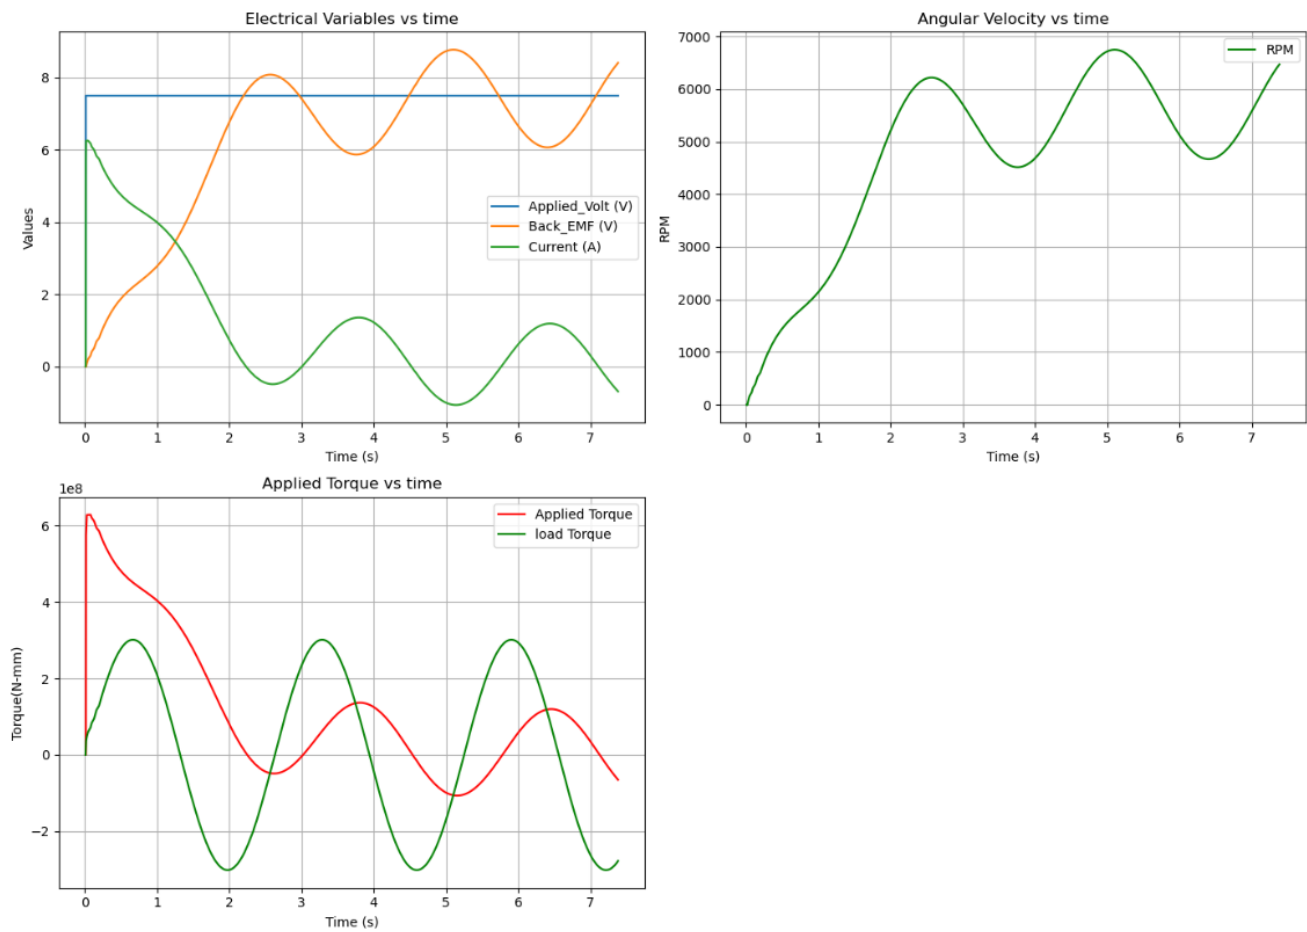


- The contribution of the K_t (Nm/A)

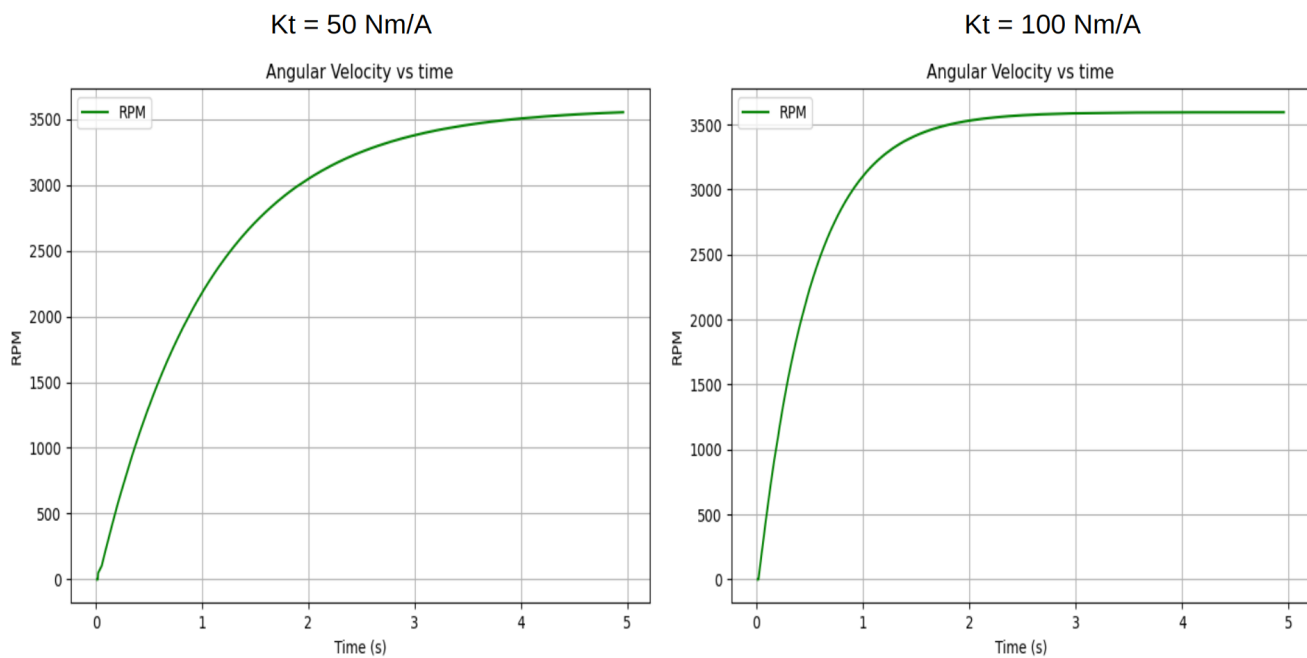

- The effect of the K_v (rpm/V)


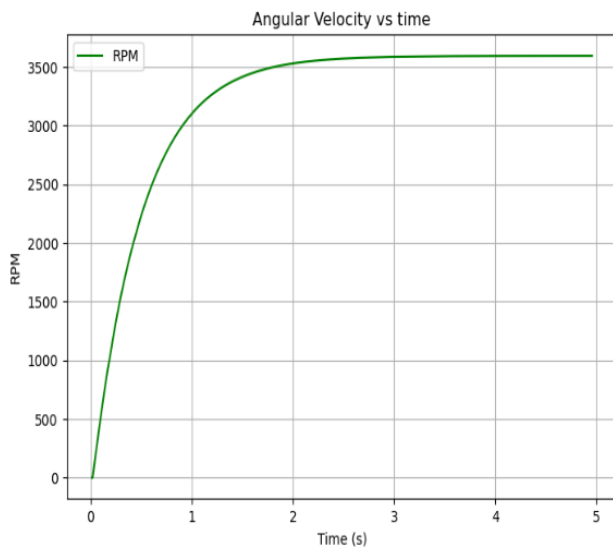


$k_v = 500$ rpm/V

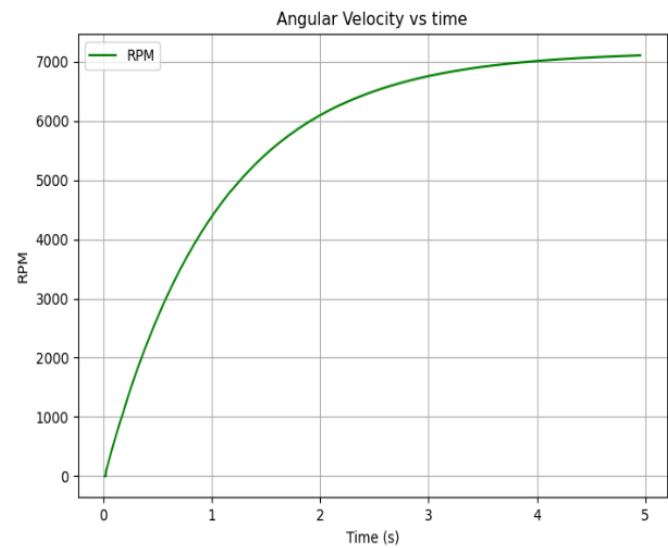

$k_v = 1000$ rpm/V

- Effect of SolverFrequency and SamplingTimestep on the PWM curve precision

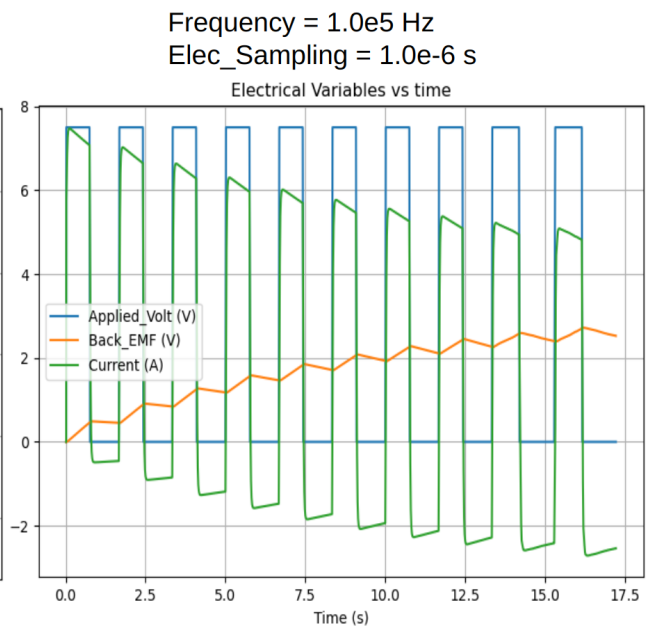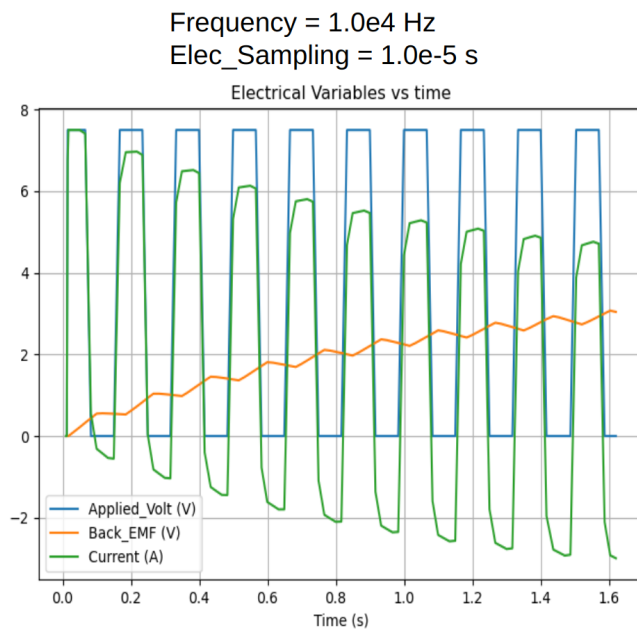

5 Validation study results

- **Simulation Methodology (Dyso Simulation):**

Experimental data was exported into .csv file which was channeled to the chrono model. Real time from the data was synchronized with the simulation timeStep to use the PWM Duty Cycle and the Load Torque as a input.

All the crucial simulation Parameters used -

$$K_t = 0.005 \text{ Nm/A} \quad (1)$$

$$K_v = 1900 \text{ rpm/V} \quad (2)$$

$$Resistance = 0.040 \Omega \quad (3)$$


$$Inductance = 10 \times 10^{-5} \text{ H} \quad (4)$$

$$PwmFrequency = 1 \text{ kHz} \quad (5)$$

$$MechanicalFrequency = 10^5 \text{ Hz} \quad (6)$$

$$ElectricalFrequency = 10^5 \text{ Hz} \quad (7)$$

$$ElectronicSamplingFrequency = 0.005 \text{ Nm/A} \quad (8)$$

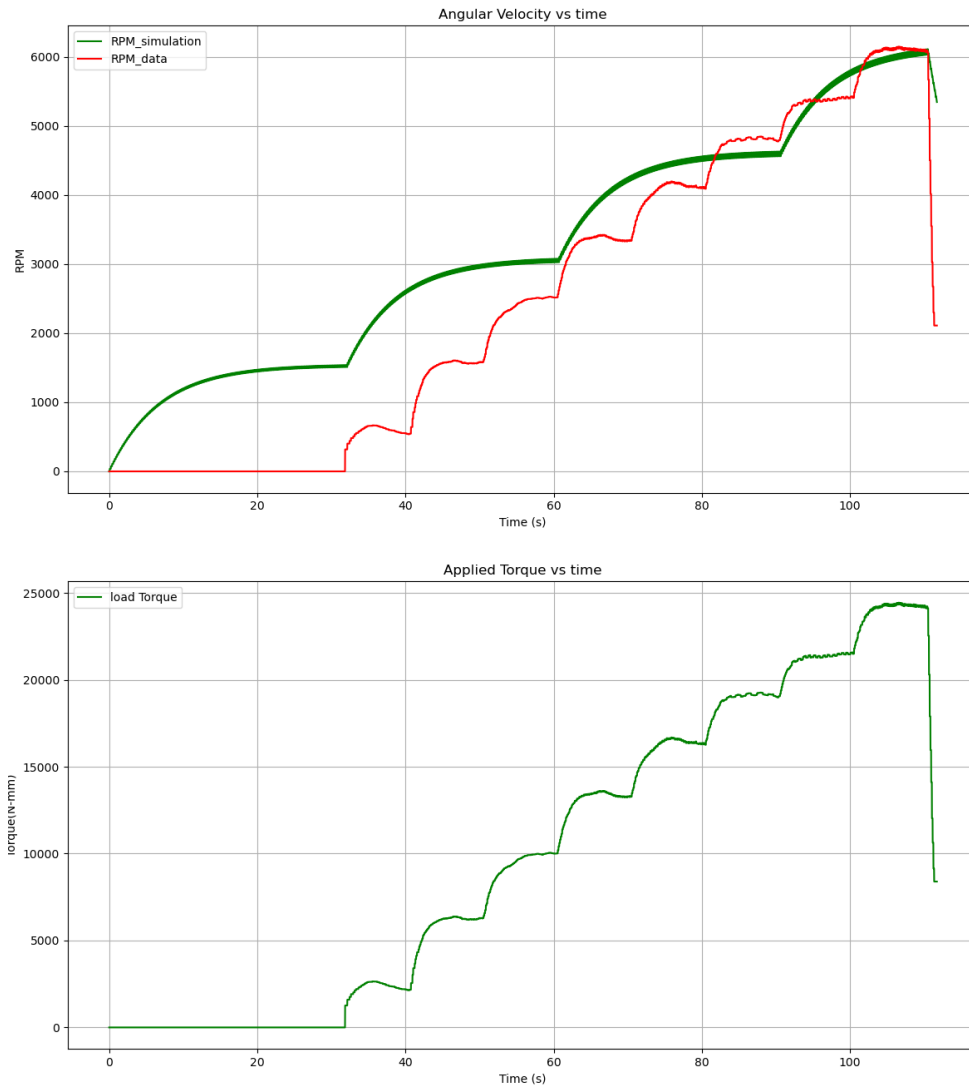

Observations-

As we can see the simulation can approximate the Dyno test data almost accurately with some errors. The error can be substantially decreased with further fine tuning of the frequencies, sampling time and the electrical motor specifications.

- **No load:**
- Key comparisons include:
- Motor speed (rpm) at 50
- Impact of varying K_t and K_v
- Torque response under different loading conditions

Plots were generated to compare experimental results with simulation outputs. These plots highlight the sim2real gap and show that simulation accuracy is sensitive to motor constants and load profiles. An analytical estimate of error is currently under development, focusing on RMS differences and time-aligned errors over the testing duration.

6 Conclusions and future Work

To be added at the end.