

ACB-kædemotor - frit konfigurerbar - CDC-1-ACB **24 V DC / Tilpasset efter kundeønsker**

Elektrisk motor til integreret, usynlig montering i vinduesprofilen og til eftermontering.
Praktisk til motoriseret åbning og lukning af vinduer og lemme.
Kan bruges til Komfortopluk, røgudluftning og brandventilation iht. DS/EN12101-2
Kan kombineres med alle D+H låsemotorer.

Egenskaber:

Integreret, frit parameterbar slukningselektronik for at forhindre en defekt i tilfælde af overbelastning af vindue og motor.
Integreret grænseflade ACB (Advanced Communication Bus) med åben Modbus RTU-protokol.
Direkte integration af motoren gennem åben buskommunikation via ACB (Advanced Communication Bus), f.eks. i CTS (bygningautomation).
Lav driftsstøj takket være innovativ, akustisk afkobling af drevkomponenterne.
Højpræcisionsmotor og synkron elektronik til synkron drift af op til 8 motorer.
Korrosionsbeskyttet, hærdet, stålkæde, vedligeholdelsesfri takket være livstidssmøring.
Highspeed-funktion (-HS) til hurtigt opluk af vinduer i tilfælde af brand (ABV).
Justerbart, flertrins klembeskyttelsessystem (løbetid, kraft, åbning).
Automatisk aflastning af tætningsbåndet efter lukning beskytter tætningslister.
Lavt kabelforbrug med mulighed for gennemsløjfning af op til 3 motorer.
Enkel installation takket være stik med beskyttelse mod omvendt polaritet.
Tilslutning valgfrit mulig fra venstre eller højre (forsyning inkl. bussignaler).
Kan parametriseres individuelt via D+H SCS-software.

Funktionsbeskrivelse ACB

Sikker ABV-central kommunikation gennem krypteret dataoverførsel mellem centraler og motorer fra D+H Mechatronic AG.
Direkte styring af motoren via ACB mulig.
Som standard er motoren indstillet med drift med pol-skift fra fabrikken.
Præcis styring af position og feedback, herunder angivelser af den faktiske position.
Åbne- og lukke meddelelser kommer direkte fra motoren via ACB-kommunikation.
Motorens generelle status, som f.eks. samlet kørestrækning, antal aktiveringer, diagnostik og nødfunktion, kan evalueres.

–

Udvidelsesfunktioner:

Option "SBD/SBU" - Korrosionsbeskyttet, hærdet stålkæde i sidebue-design til lave karmhøjder
Option "ZB" - Vindebroanvendelse til sidemontering af motoren på vinduet
Option "CP" - Brugertilpasset motorfunktionsprogrammering såsom løbetid, kraft og åbning
Option "HP" - Åbningsprogrammering
Option "VP" - Signal til forbindelse med D+H BSY+ låsemotorer
Option "KM" - Kraftig motor-gear-enhed med øget kraft (op til 400 N) til at åbne og lukke tunge parallelsprossede og hæve-/sænkevindue/tophængte vinduer.
Option "LS" - Lavhastigheds-programmering i LUKKET-retning til 5 mm/s
Option "SA" - "Afbryder ÅBEN" endepositionsmeddelelse
Option "SZ" - "Afbryder LUKKET" endepositionsmeddelelse
Option "SA-SZ" - "Afbryder ÅBEN" og "Afbryder LUKKET" endepositionsmeddelelse
Option "AS2" - Akustisk signal i overensstemmelse med beskyttelsesklasse 2 i henhold til MaschRL/42/EG
Option "AS3" - Akustisk signal i overensstemmelse med beskyttelsesklasse 3 i henhold til MaschRL/42/EG
Option "SKS" - Mulighed for direkte tilslutning af en klembeskyttelsesliste eller en optisk sensor til

overvågning af lukkekanten på motoren

Option "specialfarve" - lakering til perfekt integration i facadens udseende i henhold til RAL, DB, NCS

Tekniske data:

Forsyning: 24 V DC / ± 15 %

Strømforbrug:

0,6 A (til 350 mm åbning)

0,8 A (til 500 + 600 mm åbning)

1 A (til 700 mm åbning)

1 A (til 800 - 1300 mm åbning)

Indkoblingstid: 30 % (TIL: 3 Min. / FRA: 7 Min.)

Udkobling: Integreret elektronisk belastningsafbryder

Konfiguration: Main eller Sub

Design: Højre eller venstre

Trykkraft: 250 N

Trækkraft: 250 N

Nominel låsekraft **: 1500 N

Levetid: 20000 dobbeltoperationer *

Åbning: 300 mm - 1300 mm

Hastighed ÅBNE: 6,7 mm/s

Hastighed ÅBNE - ABV:

9,4 mm/s (til 350 mm åbning)

13,6 mm/s (til 500 + 700 mm åbning)

15 mm/s (til 800 - 1300 mm åbning)

Hastighed LUKKE:

5 mm/s (til 350 mm åbning)

6,7 mm/s (til 500 + 700 mm åbning)

6,7 mm/s (til 800 - 1300 mm åbning)

Beskyttelsesklasse: IP 32

Måling af lydtryk (støjemission): $L_p A \leq 35$ dB(A)

Temperaturområde: -15 °C (-5 °C ***) ... $+75$ °C

Temperaturstandsikkerhed: B300 (30 min / 300 °C)

Hus: Aluminium

Farve: Specialfarve i henhold til RAL/DB/NCS

Tilslutning: Silikonekabel

B x H x D: 405-885 (åbningsafhængig) x 30 x 39 mm

* Ved lodret anvendelse skal D+H-forhandleren kontaktes!

** Afhængig af fastgørelsen, *** iht. VdS 2580

Leverance:

Motor, silikoneforbindelseskabel med systemstik, brugsanvisning

Brand: D+H

Type: CDC-1-ACB

Art.nr.: 26.100.00

Mængde: stk Pris: DKK Total: DKK

Gør din lokale D+H-partner tilgængelig for designvarianter.

<https://www.dh-partner.com/dk/da/service/projekterings-hjaelp>

Vigtige noter:

Denne produktbeskrivelse udgør ikke et udbud. Ansvar for overensstemmelse med udbudsretlige krav påhviler den udbudsgivende projektant eller arkitekt.

Montering og ibrugtagning skal ske i henhold til producentens anvisninger.

Med forbehold for tekniske ændringer.

Insurance Data Transfer Guide

**~~Model User Guide Requirements for the
transmission of insurance policy data to support the
verification of mandatory auto insurance.~~**

~~Version 1.2~~

~~January 3, 2017~~



Insurance Industry Committee on Motor Vehicle Administration



Table of Contents

Section One.....	1
Introduction to the Model User Guide Requirements for transmitting insurance policy data.....	1
Section Two.....	2 Data File
Transfer Guidelines.....	2 Data Transfer
Process.....	2 Submission of Data
Files.....	3 State's System — Receipt of
Insurance Data Files.....	3 State's System — File Format
Validation.....	3 State's System — File Process
.....	3 State Jurisdiction — Insurance
Verification Process.....	4
Data File Format	4
Detail Record.....	4
Trailer Record.....	5

Insurance Industry Committee on Motor Vehicle Administration

Section One

Introduction to the Model User Guide Requirements for transmitting insurance policy data

The IICMVA supports the use of the IICMVA Online Insurance Verification Model using web services technology and does not consider a data transfer process (often referred to as a Book of Business data transfer) to be part of the Online Insurance Verification Model.

However, the IICMVA also recognizes that a jurisdiction may want a one-time data file transfer to establish a current insurance company of record to associate with their registered vehicles. This process is intended for the express purpose of facilitating a jurisdiction's ability to send an online insurance verification query.

If a jurisdiction determines there is a need for insurance companies to provide additional insurance information, the IICMVA has established this guide which defines a standardized methodology and data file format for the consistent submission, implementation and use of the provided supplemental data.



Insurance Industry Committee on Motor Vehicle Administration

Section Two

Data File Transfer Guidelines

Data Transfer Process

This section provides guidance for supporting the online insurance verification model. If a state implements the following process, IICMVA recommends a one-time data transfer.

This process eliminates the need for the industry to resolve unmatched vehicle records.

Prior to electing to implement this process, full consideration of the following inherent limitations of “point-in-time” data files should be evaluated:

Data elements often do not match

Collection of data, such as policy numbers, VINs, and customer information by separate entities may result in mismatched data. Consequently, data transfer files may not match all registered vehicles.

Participation by commercial insurers may not be possible

The need to collect and process vehicle data elements varies among commercial insurers. Since some commercial insurers do not maintain specific vehicle data, they would not be able to provide this information and a secondary method may need to be implemented.


Data may be restricted to jurisdictional boundaries

Auto liability policies are commonly written in the state the vehicle is garaged. The state where the policy is written could differ from the state in which the vehicle is registered. Consequently, insurance companies may not be able to identify the correct state of registration for each insured vehicle. This may result in submission of data files that do not contain all vehicles that are registered in the policy state and conversely, may contain vehicles that are not registered in the policy state.

Data provided is only valid at the time the file is created

Policy changes and transfers between companies occur frequently and will result in some portion of the data provided to become obsolete after a data file is created. As a result, the current insurer of record of some registered vehicles may be misidentified.

The following process flow diagram has been provided to illustrate the electronic data transfer process:

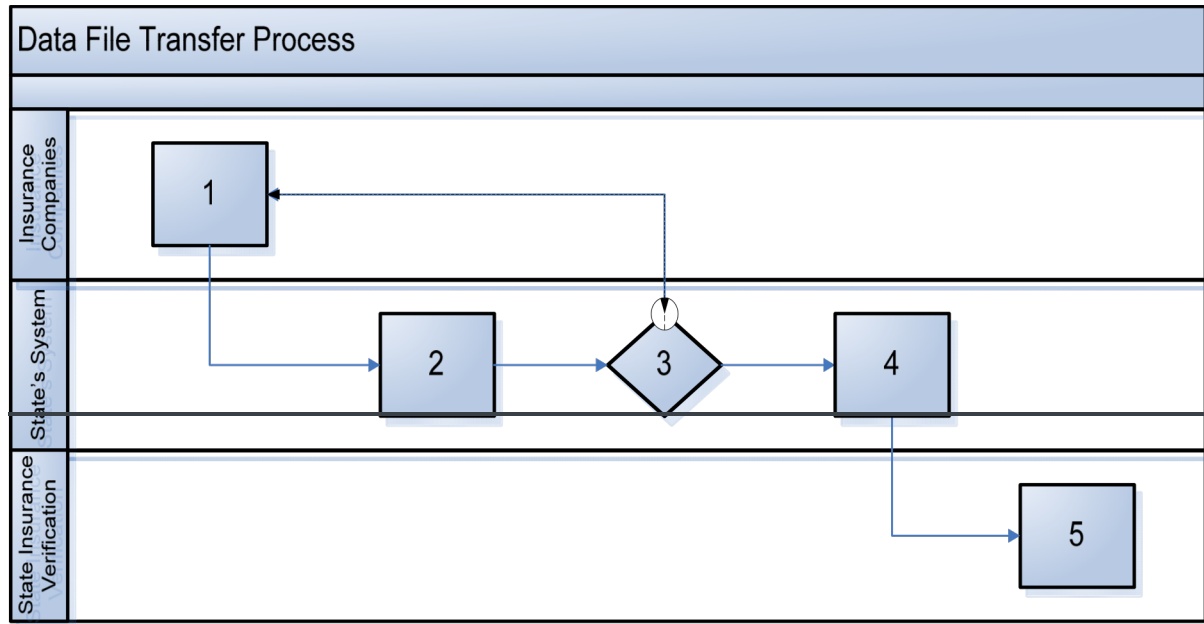

1 - Submission of Data Files

Each insurer will send a data file via agreed upon electronic method of transmission. File Transfer Protocol (FTP) with Pretty Good Privacy (PGP) compatible encryption is the recommended method for submitting data to the state's designated Internet Protocol (IP) address.

~~2 - State's System - Receipt of Insurance Data Files~~

~~The state's application will verify that each company has sent an insurance data file. If a file has not been received from a specific insurance company, the company's designated contacts should be notified immediately via e-mail or other agreed upon electronic notification method.~~

~~3 - State's System - File Format Validation~~

~~Upon receiving data files, the state or its designated vendor will validate the file format to ensure that it adheres to the standard as outlined in this document.~~

~~Files that fail to meet the set standard will be rejected by the state's system. The rejection can be conveyed in the form of an e-mail or automated electronic notification to the respective company's designated contact. An option for insurance companies to receive a notification of the file's acceptance will also be available. The impacted insurance company will then have an opportunity to correct and resubmit the data files.~~

~~4 - State's System - File Process~~

~~The state's system will incorporate a process to identify the current insurer of record.~~

~~Note: The return of individual records to the submitting insurance company for further processing is not within the scope of this process.~~

5—State Jurisdiction—Insurance Verification Process

The state, upon receiving notification of vehicles from the file processing system, has the option to request proof of insurance coverage directly from the registrants of those vehicles. If the state so chooses, the information provided by the vehicle registrants can be used to verify coverage directly with the insurance company by using the IICMVA Online Insurance Verification Model web service.

Data File Format

The data in each record shall always be recorded in fixed length fields using the 7-bit American Standard Code for Information Interchange (ASCII).

The field name “Mandatory/Optional” is used to identify data which is required (Mandatory) or optionally (Optional) provided by the entity transmitting the file. “Optional” data fields will be transmitted at the discretion of the insurance company based upon the submitting company’s independent business rules.

Transmission methods and security processes allow for the identification of sender and receiver of data which eliminates the need for a header record. The trailer record was included to allow the receiver to validate all data sent was received.

Each record shall consist of a record size of 300 bytes and adhere to the following structures:

Detail Record

Field Name	Length	Begin	End	Type	Mandatory /Optional	Description
POLICY TYPE	2	1	2	AN	M	‘VS’ – Vehicle Specific ‘NS’ – Non Vehicle Specific
NAIG	5	3	7	N	M	NAIG Code
POLICY NUMBER	30	8	37	AN	M	Policy Number
EFFECTIVE DATE	8	38	45	N	M	Effective Date—YYYYMMDD format
VIN	25	46	70	AN	Ø	VIN (optional for non-vehicle specific policy)
LAST NAME or ORGANIZATION	40	71	110	AN	Ø	
PREFIX——NAME ABBR	3	111	113	AN	Ø	
MIDDLE NAME	20	114	133	AN	Ø	
FIRST NAME	40	134	173	AN	Ø	
SUFFIX NAME	3	174	176	AN	Ø	Abbreviated Name Suffix (JR, SR, etc)
FEIN	9	177	185	AN	Ø	
ADDRESS	50	186	235	AN	Ø	
CITY	35	236	270	AN	Ø	
STATE	2	271	272	AN	Ø	
ZIP	5	273	277	N	Ø	

COMMERCIAL POLICY INDICATOR	4	278	278	AN	0	Y for Commercial Policy
FILLER	23	278	300	AN	M	Space Filled

Trailer Record

Field Name	Length	Begin	End	Type	Mandatory /Optional	Description
TYPE	2	1	2	AN	M	'TR' – Trailer
RECORD COUNT	12	3	14	N	M	Record count not including Trailer Record
PROCESS DATE	8	15	22	N	M	Date the file was created – YYYYMMDD Format
FILLER	278	23	300	AN	M	Space Filled

