



1. MATERIAL: **ALUMINUM, 6061-T651**
2. SPECIAL FINISH: **ANODIZE PER MIL-A-8625F, TYPE II, CLASS 2 (BLACK)**
3. SURFACE ROUGHNESS (UNLESS SPECIFIED OTHERWISE): **63 Ra** (AVERAGE MICRO-INCHES)
4. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994
5. DEBURR AND BREAK ALL SHARP EDGES, MAX 0.010" (UNLESS SPECIFIED OTHERWISE)
6. PARTS ARE TO BE CLEAN AND FREE OF OIL, GREASE, AND OTHER CONTAMINANTS
7. DIMENSIONS INCLUDE ANODIZING, ELECTROPLATING, AND CHEMICALLY APPLIED FINISHES IF APPLICABLE


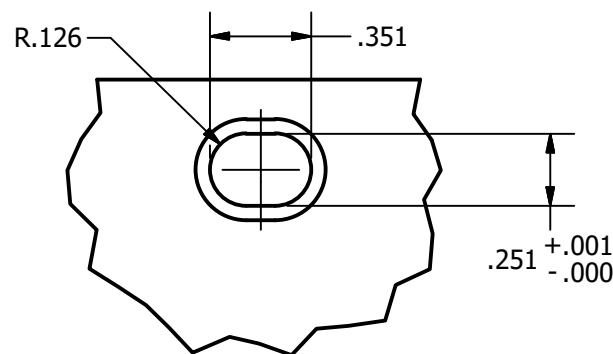


DETAIL A



CHAMFER .05 X 45° —

SECTION B-B

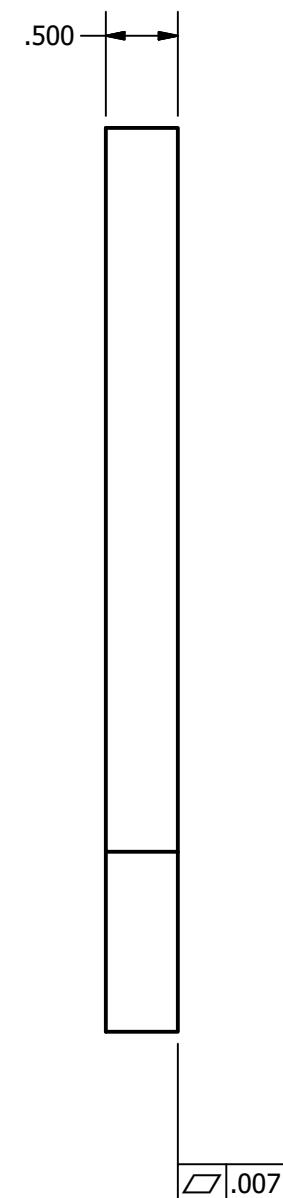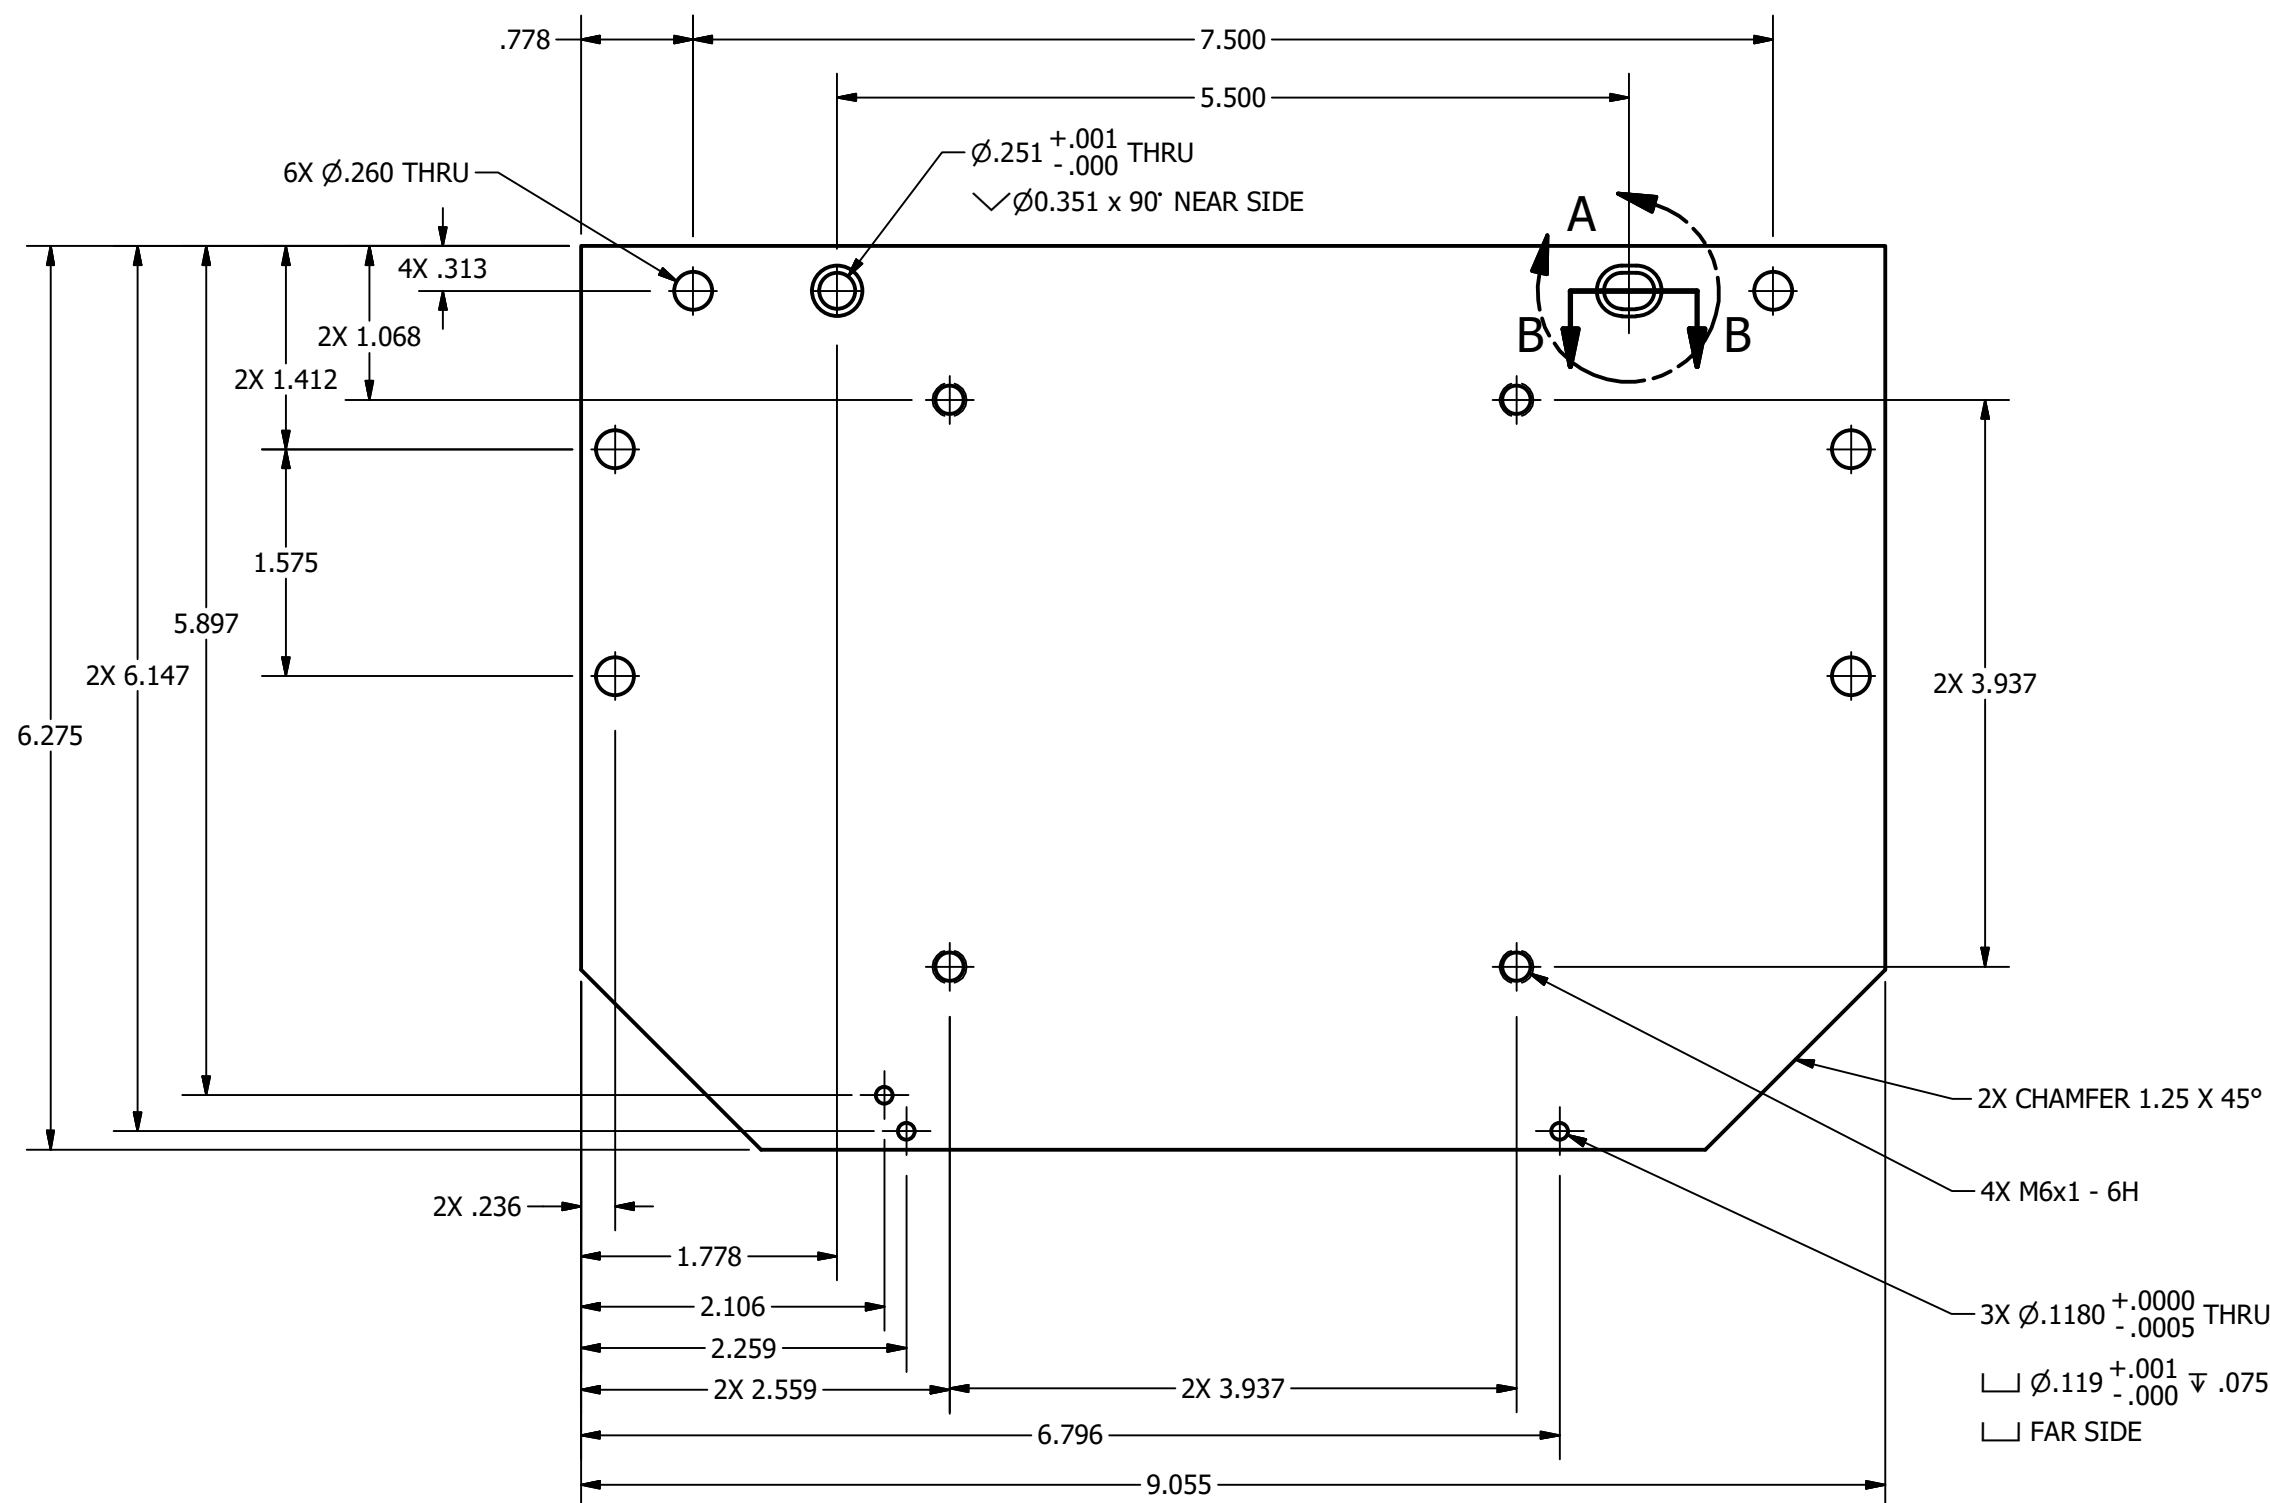

(UNLESS SPECIFIED OTHERWISE)	
PRIMARY UNITS: INCHES	
[SECONDARY UNITS]: MILLIMETERS	
PRIMARY TOLERANCES:	
X.X	± 0.020
X.XX	± 0.010
X.XXX	± 0.005
X.XXXX	± 0.0005
ANGULAR	± 0.5 DEG
- DO NOT SCALE DRAWING -	
THIRD ANGLE PROJECTION:	

 Howard Hughes Medical Institute		 	
BBP G STAGE MTG PLATE .ipt			
SIZE C	PART NUMBER J008086	REV -	SHEET 1 OF 1