

Europe: +49 / 7731 8399 0 | Email: info@standexmeder.com
USA: +1 / 508 295 0771 | Email: salesusa@standexmeder.com
Asia: +852 / 2955 1682 | Email: salesasia@standexmeder.com


Item No.:
8205179384
Item:
MRE05-1A79-BV384

Dimensions mm[inch]
tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m

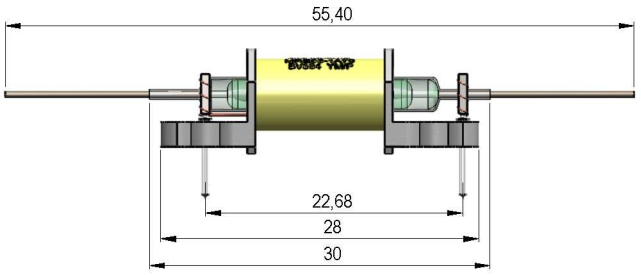




Isometric
Scale 1:1
Maßstab 1:1



Layout
Top view
Draufsicht



Marking
according to EN60062/factory code
gem. EN60062/Fertigungsstätte



Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		225	250	275	Ohm
Coil voltage			5		VDC
Rated power			100		mW
Thermal resistance			95		K/W
Pull-In voltage				3,5	VDC
Drop-Out voltage		0,5			VDC

Contact data 79	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			25	W
Switching voltage	DC or Peak AC			1.000	V
Switching current	DC or Peak AC			1	A
Carry current	DC or Peak AC			2	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Contact resistance dynamic	Maximum value 1,5 ms after excitation Start Value			200	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	100			TOhm
Breakdown voltage (>25 AT)	according to EN 60255-5	2.500			VDC
Operate time incl. bounce	measured with 40% overdrive			1	ms
Release time	measured with no coil excitation			0,4	ms
Capacity	@ 10 kHz across open switch		0,4		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Number of contacts		1			
Contact - form		A - NO			
Dielectric Strength Coil/Contact	according to EN 60255-5	1,8			kV AC
Insulation resistance Coil/Contact	RH <45%, 200 VDC Measuring Voltage	100			TOhm
Mounting or coil material		Noryl 110			
Connection pins		Copper alloy tin plated			

Modifications in the sense of technical progress are reserved

Designed at: 10.11.15 Designed by: WKOVACS Approval at: 13.01.16 Approval by: DSTASTNY
Last Change at: 15.01.16 Last Change by: WKOVACS Approval at: 18.01.16 Approval by: DSTASTNY **Version:** 03

Europe: +49 / 7731 8399 0 | Email: info@standexmeder.com
USA: +1 / 508 295 0771 | Email: salesusa@standexmeder.com
Asia: +852 / 2955 1682 | Email: salesasia@standexmeder.com

Item No.:
8205179384
Item:
MRE05-1A79-BV384

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine, duration 11ms, in 3 axis			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-20		70	°C
Storage temperature		-35		95	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C

General data	Conditions	Min	Typ	Max	Unit
BV - Specifics 1.		Relay with extremely high insulation resistance			
BV - Specifics 2.		Relay with electrostatic shield			
BV - Specifics 3.		Switch insulation: PTFE Shrinking Sleeve			