


## NOTES:

RATED @ 1.50 AMP  
MOTOR PINOUT: SEE WIRING DIAGRAM

- 1 - 0.05[0.002] MAX AXIAL MOVEMENT @ 35-45 LBS  
2 - LIN STANDARD LABEL LOCATION  
& ORIENTATION PER DOC # 6051-00001  
3 - SHIP CABLE 4634140225990 WITH MOTOR

## WIRING DIAGRAM



## MOLEX 87439-0400 PINOUT

PIN #	COLOR	PHASE
1	BLUE	D
2	RED	B
3	GREEN	C
4	BLACK	A

PRELIMINARY





Version

4

By phuctran at 11:50 am, Mar 29, 2024

## REVISION HISTORY

ECN	REV	DATE	DESCRIPTION	INIT.
62934	A0	3/12/2024	ORIGINAL	PT

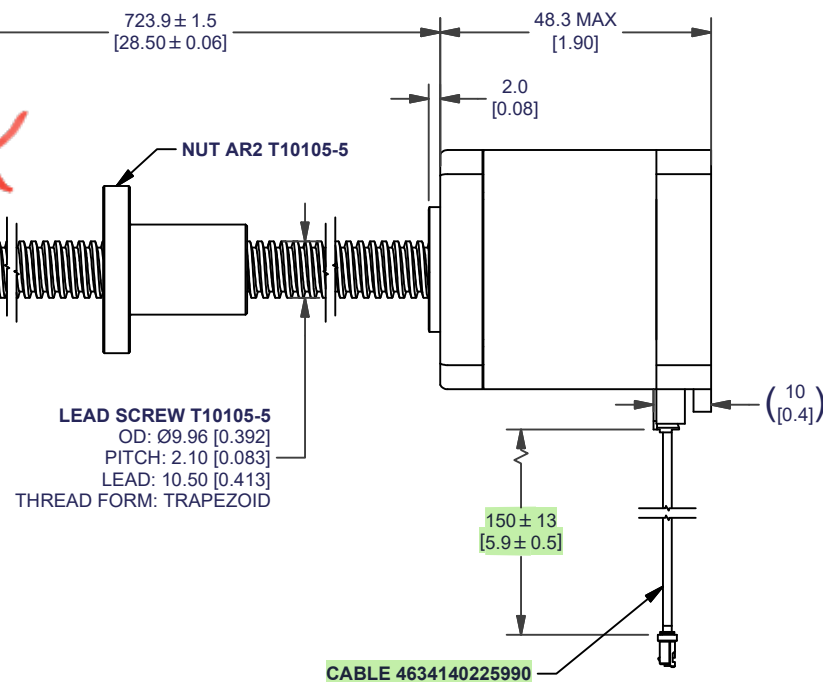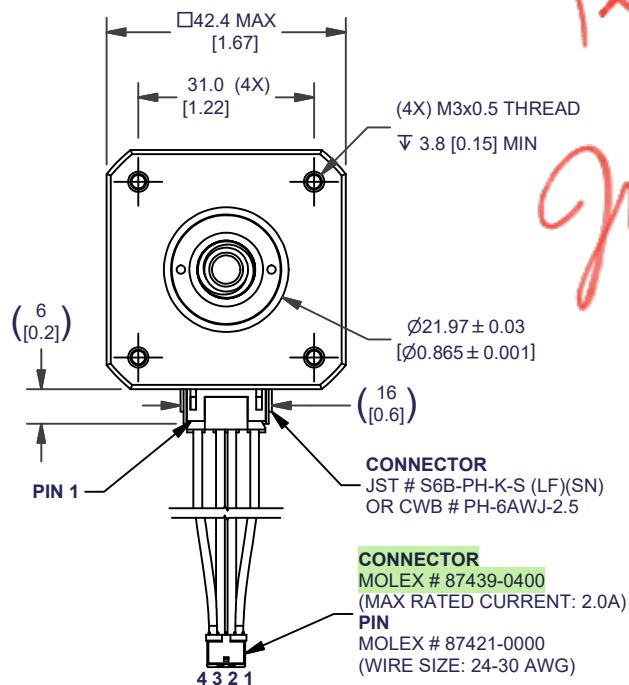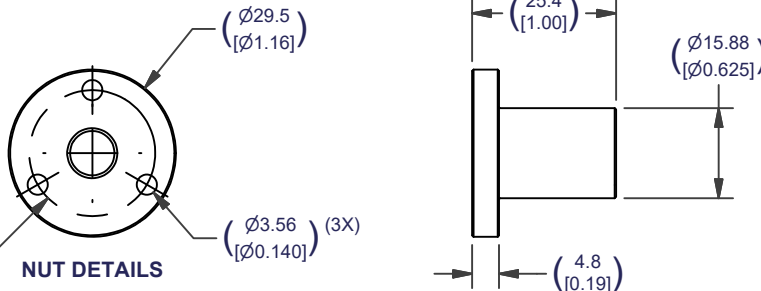

UNLESS OTHERWISE STATED;  
ALL MATERIALS ARE ROHS COMPLIANT  
C.O.C. REQUIRED FOR EACH SHIPMENT

The information herein is the property of Lin Engineering.  
No portion of this data shall be released, disclosed, used, or  
duplicated for any purposes without the  
written consent of Lin Engineering.



OR WITH GD&T SYMBOL ARE CRITICAL TO DESIGN.

Unless Otherwise Specified Dimensions Are In:  
Millimeter [inch]  
Tolerances Are:  
Angles ±0.5°  
Chamfer ±5°  
Deburr All Edges 0.13mm [0.005"] MAX

Millimeters	Inches
.xx ± 0.25	.xx ± 0.010
.xx ± 0.13	.xx ± 0.005
.xxx ± 0.013	.xxx ± 0.0005


## APPROVALS

DESIGNED BY:  
phuctran

## DATE

3/12/2024

CHECKED &amp; APPROVED BY:

THIRD ANGLE  
PROJECTION

TYPE 1.8°

TITLE MOTOR OUTLINE

MODEL NUMBER

LE-4118-048-02-02

MATERIAL

SEE B.O.M.

DRAWING NO.

4611112303731

SIZE A

SCALE 3 : 4

DO NOT SCALE DRAWING

SHEET

1 OF 1