


NOSILNE PLOČEVINE

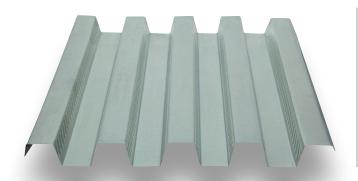

DEBELINA PLOČEVINE: 0,6 mm-(0,8 mm*)-1,25 mm POKRIVNA ŠIRINA PANELA: 600 mm* ali 750 mm

MAX. DOLŽINA: na povpraševanje MAX. DOLŽINA NA ZALOGI: 12.000 mm

VIŠINA PROFILA: 55 mm NANOS CINKA: 140 g/m²

* na zalogi

ZNAČILNOSTI RAZDELKA


		DEBELINA (mm)									
		0,6	0,7	0,8*	1,0	1,25					
Teža (kg/m²)		7,8	9,1	10,5	13,1	16,3					
J	(cm ⁴ /m)	38,8	47,2	55,8	73,7	96,3					
W	(cm ³ /m)	11,3	13,9	16,8	23	31,3					

DOVOLJENO ODSTOPANJE


	. 10 d- 2 000							
	+10 mm do 3,000 mm							
Dolžina	+20 mm preko 3,000 mm							
	-5 mm za vse dolžine							
5 1 V								
Delovna širina	± 5 mm							
Odstopanje zaradi								
pravokotnosti reza	S ≤ 0,5% delovne širine							
pravokou iosti reza								

55/150/600

* na zalogi 0,8 mm



55/150/750



ENAKOMERNO PORAZDELJENE MAKSIMALNE OBREMENITVE kg/m² 55/150/600															
DEDELINA (mm)		RAZPON (m)													
DEBELINA (mm)	1,00 1,25 1,5	0 1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	3,75	4,00	4,25	4,50	4,75	5,00
0,8	2142 1367 94	693	528	385 415	278 334	206 275	157 229	121 194	95 166	75 143	60 124	49 109	39 96	32 85	26 76
A A A 0,8	2680 1711 118	5 868	662	521	420	346 351	268 289	208 245	165 210	132 181	107 158	88 139	72 123	60 109	50 98

Rdeče vrednosti ne upoštevajo deformacijskih mej. Ostale vrednosti maksimalnih obremenitev najdete na www.metrapan.si.






legenda na www.metrapan.si






85/280/1120

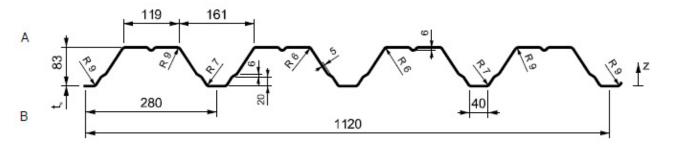


V debelini: 0,75/0,88/1/1,25/1,50 mm

135/310/930

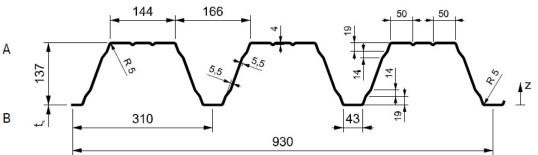

V debelini: 0,75/0,88/1/1,25/1,50 mm

150/280/840

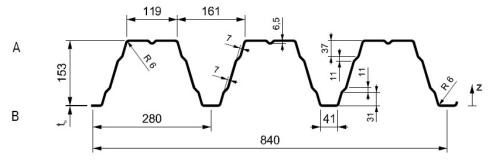

V debelini: 0,75/0,88/1/1,25/1,50 mm

Vrednosti maksimalnih obremenitev za prikazane nosilne pločevine najdete na www.metrapan.si.

