A PUBLIC-DATA INVESTIGATION TOOL

Which building fits your plan?

Find the next fact that could change your choice.

GEONOS connects NYC building identities, tax lots, environmental context and reported energy. You state the conditions; the app shows what supports them, what conflicts and what still needs evidence.

Understand

Start with an address

Get the physical record and the right follow-up questions.

Compare

Keep the same question

See candidate outlines at a common physical scale and evaluate explicit conditions.

Find

Search the public records

Explore matching records across all five boroughs, then investigate a shortlist.

Open the owner-private working prototype

ONE COHERENT DECISION WORKFLOW

A condition is more useful than an overall score.

Illustrative question: could 211 Lombardy Street support a proposed operation? These are demonstration requirements, not official standards or a property recommendation.

Explicit condition	What the records establish	State
Mapped footprint at least 20,000 sq ft	The live and preserved outlines exceed 36,000 sq ft. Algorithms differ slightly; both exceed the illustrative threshold.	Supported at footprint scope
At least 500 kW available electrical capacity	No compatible utility or electrical-engineering confirmation is supplied. Annual energy is a different quantity.	Needs evidence
Permission for the proposed use	Zoning and recorded use do not establish all applicable approvals.	Qualified review

THE NEXT QUESTION

What electrical capacity is available for this operation?


A sourced, dated confirmation can resolve that specific condition. Without it, unknown remains unknown. The report is preserved as user-provided evidence, not independently certified by GEONOS.

Building BIN 3338236 / DOITT 348650 and PLUTO lot 3028220001

CITYWIDE SOURCE FOUNDATION

Every source outline has a place in the archive.

The query interface reaches the full official source. Detailed surrounding-ground evidence is delivered in small geographic-ID shards when a place is opened.

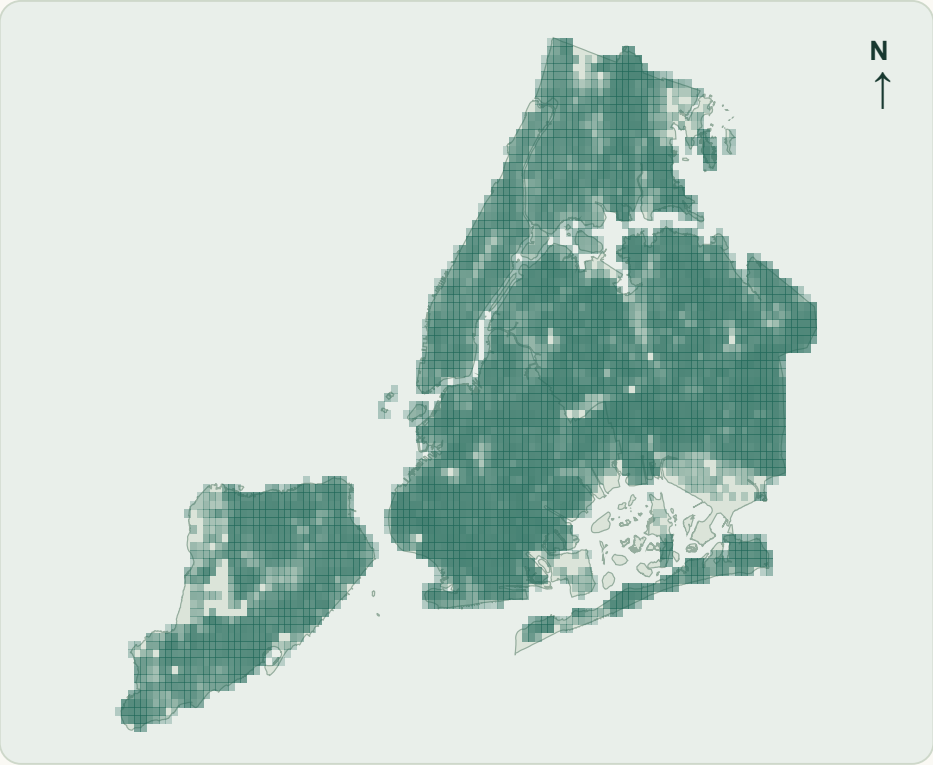

Official footprint counts in 0.005° grid cells. This overview is not a parcel-risk map.

NYC OTI building footprints; NYC DCP PLUTO; preserved acquisition 27 Oct 2026

1,082,964

Official footprint records

1,082,923 computed surrounding-ground records; 41 invalid or placeholder outlines remain unsupported.

858,284

PLUTO tax-lot records

Lot floor area, zoning and building count stay distinct from individual footprints.

28 + 4

Connected + partial / reference layers

The 32-row catalog distinguishes connected evidence from partial or researched inputs. Literature is not counted as acquired data.

REVEAL 1 / REPORTING IDENTITY

Whose energy number is this?

211 Lombardy Street, calendar-year 2024 disclosures. Two native reports repeat the same annual site-energy total while using different reported floor areas.

PARENT / TWO LISTED BUILDINGS

66.7

kBtu/ft²/year · reported site EUI

5,307,042.6 kBtu annual energy

÷ **79,551 ft²** reported floor area

CHILD / BIN 3338236

127.6

kBtu/ft²/year · reported site EUI

5,307,042.6 kBtu annual energy

÷ **41,583 ft²** reported floor area

Same native total. Different reporting boundary. The second child report lists 37,968 ft² but has no reported energy total or EUI. Parent and child totals must not be summed; the repeated value does not prove a meter arrangement, an error or different efficiency.

NEXT CHECK

Request the meter-to-building schedule and the floor-area basis.

Original LL84 reports 2784952 / 66128693 / 66128992

REVEAL 2 / THE MODEL BOUNDARY

Why is the building blank?


DEP models buildings as voids in its surface-water mesh. Inspect the mapped ground around the outline, then verify actual entrances and equipment elevations.

01 / READ THE GROUND AROUND THE BUILDING

A blank interior is not a safety finding.

572 & 592 Smith Street, Brooklyn · 2.13 inches of rain in one hour in both source scenarios

A Current sea level **B 2050 · +30 in**

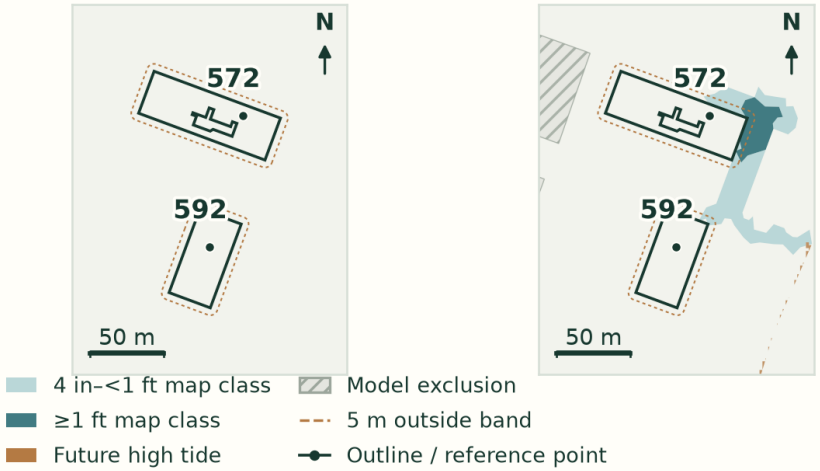

SAME POINT RESULT. DIFFERENT SURROUNDINGS.

Both interior points miss the mapped classes.
DEP excludes buildings from its surface-water mesh.

Mapped ≥1 ft class within 5 m outside each outline

572 Smith	**0 → 145 m²**
592 Smith	**0 → 0 m²**

Current → 2050 scenario · areas rounded to whole m²

Next: inspect entrances, loading, drainage and equipment elevations. These are map areas, not indoor depths, probabilities or a site ranking.

Same extent · EPSG:2263 coordinates converted to meters · Unsimplified clipped polygons; holes preserved. DEP data: July 3, 2024; OTI outlines.
"Current" names a modeled sea-level scenario. Geometry and coverage vintages differ; local changes cannot be attributed solely to sea-level rise.

The map class ≥1 ft touches the 572 Smith outline in the 2050 scenario, while its nearest mapped area is about 47 m from 592 Smith. The same 2.13 in rainfall input is used in both views; sea-level assumptions differ. These are ground-model outputs, not indoor flood depth or annual probability.

NYC Stormwater Resiliency Plan, model methods p. 20; full-source map download

REVEAL 3 / THE OBSERVATION BOUNDARY

Did those extremes happen together?

JFK Airport, 2025. Air temperature and dew point stay attached to the same native observation row and timestamp. Independent maxima are never combined into a synthetic weather condition.

02 / KEEP HEAT AND MOISTURE PAIRED

Hottest air. A different peak in dew point.

JFK Airport · 2025 retained observations · Dry-bulb air temperature and dew point from the same source row

HIGHEST RETAINED AIR TEMPERATURE

38.9°C AIR TEMPERATURE — **21.7°C** DEW POINT


Jun 24, 16:51 UTC · earliest of 2 tied samples

HIGHEST RETAINED DEW POINT

31.1°C AIR TEMPERATURE — **25.6°C** DEW POINT

Jun 23, 11:51 UTC · earliest of 15 tied samples

No retained 2025 pair combines both annual sample maxima.

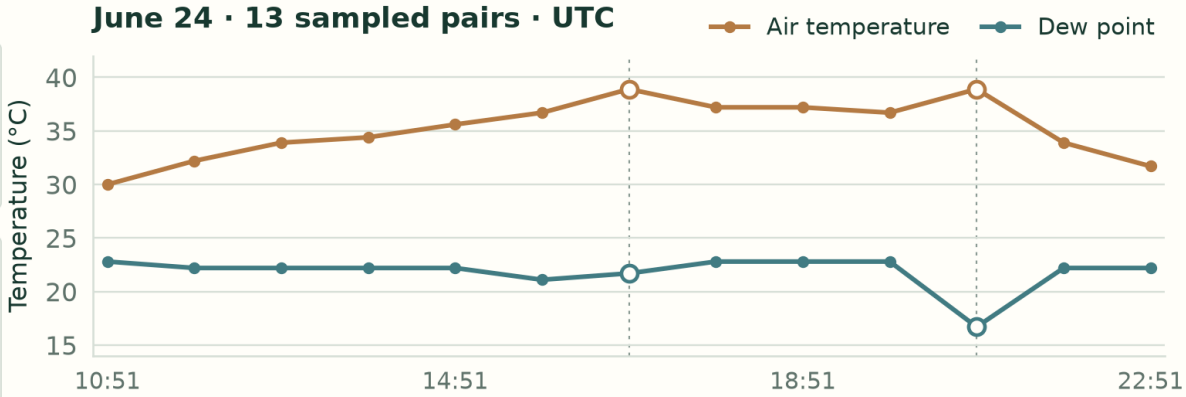

Two 38.9°C samples; dew points of 21.7°C and 16.7°C.

Dots show sampled outdoor moments; connecting lines do not establish continuous conditions, indoor measurements or engineering design loads.

Coverage: 8,617 / 8,760 UTC hour bins (98.37%); 143 unrepresented. Longest gap: 121 bins, Aug 29–Sep 3. Maxima refer only to retained samples.
NOAA GHCNh v1.1.0 · source file retrieved Oct 28, 2026 UTC · Same-row FM15 pairs; documented good source/QC codes; no gap filling.

98.37% coverage: 8,617 retained pairs in 8,760 UTC hour bins. 143 bins are unrepresented; the longest gap is 121 consecutive bins. Missing extremes could change the retained maxima. The five-year airport supplement is neither an indoor measurement nor engineering design weather.

NOAA GHCNh JFK 2025 original station-year file

OBSERVED HISTORY / PUBLISHED FUTURES

Climate changes the question to investigate.

Keep the original spatial support and baseline. A regional projection cannot distinguish two nearby buildings without separate asset-response evidence.

Published horizon	Mean warming / pooled 25th-75th	Days/year at least 90°F
2030s	+1.50 to +2.17°C	27 to 46
2050s	+2.22 to +3.33°C	38 to 62
2080s	+3.11 to +5.44°C	46 to 85

NPCC4 baseline: 1981-2010. The published hot-day reference is 17 days/year. Pooled percentile ranges describe model/scenario spread; they are not a calibrated probability for a property. Mean and extreme tables use different ensembles.

Station comparison: 1991-2020 versus 2021-2025. Four NOAA station histories contain 51,136 daily records. These derived unadjusted summaries are not official NOAA Climate Normals, a causal attribution or a building-temperature model.

Can this place maintain the indoor conditions your activity needs?

Request documented system performance, coincident outdoor conditions and electrical capacity.

NPCC4 primary report, Tables 3-4 and Appendix C; station package methods

PREPARED META WORKFLOW / APPROVAL PENDING

Ask naturally. Investigate precisely.

The deterministic public-data workflow works today. Meta API access and an actual provider/tool demonstration remain unverified; no scripted model response is presented as live AI.

01

Clarify the quantity

“20,000 square feet” could mean mapped footprint, tax-lot floor area or usable indoor space.

02

Retrieve scoped evidence

Resolve native identities. Query official records, reporting hierarchies and paired climate observations.

03

Review the interpretation

Show each condition and its exact user wording. The user explicitly chooses whether to apply it.

04

Refresh before applying

Fetch the official identities again. A failed refresh preserves the existing investigation; model-supplied geometry is discarded.

Official judging criterion	Weight	Evidence / remaining gap
Impact	30%	Specific next investigation step; no measured business outcome claimed.
Meta AI Tooling	25%	Seven bounded tools prepared; actual approved provider proof still required.
Technical execution	20%	Native identities, source geometry, reporting scope, paired weather and reproducible checks.
Demo	25%	One question, three source-grounded reveals, one inspectable receipt.

Official rules and judging weights; entry deadline 4 Nov 2026, 9 pm New York

SELECTED SCIENTIFIC FOUNDATION

Sources are part of the product.

14 journal publications inform methods and interpretation; they are not 14 independent validations of GEONOS. Technical agency references and event rules are counted separately.

Menne et al. (2012)
GHCN-Daily archive; selected station records acquired.

Durre et al. (2010)
Daily quality assurance; app filters native quality flags.

Braneon et al. (2024)
NPCC4 regional mean/extreme tables; original baselines retained.

Ortiz et al. (2024)
Compound risks; additional variables are research context.

Yoon et al. (2024)
Regional energy context, not a building-load calculation.

Hersbach et al. (2020)
ERA5 methods; reanalysis arrays not acquired.

Muñoz-Sabater et al. (2021)
ERA5-Land support; no building observation implied.

Voogt & Oke (2003)
Surface versus air temperature; no LST raster acquired.

Stewart & Oke (2012)
Urban-form classification; no LCZ map fitted.

Ortiz et al. (2018)
NYC heatwave processes; simulations not rerun.

Ortiz et al. (2019)
Urban downscaling example; local outputs not acquired.

Thrasher et al. (2022)
NEX-GDDP data description; model arrays not acquired.

Maraun et al. (2017)
Bias-correction limitations; no correction model fitted.

Madrigano et al. (2015)
Resident heat vulnerability; not warehouse suitability.

Technical sources: NYC OTI/DCP, DEP stormwater methods, DOB/EPA benchmarking, NOAA GHCN-Daily and GHCNh documentation, NPCC4 official tables, NYC Health HVI and DOT route guidance. Source timestamps, quality flags, coverage gaps and acquisition limits remain attached to the deployed records and exported investigation.