




BUILDINGS
2025-007
BULLETIN
TECHNICAL

ISSUANCE DATE
July 30, 2025



ISSUER: Keith L. Wen, R.A. 
Assistant Commissioner
Code & Zoning Interpretation

PURPOSE: This Bulletin rescinds 3 TPPNs, 2 Directives, 14 Memoranda, 1 Letter which were issued by the Department but are no longer applicable under current Codes and Local Laws.

SUBJECT(S): Rescinding TPPNs, Directive, Memoranda, and Letter

RESCINDED DOCUMENTS

TPPN 16/88, TPPN 17/88, TPPN 18/88

Directive 23 of 1969, Directive 27 of 1970

Memo: 8/20/82, 10/21/69, 1/27/70, 2/6/70, 4/28/70, 1/20/71, 7/1/71, 7/7/70, 1/20/71, 3/7/72, 10/11/73, 12/9/75, 1/10/79, 12/10/80, 9/8/88

Letter 4/26/90

BACKGROUND

The Department of Buildings periodically reviews published Buildings Bulletins (BB), Policy and Procedure Notices (Technical, Operational, Legal, Administrative, OTCR) and the various Directives, Executive Orders, Memoranda and Letters issued in the past to ensure their continued consistency with current Departmental practice and to verify that new laws and regulations are incorporated into these documents.

The above listed TPPNs, Directive, Memoranda and Letter are rescinded effective immediately and are attached therein.

The rescinded documents will appear on the Department's website with the watermark **RESCINDED**. Because this review is ongoing, documents not specifically listed in this Bulletin may be addressed in future Bulletins. Watermarked Directives, Executive Orders, Memoranda, and Letters may be accessed through the online version of this Bulletin located at www.nyc.gov/site/buildings/codes/building-bulletins.page.

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



ISSUANCE #130

DEPARTMENT OF BUILDINGS

EXECUTIVE OFFICES

60 HUDSON STREET, NEW YORK, N. Y. 10013

CHARLES M. SMITH, Jr., R.A., Commissioner

312-8100

JACOB GRILL, P.E.
Assistant Commissioner
(212) 312-8301

**TECHNICAL
POLICY AND PROCEDURE NOTICE #16/88**

TO: DISTRIBUTION (See Attached List)
FROM: Jacob Grill, P.E., Assistant Commissioner *js*
DATE: September 23, 1988
SUBJECT: SAFETY DEVICES FOR CRAWLER TOWER CRANES

A) MANITOWOC 4000W, 4100W
American 9280, 9310

1. Anti-Two Blocking Device

The mid point, the boom point and jib point load hoists falls shall be equipped with anti-two blocking devices which will cut off the load hoist power and automatically cause the hoist drum brakes to be applied when the load block or ball comes into contact with the safety device.

After October 31, 1988 no renewals of Certificates of Approval and Operation will be issued unless the device is installed, or an order has been placed with the crane manufacturer for this device. Until the anti-two blocking device is installed the full power detent position on the past version or the up dated version of the drum clutch control valve on the Manitowoc 4000W and 4100 shall be eliminated or cut-off.

2. Drum Clutch Interlock Control

The drum clutch interlock control prevents more than one load drum from being operated at the same time. The installation of the interlock will also act as a deterrent for the operator to depend on the anti two blocking device to prevent a load block from pulling the boom over the back of the machine if he inadvertently or forgetfully leaves a hoist control in an engaged hoist position. The interlock modification shall be made prior to any machine moving to a new location.

RESCINDED BY BUILDINGS BULLETIN 2025-007

-2-

It is to be noted that the manufacturer does not permit simultaneous hoisting on separate falls.

3. Boom Hoist Cut-Off Limit Switch

For the Manitowoc and American Cranes the boom hoist cut-off limit switch which is mounted on the tower, and supplied by the manufacturer is acceptable. Also any device mounted on the gantry and made operable by the equalizer striking a limit switch arm shall be acceptable, if the horizontal or flat section of the equalizer strikes the arm or an extension of the limit switch arm. However, the extension of the limit switch shall be of a construction which does not allow the cut off position to be altered due to a flimsy or flexible extension arm.

The boom hoist cut off angle shall be set back 2° degrees. For the Manitowoc the new cut off angle shall be 72° and for the American machines the new cut off angle shall be 74°. The required modifications to the boom hoist cut-off switch or replacement of switches shall be made prior to moving the crane to a new site.

B) LINK BELT LS-718

1. Anti-Two Blocking Device

The boom point and jib point load falls shall be equipped with anti-two blocking devices which will cut-off the load hoist power and automatically cause the hoist drum brakes to be applied when the load block or ball comes into contact with the safety device.

After October 31, 1988 no renewals of Certificates of Approval and Operation will be issued unless the device is installed, or an order has been placed with the crane manufacturer for this device.

The feasibility of the interlock control for the LS-718 machine is presently being reviewed. The hoisting drums are hydraulically actuated rather than air actuated as on the Manitowoc and American Models.

It is to be noted that the manufacturer of the LS-718 crawler tower crane models does not permit simultaneous lifts on separate falls, therefore we direct that no such hoisting shall be allowed.

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

-3-

3

3. Boom Hoist Cut-Off Limit Switch

The boom hoist cut-off limit switch as supplied by the manufacturer is acceptable (all Link Belt crawler tower cranes registered with the Department have this device installed.)

The boom hoist cut-off angle shall be set back from 80° to 78° and shall be made prior to moving the crane to a new site.

RESCINDED

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



DEPARTMENT OF BUILDINGS

EXECUTIVE OFFICES

60 HUDSON STREET, NEW YORK, N. Y. 10013

CHARLES M. SMITH, Jr., R.A., Commissioner

312-8100

JACOB GRILL, P.E.
Assistant Commissioner
(212) 312-8301

ISSUANCE # 132

TECHNICAL
POLICY AND PROCEDURE NOTICE # 17/88

TO: DISTRIBUTION (See Attached List)

FROM: Jacob Grill, P.E., Assistant Commissioner

DATE: September 29, 1988

SUBJECT: PLUMENESS AND BOLT TORQUE REPORT FOR CLIMBER CRANES
(FORM # 32).

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



Form 32
ISSUANCE # 132

DEPARTMENT OF BUILDINGS

EXECUTIVE OFFICES
60 HUDSON STREET, NEW YORK, N. Y. 10013
CHARLES M. SMITH, Jr., R.A., *Commissioner*
312-8100

JACOB GRILL, P.E.
Assistant Commissioner
(212) 312-8301

**TECHNICAL
POLICY AND PROCEDURE NOTICE # 17/88**

This form is to be completed and sent or hand delivered to the Cranes and Derricks Division within Forty Eight (48) hours of the initial set up of an Internal or External climber crane, or after plumbing and torquing an External Climber Crane after each jump.

Crane C.D.# _____/C.N.# _____
Crane Location: _____

External Climbing Crane: ☐

(Check one)

Internal Climbing Crane: ☐

This is to certify that suveyor _____ measured the out of
(print name)
plumbness for _____ tower sections of the above crane with a tower
(number)
height of _____ feet _____ inches. The lean towards the following
directions indicated below was determined to be:

_____ inches _____
(direction) (manufacturers allowable)

_____ inches _____
(direction) (manufacturers allowable)

(Signature of Suveyor)

This is also to certify that the above newly installed _____ sections were
(number)
torqued to _____ feet-pound on _____ under the supervi-
(Date)
sion of:

(print name) (Signature) (Title)
The manufacturer's recommended bolt-torque value is _____ feet-pound.

NAME OF OWNER OR CONTRACTOR(print): _____

SIGNATURE OF OWNER OR CONTRACTOR: _____

NAME OF COMPANY: _____

ADDRESS: _____

TELEPHONE NUMBER:() _____

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



DEPARTMENT OF BUILDINGS

EXECUTIVE OFFICES

60 HUDSON STREET, NEW YORK, N. Y. 10013

CHARLES M. SMITH, Jr., R.A., Commissioner

312-8100

JACOB GRILL, P.E.
Assistant Commissioner
(212) 312-8301

ISSUANCE # 133

TECHNICAL
POLICY AND PROCEDURE NOTICE # 18 /88

TO: DISTRIBUTION (See Attached List)

FROM: Jacob Grill, P.E., Assistant Commissioner

DATE: September 29, 1988

SUBJECT: CERTIFICATION BY EXPERIENCED PERSON OF HAVING SUPERVISED
JUMPING OF EXTERNAL OR INTERNAL CLIMBER CRANE (FORM #33).

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



DEPARTMENT OF BUILDINGS

EXECUTIVE OFFICES
60 HUDSON STREET, NEW YORK, N. Y. 10013
CHARLES M. SMITH, Jr., R.A., Commissioner
312-8100

JACOB GRILL, P.E.
Assistant Commissioner
(212) 312-8301

Form CD 33
ISSUANCE # 133

**TECHNICAL
POLICY AND PROCEDURE NOTICE # 18/88**

This form is to be completed and sent or hand delivered to the Cranes and Derricks Division Forty Eight (48) hours before climbing or jumping a Tower Crane.

Crane C.D.# _____/C.N.# _____
Crane Location: _____

External Climbing Crane: ☐ (Check one)
Internal Climbing Crane: ☐

Date of Jump: _____

I, _____ representing the owner of the crane or contractor have been designated as the supervisor in charge of jumping the above crane. I will personally check that all horizontal bracing, collars, shoring, and wedges conforms to the drawings approved by the Cranes and Derricks Division.

I, _____, am a person having at least three (3) years of experience in construction or erection of Tower Cranes.

SUPERVISOR'S NAME (print) _____

SUPERVISOR'S SIGNATURE: _____

ADDRESS: _____

TELEPHONE NUMBER: _____

NAME OF OWNER OR CONTRACTOR (print) _____

SIGNATURE, OWNER OR CONTRACTOR: _____

NAME OF COMPANY: _____

ADDRESS: _____

TELEPHONE: _____

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

C O P Y

DIRECTIVE NO. 23 of 1969

The City of New York
DEPARTMENT OF BUILDINGS

Cranes

Advisative Engr. Jacob Grill, Crane & Derrick Section Date: Dec. 19, 1969

From: Thomas V. Burke, Director of Operations

Subject: Fire Extinguishers - Rules and Regulations for Power
Operated Cranes, Derricks and Cableways - Sub-Rule 28.1

The fire extinguishers required by the subject sub-Rule 28.1 shall be a type approved or listed by a nationally recognized testing laboratory, shall be kept in the cab or in the immediate vicinity of the crane or derrick and shall be of at least ten pounds carbon dioxide capacity, five pounds of dry chemical capacity or an equivalent type and size of fire extinguisher deemed acceptable by the Fire Commissioner.

This directive shall be enforced by the Crane and Derrick Section.

(Signed)

Thomas V. Burke
Director of Operations

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

The City of New York
HOUSING AND DEVELOPMENT ADMINISTRATION
Department of Buildings

DIRECTIVE NO. 27 OF 1970

TO: BOROUGH SUPERINTENDENTS

July 16, 1970

FROM: THOMAS V. BURKE, P.E. Director of Operations

SUBJECT: Revision of 8.5 of Reference Standard RS 19-2
relating to certificates of on-site inspection.

The Department of Highways has amended its rules and regulations relating to cranes (City Record - May 27, 1970; effective date - June 26, 1970). These rules provide for an increased maximum allowable sidewalk or roadway pressure of 3500 pounds per square foot instead of the previous 1500 pounds per square foot and revised platform requirements.

Therefore, section 8.5 of reference standard RS 19-2 is in the process of being amended to conform with Department of Highways rules and regulations to read as follows:

" 8.5 Notwithstanding the provisions of 8.0 through 8.4 where a crane is operated on the sidewalk or roadway, a permit from the department of highways shall be obtained and the pressure on such surface shall not exceed 3,500 pounds per square foot. The pressure shall be distributed on the roadway by means of timber platforms extending not less than twelve (12) inches beyond the base of the outriggers or treads on all sides and sufficiently thick to uniformly distribute the pressure as required above of all the loads including the weight of the crane. The timber mats shall have a minimum thickness of two (2) inches. An alternate method of distributing the load may be employed where a certificate of on-site inspection is issued."

The above shall be effective immediately.

NOTE: New matter has been underlined.

Thomas V. Burke
Thomas V. Burke, P.E.
Director of Operations

TVB/PG/vp
cc: Exec. staff
Industry
File

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

C O P Y

THE CITY OF NEW YORK
HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS

• Inspection
• Rules & Regulations
• Cranes

DEPARTMENTAL MEMORANDUM

DATE: October 21, 1969

TO: BOROUGH SUPERINTENDENTS

FROM: Jacob Grill, Administrative Engineer-Cranes and Derricks

SUBJECT: Rules and Regulations for Power Operated Cranes, Derricks
and Cableways

In order to implement the on-site inspection requirements of the above rules and regulations which are effective as of October 17, 1969, the following instructions should be given to all Construction Inspectors:

(1) Construction Inspectors to submit a report to borough superintendent indicating construction sites where a crane or derrick is in operation. Report to also indicate hoisting and rigging section inspection number.

(2) Construction Inspector to inspect foundation of all cranes on sites. Any questions as to condition of foundation should be immediately reported to borough superintendent.

(3) Inspectors are to check for a valid "Certificate of Inspection" from the department and for license of crane operator. Where a crane does not have a valid certificate, or operator does not have a license, Inspector is to notify Jack Grill at 566-0339; or George Durkin at 566-4433; or if these personnel are not available call Julius Schneider, Director of Special Projects at 566-2480.

In order for the Crane and Derrick section to keep track of the Cranes and Derricks through out the City a copy of the Inspectors report on "Location of Cranes to the Borough Superintendent" should be sent to Jack Grill at 2 Lafayette Street.

(Signed)

Jacob Grill
Administrative Engineer
Cranes and Derricks

THE CITY OF NEW YORK
HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS

Departmental Memorandum

JANUARY 27, 1970

TO: BOROUGH SUPERINTENDENTS

FROM: T.V. BURKE, DIRECTOR OF OPERATIONS

SUBJECT: ON-SITE INSPECTION

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

Local Law #73-1969 relating to Power Operated Cranes and Derricks superseded parallel Department Rules and became effective on January 8, 1970.

Section 8.0 through 8.4 of Reference Standard 19-2 deals with on-site inspections. Where on-site inspections are required the owner of the premises is required to file a Building Notice application with the borough office for each job site on which a crane or derrick is located. The borough offices have the responsibility of examining applications and inspecting all locations for on-site inspection certificates.

Effective at once all construction inspectors and steel inspectors shall visit all construction sites in their designated areas where cranes are located and they shall complete a prescribed "Notice" made out in quadruplicate for each piece of equipment. Construction inspectors shall inspect cranes on-site and steel inspectors shall inspect derricks on-site. The notices are to be distributed to the construction superintendent and the equipment operator.

If a certificate of on-site inspection is required but the equipment is operating without such certificate, the inspector will cross out paragraph B of the notice. Where on-site inspection certificate is not required but a notification to the department is required by Section 8.1.3.3. of Reference Standard 19-2, the inspector will cross out paragraph A of the notice.

THE PINK COPY OF THE NOTICE SHALL BE HANDED TO THE CONSTRUCTION SUPERINTENDENT AND TO THE EQUIPMENT OPERATOR. The yellow and white copies are to be submitted to the Chief Construction Inspector on the following morning. The Chief Construction Inspector shall retain the yellow copy and forward the white copy to Chief Engineer J. Grill, Cranes and Derricks Section, Room 8203, 100 Gold Street, New York, N.Y. 10038.

For the purpose of implementing this procedure, a service crane is one whose function or use is of an accessory or auxiliary nature. It is employed to furnish material or supplies to other cranes or equipment or to move material or supplies from one location to another on the site. Typical examples of service cranes are as follows:

A crane moving timber files or other construction material to a central location so that it may be lifted by a crane to the required areas of construction, or

A crane in an excavation that is moving blasting mats from one location to another.

A crane used to hoist or lower any article or material from a building or structure in the course of construction, alteration or demolition shall not be considered a service crane.

-342-


**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

-2-

ON-SITE INSPECTION

The notices as herein specified shall be distributed to all sites on which cranes and derricks, that do not come within the exceptions, are located. Distribution shall be completed by Friday, January 30th, 1970.

Attached herewith is a list of cranes and derricks which were on the construction site at the time the Rules and Regulations relating to Power Operated Cranes and Derricks became effective. A certificate of on-site inspection is not required for the listed cranes and derricks as long as they are operated on the site listed under "Location of Inspection."


Thomas V. Burke
Director of Operations

TVB/JL/sl

cc: all staff

-343-

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

HOUSING AND DEVELOPMENT ADMINISTRATION
Department of Buildings

12/2/70
Cranes
February 6, 1970

TO: Borough Superintendents
FROM: Director of Operations, T. V. Burke
SUBJECT: Accident Involving Cranes, Derricks and Scaffolds

The cooperation of the Police Department has been enlisted in notification when scaffold, crane or derrick accidents occur and in safeguarding accident sites. The Police Department T.O.P. 13 series of 1970 which details the precise action to be taken in the event of accidents has been issued to all Police Department personnel.

Upon notification of an accident the Chief Inspector of Construction-Operations or the inspectors on duty at the Emergency Desk shall notify the borough offices and the Director, Division of Cranes and Derricks in the manner outlined in Directive #5-1970 "Manual of Emergency Procedure." Inspection shall be conducted in a manner detailed in Directive #5 of 1970. Copies of Police Department T.O.P. #13 are attached.

Thomas V. Burke

Thomas V. Burke
Director of Operations

TVB:JL:rmr
cc: Executive Staff
Chief Construction Inspectors

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

**HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS**

DEPARTMENTAL MEMORANDUM

DATE: April 28, 1970

TO: Borough Superintendents


FROM: Director of Operations, T. V. Burke

SUBJECT: Cranes & Derricks - "ON SITE REPORT"

The new form #62 - "On Site Report" was distributed on April 17, 1970. The Chief Inspectors were briefed on the use of the form at a meeting held on April 16, 1970.

All construction and steel inspectors shall be instructed that it is their responsibility to file an "On Site Report" for each crane or derrick when they notice the equipment on site for the first time.

All inspectors are also to be instructed that there are no exemptions from the requirement to obtain an On Site Inspection Certificate where cranes are positioned on sidewalks and highways in connection with new building construction.


Thomas V. Burke
Director of Operations

TVB:JL:rmr
cc: Executive Staff

THE CITY OF NEW YORK
HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS

DEPARTMENTAL MEMORANDUM

DATE: January 20, 1971

TO: Borough Superintendents; Director, Division of Cranes and Derricks

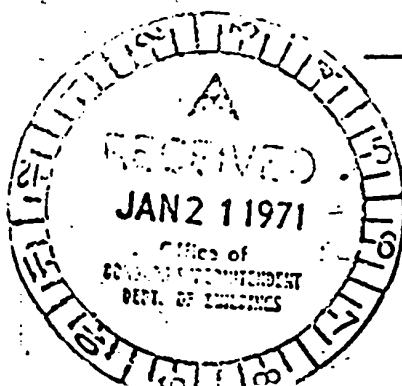
FROM: Thomas V. Burke, Director of Operations

SUBJECT: Cranes with Booms and Jibs, Including any Extensions,
Exceeding 250 Feet.

1. Plans and applications for buildings or extensions to be constructed of reinforced concrete, which exceed 200 feet in height, are not to be approved until a note has been placed on the plans that provisions have been made in the design to support one or more climbing cranes sufficient in number and capacity to raise concrete, reinforcing steel, forms, and such other materials as may be required for construction of the building.
2. Where a crane with a boom exceeding 250 feet in length is to be used in connection with construction, approval must be obtained for such crane from the Crane and Derrick Division before the borough office issues an approval of an application for an on-site inspection.
3. The Crane and Derrick Division will require, before such approval, reinspection of the crane, a magnaflux test of welds made at least once a year, and the installation of safety devices that have been approved by the Board of Standards and Appeals, as provided in Section 19.1 of the Administrative Code. If the safety devices are not available for immediate installation, the Crane and Derrick Section will require proof that such devices have been ordered and the approximate date of installation.
4. The Director of the Crane and Derrick Division shall keep Mr. Schneider, Mr. Burke, and the Department of Highways advised of each location where on-site approval has been withheld.

TVB/df

CC: Exec. Staff



Thomas V. Burke
Thomas V. Burke
Director of Operations

Distribution
Minkin - 2 ✓
Kent - 30
Clarke - 55
Roberts - 2
Plan Desk - 2

-485-

HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS

DEPARTMENTAL MEMORANDUM

DATE: July 1, 1971

TO: Borough Superintendents
FROM: Director of Operations, T. V. Burke
SUBJECT: Preliminary Inspection Prior to Demolition

Effective at once preliminary inspections prior to issuance of demolition permits for city owned structures in Urban Renewal Areas and for demolition of structures under the Board of Health resolution and certification, will be made by inspectors of the Department of Development. If all other requirements are met the Demolition Permit shall be issued without such inspection by Department of Buildings personnel provided that the Form 26C "Request for Inspection Prior to Demolition" signed by a Demolition Inspector of the Department of Development and countersigned by either Seymour B. Feller, Attilio D. Ragogna or M. Einhorn is presented with the application for the Demolition Permit.

Only items 1 through 4 shall be completed. By agreement the Department of Development will notify the respective Borough Superintendent when it is found that demolition has commenced without a permit. When so notified the Borough Superintendent shall cause an inspection to be made and proper action taken.

Construction Inspectors shall be responsible for surveillance and inspection of the demolition and for compliance with all laws, rules and regulations pertaining to demolition.

This memo supersedes paragraph C of memo "Demolition Under Board of Health Resolution" dated December 12, 1970.

Thomas V. Burke

Thomas V. Burke
Director of Operations

TVB:JL:rmr

cc: Ass't. Commissioner, F. Padavan
Chief Inspector of Constr.-Operations, J. Linker
Department of Development
Director of Demolition, S.B. Feller

-535-

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

W. R. Kuyper

DEPARTMENT OF ENVIRONMENT AND DEVELOPMENT ADMINISTRATION
NEW YORK, NEW YORK

DEPARTMENT OF BUILDINGS
NEW YORK, NEW YORK

DEPARTMENT OF BUILDINGS
NEW YORK, NEW YORK

JULY 7, 1970

MANUAL OF PROCEDURE

FOR THE PROCESSING AND ISSUANCE OF
CERTIFICATES OF APPROVAL AND OPERATION FOR CRANES

Categories

- I. Cranes with Booms and Jibs Less Than 250' in Length for Which a Department Certificate of Inspection had been Issued after Jan. 1, 1965.
 - II. Cranes used Exclusively for Pile Driving.
 - III. New Cranes and Other Cranes with Boom and Jibs Exceeding 250' in Length.
 - IV. Issuance of Permanent Certificates of Approval and Operation for Cranes for which Temporary Certificates had previously been Issued. (3.1.3 Subd. 4 RS19-2).
-
- I. Cranes with Booms and Jibs Less Than 250' in Length for which a Department Certificate of Inspection had been Issued after Jan. 1, 1965.
 - A. A Certificate of Approval and Operation will be issued upon compliance with the following:
 1. Maximum boom and jib combinations will be accepted for the lengths not exceeding those indicated in the Department record.
 2. Where boom and jib lengths exceed the lengths in the Department records, evidence must be submitted that the boom and jib sections were purchased for the subject crane prior to October 17, 1969, and are compatible with the crane.
 3. The boom shall be magnafluxed by an approved welding inspection agency employing inspectors approved by the Department at the owners' cost and expense.

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

-2-

4. The crane shall pass a load test as follows:

- a. The test shall be performed at two positions designated by the Department.
- b. The final load rating shall be at least 20% less than the test loads would indicate but shall not exceed the manufacturer's rated capacity.
- c. The load rating chart shall be revised throughout, if necessary, to reflect the results of the test.
- d. At intermediate positions between test positions, the revisions shall be on a proportionate basis.
- e. The test is to be performed at the cost and expense and on the sole responsibility of the owner.
- f. The Department is to be informed at least three (3) working days in advance of the location, date, and time that the test is to be performed to enable an inspector of the Department to witness the test.

B. A temporary Certificate of Approval and Operation will be issued for ninety (90) days, non-renewable, subject to the load test provided that Items 1, 2, and 3 had been fully complied with; and provided further that the lifting capacity on the manufacturer's load rating chart (based on 75% of the tipping capacity) are reduced 20%.

II. Cranes Used Exclusively for Pile Driving

A. Pile driving equipment for which temporary Certificates of Approval and Operation have been issued or for which proof is submitted of operation and use in the City of New York on and after January 1, 1965 and before January 8, 1970 will receive a Certificate of Approval and Operation under the following conditions:

1. Boom shall be completely magnafluxed by an approved welding inspection agency employing inspectors approved by the Department at the owner's cost and expense.
2. A certification from the manufacturer that the boom was designed for the machine and was purchased prior to January 8, 1970. Where this information is not available or where the boom was purchased after January 8, 1970, design calculations must be submitted.

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

-3-

3. Range charts shall be submitted.

4. A load test shall be performed as follows:

- a. The test shall be performed at two positions designated by the Department.
- b. The final load rating shall be at least 20% less than the test loads would indicate but shall not exceed the manufacturer's rated capacity.
- c. The load rating chart shall be revised throughout, if necessary, to reflect the results of the test.
- d. At intermediate positions between test positions, the revisions shall be on a proportionate basis.
- e. The test is to be performed at the cost and expense and on the sole responsibility of the owner.
- f. The Department is to be informed at least three (3) working days in advance of the location, date, and time that the test is to be performed to enable an inspector of the Department to witness the test.

B. A temporary Certificate of Approval and Operation will be issued for ninety (90) days, non-renewable, subject to the load test provided that Items 1, 2, and 3 had been fully complied with; and provided further that the lifting capacity on the manufacturer's load rating chart (based on 75% of the tipping capacity) are reduced 20%.

III. New Cranes and Other Cranes with Boom and Jibs
Exceeding 250' in Length

1. All new cranes and other cranes with booms and jibs exceeding 250' for which temporary Certificates have not been previously issued under Sec. 3.1.1 Subd. 4 RS19-2, shall submit design data specified in Sec. 3.1 Subd. 1, 2, and 3.

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

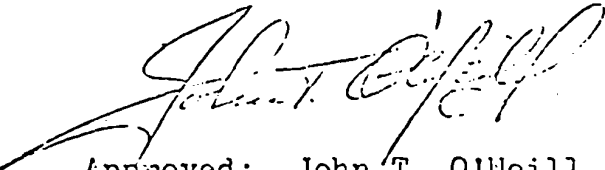
-4-

2. Non-renewable temporary Certificates of Approval and Operation may be granted for a period of ninety (90) days when the examination of the design data by the Department has established substantial compliance to the satisfaction of the Commissioner, provided that information is submitted of satisfactory quality control of the welding in the manufacture of the machine or the boom and other designated design areas are magnafluxed by an approved welding inspection agency employing inspectors approved by the Department.

IV. Issuance of Certificates of Approval and Operation for Cranes for which Temporary Certificates had Previously been Issued (3.1.1 Subd. 4 RS19-2).

The crane shall be tested as follows:

- a. The test shall be performed at two positions designated by the Department.
- b. The final load rating shall be at least 20% less than the test loads would indicate but shall not exceed the manufacturer's rated capacity.
- c. The load rating chart shall be revised throughout, if necessary, to reflect the results of the test.
- d. At intermediate positions between test positions, the revisions shall be on a proportionate basis.
- e. The test is to be performed at the cost and expense and on the sole responsibility of the owner.
- f. The Department is to be informed at least three (3) working days in advance of the location, date, and time that the test is to be performed to enable an inspector of the Department to witness the test.


Approved: John T. O'Neill
Commissioner

Date July 7, 1970

-383-

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

**THE CITY OF NEW YORK
HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS**

DEPARTMENTAL MEMORANDUM

DATE: March 7, 1972

TO: Borough Superintendents
FROM: Ira M. Sherman, R.A., Ass't. to Director of Operations
SUBJECT: Hod Hoist, Scaffolds, and Out-Rigger Permit Fees

Special fees shall not be required for hod hoists, scaffolds, or out-riggers, as there is no provision in the Administrative Code for such fees.

These types of equipment shall either be filed as amendments to new building or alteration applications being examined, or filing fees required per C26-32.4 shall be paid for installation of such equipment filed separately on building notice applications.

Submitted by,

Ira M. Sherman

**Ira M. Sherman, R.A.
Ass't. to Director
of
Operations**

IMS/sl

cc: Executive Staff

655

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

October 11, 1973

Borough Superintendents

Thomas W. Burke - Director of Operations

Revision to C 26-35.0 of the Building Code - Crane on-site inspection and fees as described in Local Law 50/73.

On September 21, 1973 the Mayor signed Local Law 50/73 which became effective immediately. Copies of the new legislation are forwarded herewith. The following procedures shall be effective upon filing hereafter of building notice applications for crane on-site inspections (Form 21 C).

- I) Cranes with boom lengths, including jibs and extensions thereof, which are less than 250 feet:
 - 1.) Fee remains \$25.00

- II) Cranes with boom lengths, including jibs and extensions thereof, which are 250 feet and longer and which are inspected during the normal work week:
 - 1.) Fee increased to \$50.00
 - 2.) Plan examiner shall notify the applicant that approval of the above noted machines by Crane and Derrick Division is required. This shall be noted on an Objection sheet. Crane and Derrick Division will check fee and note on the examiners objection sheet whether an appointment has been made for the inspection of the crane. If appointment is made the plan examiner shall continue to examine the building notice application for on-site inspection.

- The Crane and Derrick Division will notify the chief construction inspector of the borough involved of the scheduled crane inspection and the chief construction inspector shall schedule an on-site inspection in conjunction with the crane division.


- III) Cranes with boom lengths, including jibs and extensions thereof, which are 250 feet and longer and which are to be inspected by the Crane and Derrick Division on days other than the normal work week (Saturdays, Sundays and holidays):
 1. Fee increased to \$100.00
 2. Plan examiner shall notify the applicant that approval of the above noted machines by Crane and Derrick Division is required. This shall be noted on an Objection sheet. Crane and Derrick Division will check fee and note on the examiners objection sheet whether an appointment has been made for the inspection of the crane. If appointment is made the plan examiner shall continue to examine the building notice application for on-site inspection.

Cont'd

802

The Crane and Merrick Division will notify the chief construction inspector of the borough involved of the scheduled crane inspection and the chief construction inspector shall schedule an on-site inspection in conjunction with the crane division, except construction inspectors will not make Saturday, Sunday or holiday inspections.

IV) Fees shall be paid to Borough Cashier at time of filing of Building Notice Applications.



Thomas V. Burke, P.E. - Director of
Operations
Department of Buildings

cc: 5 Borough Superintendents
T.V. Burke
J.W. Schneider
P.Olin
I. Minkin
L. Beck
C. Mauraides
G. Durkin
J. Grill
A. Sterling
All Engineers

HOUSING AND DEVELOPMENT ADMINISTRATION
DEPARTMENT OF BUILDINGS

DEPARTMENTAL MEMORANDUM

DATE: December 9, 1975

TO: Borough Superintendents

FROM: Thomas V. Burke-Director of Operations

SUBJECT: Review of building notice applications for cranes with booms over 250 feet and for derricks (Form 21c)-Modifies Directive 14/75.

Directive 14/75 is hereby modified to require review of building notice applications for cranes with booms, including any extensions, over 250 feet, and also for derricks. The building notice application for an on-site inspection for such machines shall be referred to the Crane and Derrick Division. Upon approval of the use of the crane or derrick by the Crane and Derrick Division, further examination of the calculations for the founding of the crane or derrick will not be necessary unless specifically requested by the applicant.

In the matter of field inspection of the founding of the crane or derrick in order to check compliance with the architects or engineers plans, section 5 of Directive #14/75 will apply.


Thomas V. Burke, P.E.
Director of Operations

Comm. Walsh
Deputy Comm. Jenkins
Asst. Comm. Parascondola
Executive Staff
Execo. Superintendents

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

**THE CITY OF NEW YORK
DEPARTMENT OF BUILDINGS**

DEPARTMENTAL MEMORANDUM

DATE: January 10, 1979

TO: Borough Superintendents and Crane & Derrick Sections

FROM: Cornelius Dennis-Director of Operations

SUBJECT: Banding of Plasterboard

Section 23.3.1 (b) of Reference Standard RS 19-2 of the code refers to Handling and attaching of a load by a crane and reads:

23.3.1 - The appointed individual directing the lift shall see that:


23.3.1 (b) - The load is well secured and properly balanced in the sling or lifting device before it is lifted more than a few inches.

The above section shall be interpreted as follows:

1- Where more than one piece of plasterboard is lifted into a building construction site the plasterboard shall be banded prior to being lifted with either nylon, polypropylene or other suitable types of banding. The plasterboard shall be banded across the width approximately one foot from each end or across the width and length at the center of each dimension.

2- The banding may either be made at the site or at the factory.

3- The above noted banding is to be considered a minimum requirement, and where needed additional ties or bands are to be used.


Cornelius Dennis, P.E.
Director of Operations

JG:bs

CC: Comm. Fruchtman
Executive Tech. Staff
Industry

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

THE CITY OF NEW YORK
DEPARTMENT OF BUILDINGS

DEPARTMENTAL MEMORANDUM

DATE: December 10, 1980

TO: Borough Superintendents & Jacob Grill, Director of Central Inspections

FROM: Irwin Fruchman, P.E., Commissioner *2*

SUBJECT: On Site Inspections - Form 21C 7 CD31:
(Safety on the Job Site)

The procedures set forth in this memo supercede all directives and memorandum which are inconsistent with the following orders:

Requests for approval of on site crane applications for booms over 250' in length as well as tower climber cranes, Chicago booms and derricks shall be referred by the Borough Superintendent to the Crane & Derrick Division prior to approval. Said Division shall require compliance with all of the safety criteria listed in Paragraph 1. All other crane applications shall require the filing of a separate amendment by the filing engineer with the Borough Office stating that no lifting will occur over a sidewalk or roadway. If such applications do involve lifting over a sidewalk or roadway Paragraph I criteria shall also apply.

I. All buildings or structures where the lifting of loads will occur over sidewalks or roadways, evidence of compliance with the following will be required:

(1) that the contractor has furnished to the engineer of record all construction loads to be imposed on the structure by construction equipment. The engineer of record shall certify to the adequacy of the structure to sustain these loads.

(2) Except for a machine lifting a maximum load of 2 tons and remaining on site for a maximum of 48 hours, the contractor has prepared a drawing indicating locations for landing of materials and maximum permitted weights. This drawing shall include requirements which must be fulfilled before loads are landed (See Attached Sample). This drawing shall be submitted by the contractor or the owner's engineer along with the "on-site" Building Notice to the Department of Buildings. An approved copy of this drawing shall be kept on the job site by the owner's representative. Modification of requirements shown on the drawing may be made upon approval by the engineers filing of, and approval of an amendment filed with the department.

1739

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**


- 2 -

Memo

Subject: On Site Inspections - Form 21C 7 CD31:
(Safety on the Job Site)

(3) During all lifting or hoisting operations a safety coordinator designated by the general contractors or the builder or the owner shall be responsible for the control of pedestrian and/or vehicular traffic within the hoisting area. The name of the designated safety coordinator shall be included in the application and shall be kept current during the period when the lifting operations are active. Flagmen shall be utilized under the supervision of the safety coordinator to stop vehicular and/or pedestrian traffic, as appropriate. Qualifications of the designated safety coordinator are that he possess either a professional engineer license, registered architect's license or has at least five years of construction experience.

(4) When requested by the Department of Transportation, Commissioner or the owner pre-construction meetings shall be held to develop operational procedures pertaining to the use of sidewalks, street lanes, detours of pedestrian traffic and vehicular traffic. Such agreed upon procedures shall be adhered to by all contractors and sub-contractors and monitored by the designated safety coordinator.


Irwin Fruchtmann, P. E.
Commissioner

Attachments:

Form CD31

Sample "Landing of Loads" Diagram

Sample "Load/Radios" Diagram

IF:IEM:PEO:JC:ap

cc:

Greater New York Equipment Association

General Contractors Association

BIAC

Professional Societies (All Boroughs)

Borough Superintendents

Executive Staff

BOMA

Real Estate Board

File

1740

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**

FORM CD 31

**CITY OF NEW YORK
DEPARTMENT OF BUILDINGS**

DESIGNATION OF SAFETY COORDINATOR

DATE: _____

RN # _____

CT # _____

ADDRESS/BOROUGH: _____

BLK # _____ LOT _____

DEPARTMENT OF BUILDINGS
120 WALL STREET - Room 1525
NEW YORK, NEW YORK 10005

GENTLEMEN:

Owner or Contractor

I have been apprised of the requirements to provide flagmen to stop pedestrian traffic when lifting over the sidewalk, and to stop vehicular traffic, which is under the load, when lifting over the roadway.

Mr. _____, representing the owner or contractor, has been designated as safety coordinator to ensure that these safety precautions are adhered to.

Signature (Owner or Contractor)

NAME: _____

ADDRESS: _____

TELEPHONE NO. _____

SAFETY COORDINATOR:

_____, am a P.E., R.A., or a person having at least 5 years of construction experience hereby certify that I will act as the designated safety coordinator and shall be responsible for the control of pedestrian and vehicular traffic within the designated hoisting areas. I shall also supervise compliance with the Building Notice Application and the drawings which form part of this On-Site Lifting Device Application.

_____,
(Name)

Signature

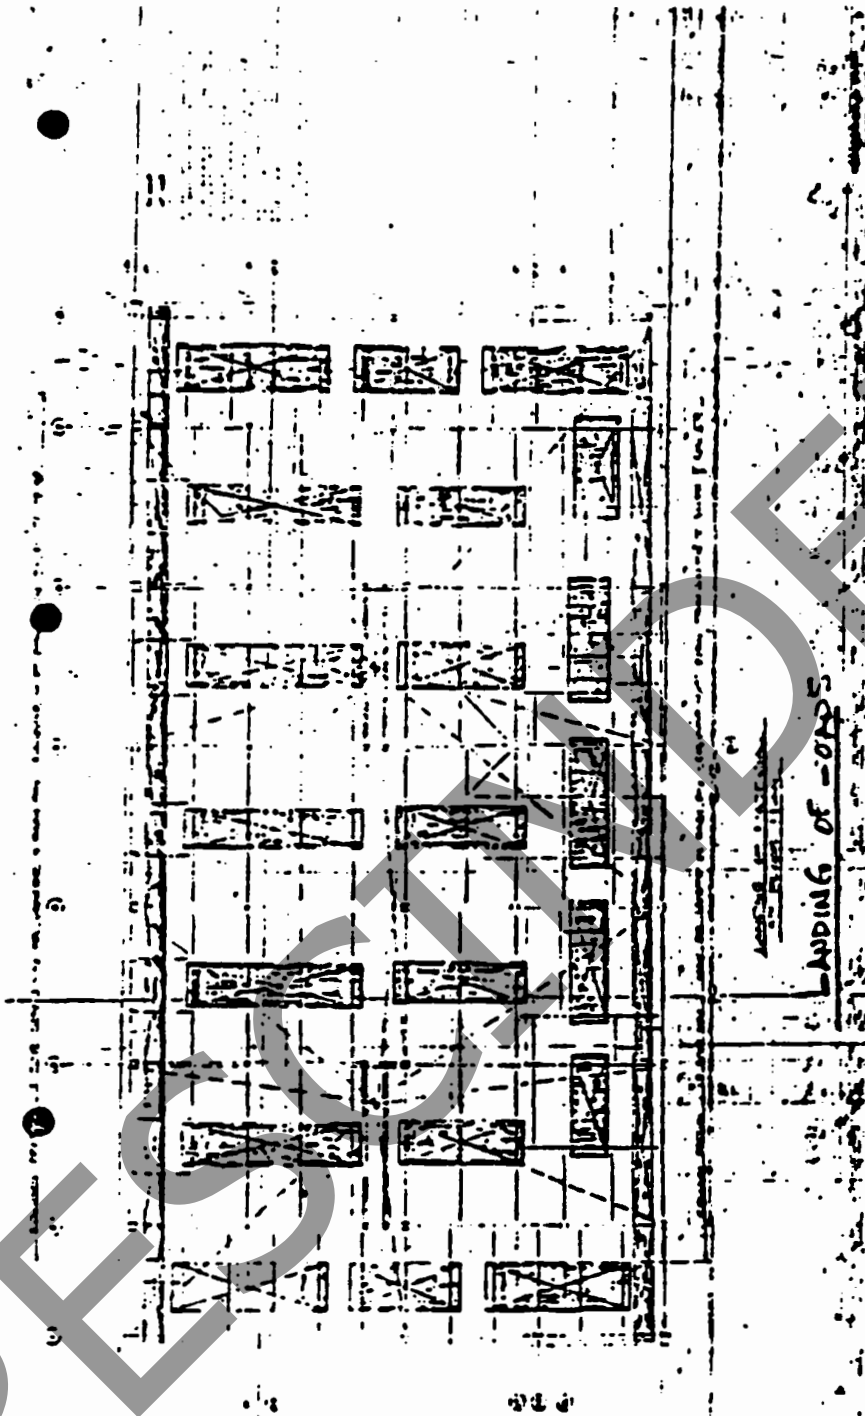
NAME: _____

ADDRESS: _____

TELEPHONE NO. _____

1741

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



1742

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



1743

**RESCINDED BY BUILDINGS
BULLETIN 2025-007**



DEPARTMENT OF BUILDINGS

EXECUTIVE OFFICES

60 HUDSON STREET, NEW YORK, N. Y. 10013

CHARLES M. SMITH, Jr., R.A., *Commissioner*

312-8100

JACOB GRILL, P.E.
Assistant Commissioner
(212) 312-8301

DEPARTMENTAL MEMORANDUM

TO: Cranes and Derricks Examiners

FROM: Jacob Grill, P.E., Assistant Commissioner *JS*

DATE: September 8, 1988

SUBJECT: REMOVAL OF HORIZONTAL NETTING IN LIFTING AREAS

Crane Notice applications are to show the extent of the removal of horizontal netting.

Where the removal of horizontal netting exceeds forty (40) feet a variance is to be obtained from the office of operations in accordance with operations Policy and Procedure Notice # 9/88.

cc: Charles M. Smith, Jr., R.A., Commissioner
Executive Staff
Robert VanAlphen, Chief Inspector/Best Squad
Hoisting and Rigging Inspectors



DEPARTMENT OF BUILDINGS
EXECUTIVE OFFICES
60 HUDSON STREET, NEW YORK, N.Y. 10013
RUDOLPH J. RINALDI, COMMISSIONER
312-8100

April 26, 1990

Mr. Joseph John Besada
Sales Manager
Skyhook, Inc.
20 North Avenue
Larchmont, New York 10538

Re: BEK Mobile Work Platform

Dear Mr. Besada:

After our last telephone conversation, we held an in-house meeting to resolve the issues of the above reference subject matter.

Since your equipment is attached to the building walls, you need a Board of Standards and Appeals approval for such equipment. Then your applicant (professional engineer or registered architect) files an application for the use of said equipment. The application shall include the plan showing how the equipment is attached to the building walls and calculations that equipment is capable of actual loading, ground condition supporting this equipment and strength of wall connections. The applicant must file a control inspection report verifying above requirements.

The application shall be filed in the borough offices of the Department of Buildings where the equipment is being used.

Very truly yours,

Nalin T. Patel
Nalin T. Patel, P.E.
Director of Local Law Reveiw

NTP:rmr

cc: Commissioner R. J. Rinaldi
First Assistant Commissioner, G. C. Sakona, P.E.
Assistant Commissioner, J. Grill, P.E.—Cranes & Derricks
Borough Superintendents
Administrative Elevator Inspector, A. Watson