Todo list

create program that calculates system parameters . . . 7
create graphs with the four different conditions and the tangents . . . 7
Figure: figure of four graphs — Left Wheel . . . 7
Figure: figure of four graphs — Right Wheel . . . 7
write short documentation paragraph about the program and the graphs . . . 7
text . . . 8
add resulting parameters and short paragrahp . . . 8
add left motor description with parameters . . . 9
EQUATION: add averaged parameters for left motor . . . 9
EQUATION: differential equation with parameters . . . 9
EQUATION: transfer function with parameters . . . 9
add right motor description with parameters . . . 9
EQUATION: add averaged parameters for right motor . . . 9
EQUATION: differential equation with parameters . . . 9
EQUATION: transfer function with parameters . . . 9
create Simulink simulation of the control loop . . . 10
Figure: image of the the simulink control loop . . . 10
Figure: plot of reference variable, the manipulated variable and the controlled variable from the Simulink simulation . . . 10
write short documentation paragraph about the Simulink simulation and the resulting plot . . . 10
explain the effect of the sampeling time . . . 10
explain what non liniear elemet is needed for the simulation to real conditaions transfer . . . 10

OTH REGENSBURG

Praktikum Regelungstechnik (RTP)

Versuch T4:
RetBot system identification, part II

2026-05-20

Gruppe 38
Marius Off
Janis Graf

Inhaltsverzeichnis

Todo list **1**

1. Preparations **4**
1.1. (aV) Steps to solve the control task 4
1.2. (bV) Block diagram of the control loop 5
1.3. (cV) Block diagram of a distance control system (according to DIN IEC 60050-351). 5

2. Experiment T4: RetBot system identification, part 2 **7**
2.1. (d) System description 7
2.1.1. Resulting Parameters 8
2.2. (e) Differential equations and transfer functions for both drives. 9
2.2.1. Left Motor 9
2.2.2. Right Motor 9
2.3. (f) Simulink simulation of the control loop 10

A. Appendix Frontmatter **11**
A.1. Declarations 11

B. Appendix Code and Resources **13**
B.1. Code used for the analysis of the Preperations 13

1 Preparations

1.1. (aV) Steps to solve the control task

In order to solve a control problem, a mathematical model of the controlled system is first developed and the performance requirements of the control system are defined. The controller is then designed based on this, during which the structure and parameters of the control law are specified. Finally, the controller is implemented in hardware or software and validated on the actual system. This process is illustrated in Figure 1.1 according to Lunze [2].

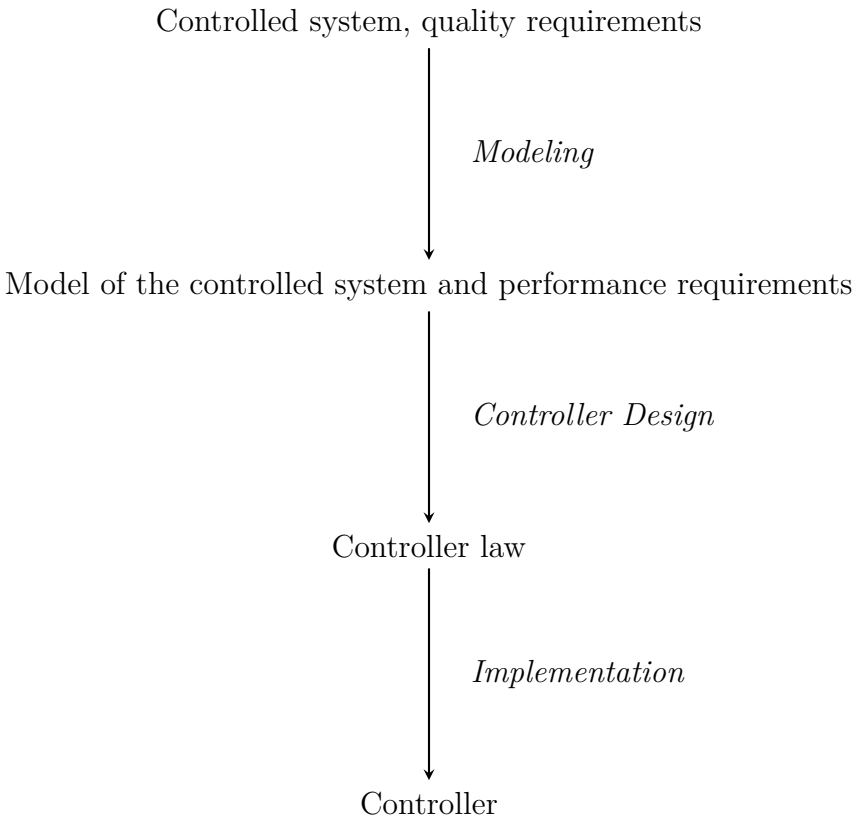


Abbildung 1.1.: Approach to control engineering problems according to Lunze [2]

1.2. (bV) Block diagram of the control loop


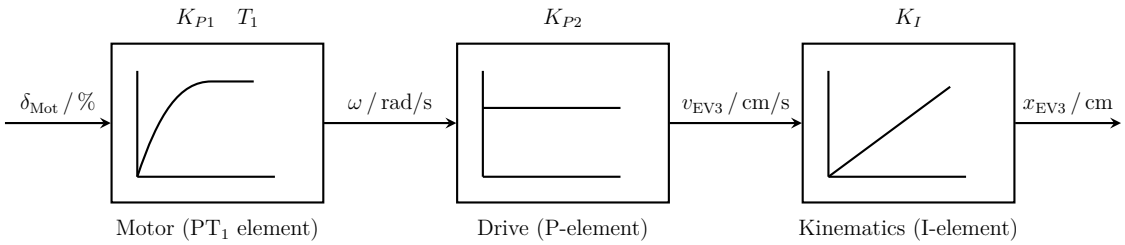


Abbildung 1.2.: The block diagram illustrates the configuration of the EV3 robot.

The control process of the EV3 robot (Figure 1.2) begins with the duty cycle δ, which is provided as an input signal in the form of pulse width modulation (PWM). This signal determines the average voltage of the DC motor and, consequently, the torque and rotational speed. The resulting rotational speed is transmitted to the wheels via the gearbox and converted into the robot's linear translational speed. Finally, the robot's kinematics describe the relationship between the rotational movements of the individual wheels and the resulting overall movement of the robot.

1.3. (cV) Block diagram of a distance control system (according to DIN IEC 60050-351).

Diagram 1.3 shows a block diagram of a distance control system using a P controller according to DIN IEC 60050-351 [1]. The system consists of a reference variable w (target distance), a control difference e, a controller output m, a manipulated variable y, a disturbance variable z_y, a controlled variable x (actual distance), and a feedback variable r. The controlling element (K_P) processes the control difference to generate the controller output, which the final controlling element converts into the manipulated variable acting on the controlled system. The disturbance z_y acts additively on the manipulated variable, and the measuring element derives the actual distance from the distance travelled, $x = x_0 - x_{\mathrm{traveled}}$, providing the feedback variable r.

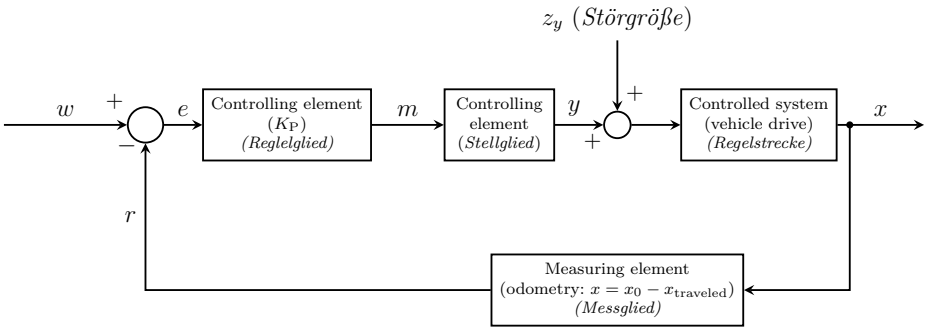

w: reference variable (*Führungsgröße*, target distance)
e: control difference (*Regeldifferenz*), $e = w - r$
m: controller output (*Reglerausgangsgröße*)
y: manipulated variable (*Stellgröße*)
z_y: disturbance variable (*Störgröße*)
x: controlled variable (*Regelgröße*, actual distance)
r: feedback variable (*Rückführgröße*)

Abbildung 1.3.: Block diagram of a distance control system using a P controller according to DIN IEC 60050-351

2 Experiment T4: RetBot system identification, part 2

2.1. (d) System description

(d) Use the recorded data from the previous experiment and write a Matlab program that calculates the data required for the system description for both the left and right drives. Draw graphs containing the four different conditions and the tangents, ... you applied for determining the system behavior. Consider a reasonable time frame, rather than adopting a "take what's available" approach. [3]

create program that calculates system parameters

create graphs with the four different conditions and the tangents



figure of four graphs — Left Wheel



figure of four graphs — Right Wheel

write short documentation paragraph about the program and the graphs

The distance traveled by the wheels is required to analyze the measurement data. To this end, the recorded QEI signals are converted into distances x_i using the following equation:

$$x_i = \frac{steps}{360^\circ} \cdot d_R \cdot \pi, \tag{2.1}$$

where d_R denotes the wheel diameter. For the EV3 robot in question, $d_R = 5{,}6\,\text{cm}$. The calculation is performed separately for the left wheel and the right wheel, for different duty cycles in each case.

text

2.1.1. Resulting Parameters

add resulting parameters and short paragrahp

2.2. (e) Differential equations and transfer functions for both drives.

> *(e) Specify the descriptive differential equations and transfer functions for both the left and right drives (note: average value across the different duty cycles). Compare the step response of the identified system with the measured data to identify any inconsistencies.* [3]

The following paragraphs describe the differential equations and transfer functions for both the left and right drives using constants from the previous section.
The differential equation for an IT_1 system is given by:

$$T_1\dot{x}(t) + x(t) = K_I \int x_e(t)\,dt \tag{2.2}$$

The transfer function for an IT_1 system is given by:

$$G(s) = \frac{K_I}{s(T_1 s + 1)} \tag{2.3}$$

$$h(t) = K_I \left(t - T_1(1 - e^{-\frac{t}{T_1}})\right) \tag{2.4}$$

2.2.1. Left Motor

add left motor description with parameters

For the left motor, the averaged parameters are given by Figure 2.1:

EQUATION: add averaged parameters for left motor

This yields the differential equation for the velocity $v_L(t)$:

EQUATION: differential equation with parameters

The corresponding transfer function $G_L(s)$ is:

EQUATION: transfer function with parameters

2.2.2. Right Motor

add right motor description with parameters

For the right motor, the averaged parameters are given by Figure 2.1:

EQUATION: add averaged parameters for right motor

This yields the differential equation for the velocity $v_R(t)$:

EQUATION: differential equation with parameters

The corresponding transfer function $G_R(s)$ is:

EQUATION: transfer function with parameters

2.3. (f) Simulink simulation of the control loop

(f) Create a Simulink simulation of the control loop designed in the preparation phase for the distance control using the identified system as the plant and a P controller. Use a gain $KP = -10\,\%\,\mathrm{cm}^{-1}$*, a target distance of* 25 cm *and an initial distance of* 80 cm *for testing. Use the integration method ode3 (Bogacki-Shampine) with a fixed step size of* 20 ms*. Do not forget the rate-limit-block (see 3.7) and use a value of* $\frac{4\,\%}{20\,ms}$*.*

Plot the reference variable, the manipulated variable and the controlled variable.

What does this sampling time mean in terms of control engineering?
Which nonlinear element do you also need to add to the simulation to simulate real conditions? [3]

create Simulink simulation of the control loop



image of the the simulink control loop



plot of reference variable, the manipulated variable and the controlled variable from the Simulink simulation

write short documentation paragraph about the Simulink simulation and the resulting plot

explain the effect of the sampeling time

explain what non liniear elemet is needed for the simulation to real conditaions transfer

A Appendix Frontmatter

A.1. Declarations

1. Wir erkläre hiermit, dass wir dieses Dokument selbstständig verfasst, noch nicht anderweitig für Prüfungszwecke vorgelegt, keine anderen als die angegebenen Quellen und Hilfsmittel benutzt sowie wörtliche und sinngemäße Zitate als solche gekennzeichnet haben.

Regensburg, den 2026-05-01,

”	Marius Off	Matrikelnummer: 3416002,
”	Janis Graf	Matrikelnummer: 3377251

Ort, Datum und Unterschrift

Abbildungsverzeichnis

1.1. Approach to control engineering problems according to Lunze [2] 4
1.2. The block diagram illustrates the configuration of the EV3 robot. 5
1.3. Block diagram of a distance control system using a P controller according to DIN IEC 60050-351 6

B Appendix Code and Resources

B.1. Code used for the analysis of the Preperations

Editorial note — Source code omitted

The full source code for the analysis (a Jupyter notebook of this time approximately 1,500 lines and a simulink model) is ***not*** included in this appendix. Including it as a verbatim listing caused major build instability again and was therefore deliberately omitted.
The complete source can be obtained by either of the following means:

- By email request to `janis.graf@st.oth-regensburg.de`
- Via requesting access to the GitHub repository: `https://github.com/janisgra/RTP-T4-SoSe2026.git`

Literatur

[1] DIN Deutsches Institut für Normung e. V. *Internationales elektrotechnisches wörterbuch – teil 351: Leittechnik (IEC 60050-351:2013)*. Norm. Berlin, Sep. 2014. URL: https://www.dinmedia.de/de/norm/din-iec-60050-351/208013542.

[2] Jan Lunze. *Regelungstechnik 1: Systemtheoretische Grundlagen, Analyse und Entwurf linearer Regelungssysteme*. 9. Aufl. Berlin, Heidelberg: Springer Vieweg, 2016.

[3] Torsten Reitmeier. *Internship in Control Engineering (RTP)*. Praktikumsversuche. 2025.