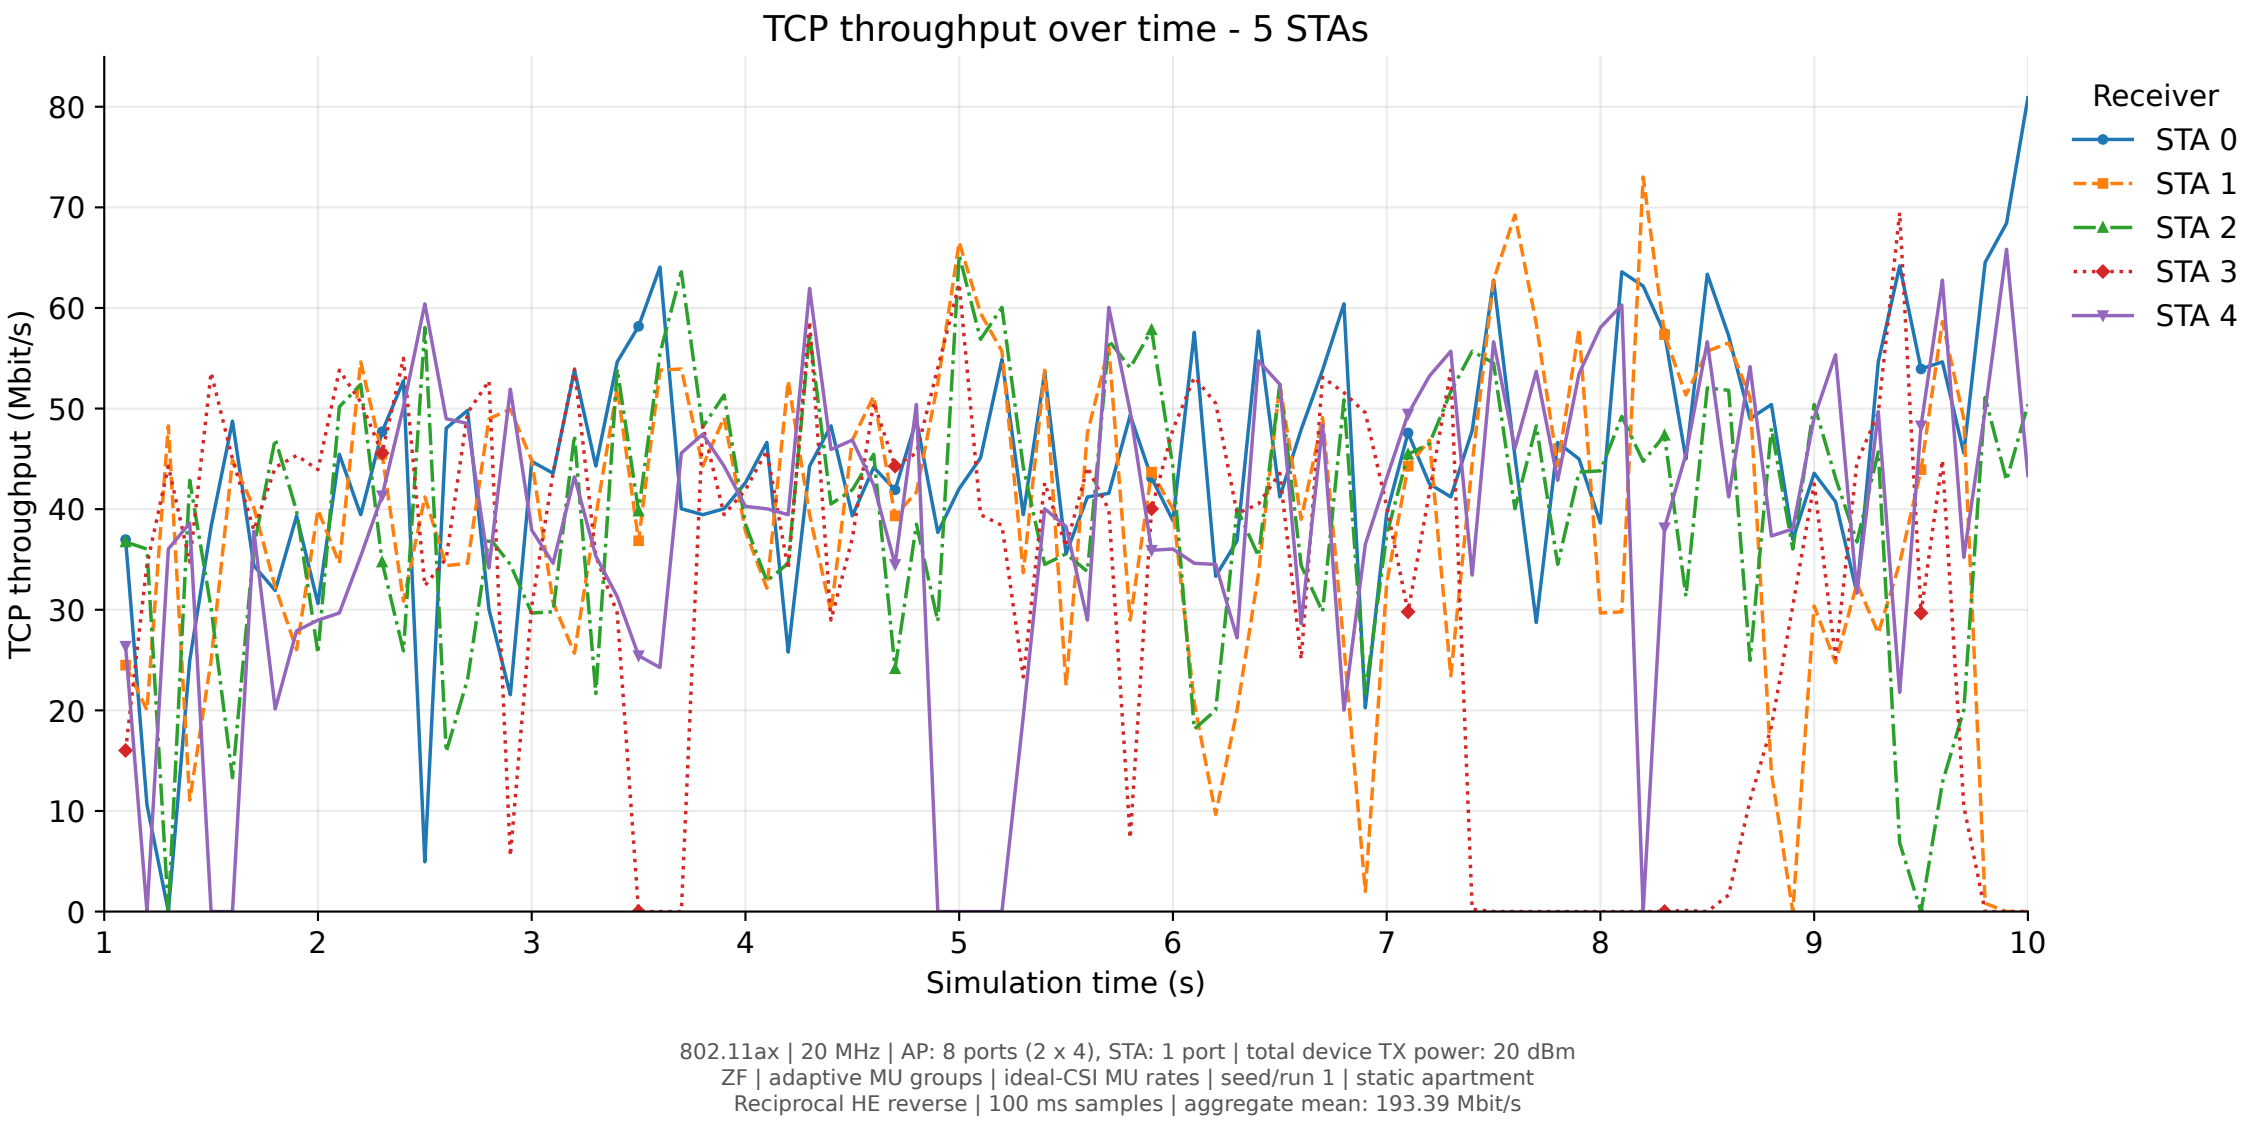
TCP throughput over time - 5 STAs
TCP throughput (Mbit/s)
Simulation time (s)
Receiver
STA 0
STA 1
STA 2
STA 3
STA 4
0
10
20
30
40
50
60
70
80
1
2
3
4
5
6
7
8
9
10
802.11ax | 20 MHz | AP: 8 ports (2 x 4), STA: 1 port | total device TX power: 20 dBm
ZF | adaptive MU groups | ideal-CSI MU rates | seed/run 1 | static apartment
Reciprocal HE reverse | 100 ms samples | aggregate mean: 193.39 Mbit/s