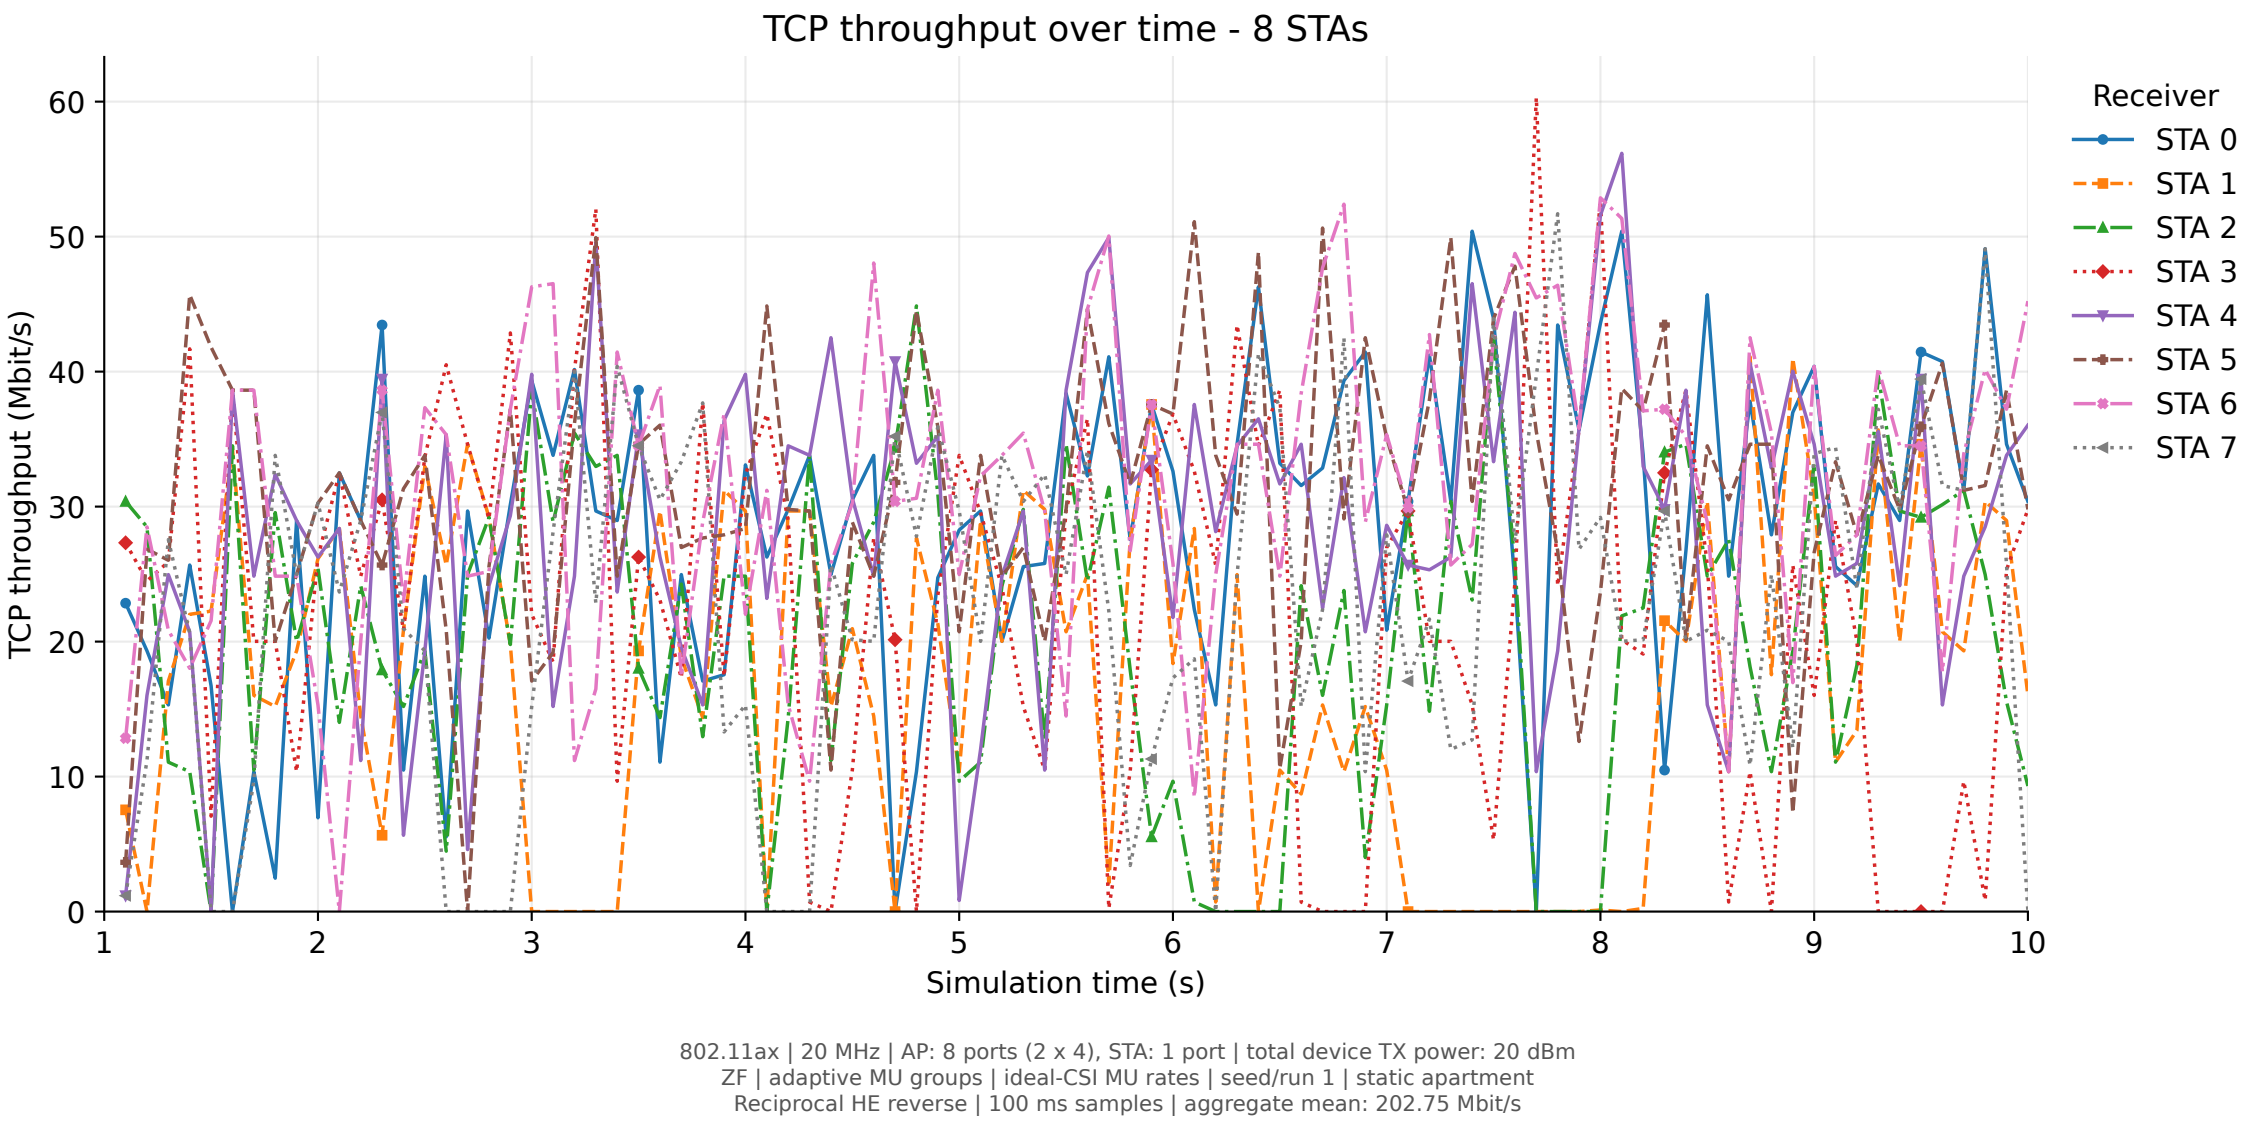
TCP throughput over time - 8 STAs
TCP throughput (Mbit/s)
Simulation time (s)
Receiver
STA 0
STA 1
STA 2
STA 3
STA 4
STA 5
STA 6
STA 7
802.11ax | 20 MHz | AP: 8 ports (2 x 4), STA: 1 port | total device TX power: 20 dBm
ZF | adaptive MU groups | ideal-CSI MU rates | seed/run 1 | static apartment
Reciprocal HE reverse | 100 ms samples | aggregate mean: 202.75 Mbit/s