

MODEL NAME	CENTRAL PIN(X)
------------	----------------






K36721A	φ 2.0mm(WITH SLOT)
---------	--------------------

K36721B	φ 2.5mm(WITH SLOT)
---------	--------------------

General specifications

Rating	: D.C. 30V 0.3A
Contact R.[max]	16V 2A
Insulation R.[min]	: D.C. 5V 1A 100mΩ
Withstand VOL.	: D.C. 500V 100MΩ
Connection force	: A.C. 500V 1minute
disconnection force	: 0.3 - 3Kgf
Life cycle[max]	: 0.3 - 1.5Kgf
	: 5,000 CYCLES

SCHEMATIC

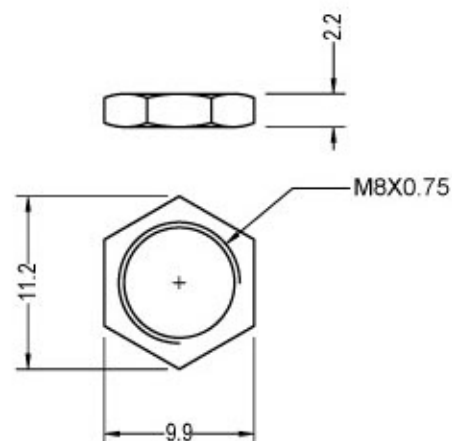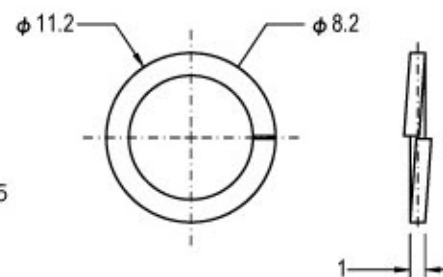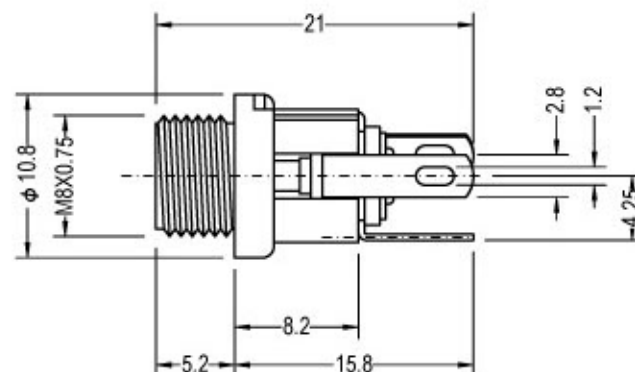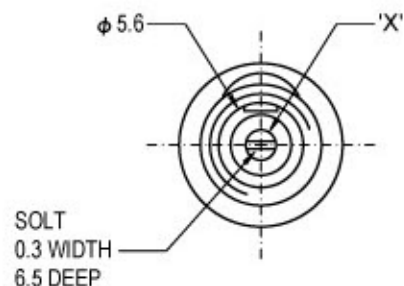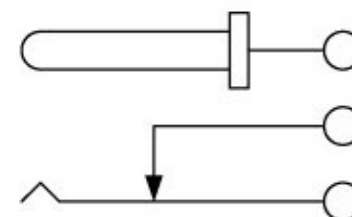

MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	QTY	FINISH
1	PLUG PIN	BRASS	1	Ni PLATED
2	SOCKET	BRASS	1	Ni PLATED
3	WASHER	HARD PAPER	2	RED
4	CASE	POM	1	BLACK
5	SPRING TERMINAL	PBS STRIP	1	Ag PLATED OVER Ni PLATED
6	TERMINAL	BRASS STRIP	1	Ag PLATED OVER Ni PLATED
7	TERMINAL	BRASS STRIP	1	Ag PLATED OVER Ni PLATED

Shallin Electronics Co., Ltd.

比例 SCALE 1 : 2

單位 DIMENSION m m

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE

UP TO 10 ±0.3

ABOVE 10 TO 100 ±0.5

ABOVE 100 ±0.8

ANGULAR DIMENSIONS ±5°

品名 TITLE

D.C. POWER JACK

型號 MODEL

K36721A & B

繪圖
DRAWN

HSB

核准
APPROVED

HSB



版次
REVISION

日期
DATE

2009/02/10

2009/02/10