

Wind Farm Layout Optimization Case Studies 3 & 4

IEA Task 37 on System Engineering in Wind Energy

Nicholas F. Baker, Andrew P. J. Stanley, and Andrew Ning

Brigham Young University, Provo, Utah, USA

Katherine Dykes

Technical University of Denmark, Kongens Lyngby, Copenhagen, Denmark

June 4, 2019

1 Introduction

Two major factors that affect wind farm layout optimization are 1) the optimization method and 2) the wake model. We have thus far conducted [two case studies](#) to analyze differences in these variables, this document defines a third and fourth case study to further research these factors when given a more realistic wind farm boundary and wind resource. Case study 3 (cs3) presents a scenario with a concave boundary. Case study 4 (cs4) presents a scenario with boundaries that are discontinuous and contain concavities. For cs3 a wake model is provided, participants need only optimize turbine locations. For cs4 users are free to choose both optimization approach and wake model.

Participants will 1) optimize turbine locations to maximize annual energy production, 2) submit details regarding their optimization convergence history and methodology. After all submissions are received, participants of cs4 will be expected to perform a cross comparison of other participant solutions. Data will be consolidated, processed, and made available to all participants.

2 Problem Definition

Objective

The objective of each scenario is to maximize annual energy production (AEP), which we define simply as the expected value of aerodynamic power multiplied by the hours in a year. In other words:

$$AEP = 8760 \frac{\text{hrs}}{\text{yr}} \sum_{i=1}^n \sum_{j=1}^m f_i w_{i,j} P_{i,j}$$

where $P_{i,j}$ is the power produced for wind direction i at wind speed j , n is the number of wind directional bins, f_i is the corresponding wind direction probability, m is the number of wind speed bins for each direction, and $w_{i,j}$ is the probability each speed bin will occur at each direction. Participants are free to use any optimization method.

Variables

The final reported designs will be in terms of the (x, y) locations of each turbine, although participants are free to parameterize the turbine positions using any design variables they choose (e.g., pre-selected grid locations, grid spacing parameters, etc.). Note that every turbine is identical and defined below in [Parameters](#).

Constraints

In case studies 1 and 2, all farm boundaries were circular. To make cs3 and cs4 more realistic, all boundaries are non-uniform. The cs3 and cs4 boundaries are based on the Borselle III and IV wind farms, our version is depicted graphically in [Figure 1](#). The coordinates for the boundary vertices are given in `iea37-boundary-cs3.yaml` and `iea37-boundary-cs4.yaml`. All turbine hub coordinates must remain on or within these boundaries. The turbines are further constrained such that no hub can be less than two rotor diameters from any other hub, and for these farms scenarios all hub heights (z values) will be the same.

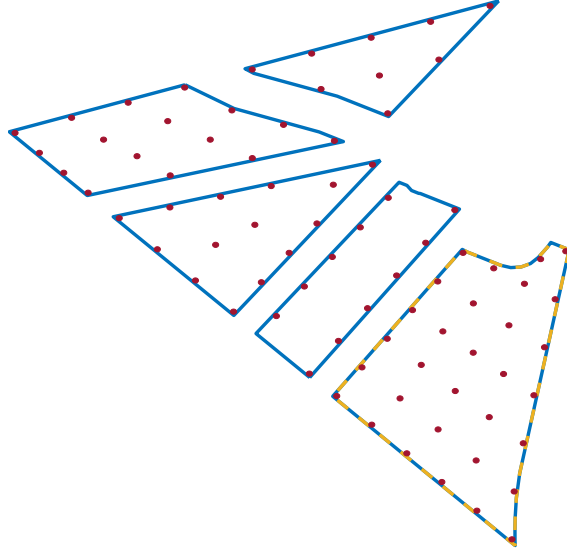


Figure 1: The wind farm boundary for cs3 (outlined in yellow) and cs4 (outlined in blue). A provided baseline turbine layout for cs4 is overlaid in red, with rotor radii to scale.

Parameters

The wind turbine is the IEA37 10 MW offshore reference turbine [1] with the following characteristics:

Rotor Diameter	198	m
Hub Height	119	m
Turbine Rating	10	MW
Cut-In Wind Speed	4	m/s
Rated Wind Speed	11	m/s
Cut-Out Wind Speed	25	m/s

All turbine data are also contained in the enclosed `iea37-10mw.yaml`. The power curve is defined as:

$$P(V) = \begin{cases} 0 & V < V_{cut-in} \\ P_{rated} \cdot \left(\frac{V - V_{cut-in}}{V_{rated} - V_{cut-in}} \right)^3 & V_{cut-in} \leq V < V_{rated} \\ P_{rated} & V_{rated} \leq V < V_{cut-out} \\ 0 & V \geq V_{cut-out} \end{cases}$$

For cs3 and cs4, the supplied wind resource is binned over both wind direction and wind speed. We supply a high number of frequency probabilities associated for each wind direction (20 values), and frequency probabilities associated with each wind speed's occurrence at each direction (20 x 20 = 400 values). This is more data than needed for AEP convergence. Participants are free to use any level of discretization or sampling strategy they prefer during the optimization (though final results will be compared using all 20 x 20 bins). This data is included in `iea37-windrose-cs3.yaml`, which will be used for both cs3 and cs4. Figure 2 gives a graphical representation of the binned wind direction frequencies, and the wind speed sampling for a single wind direction.

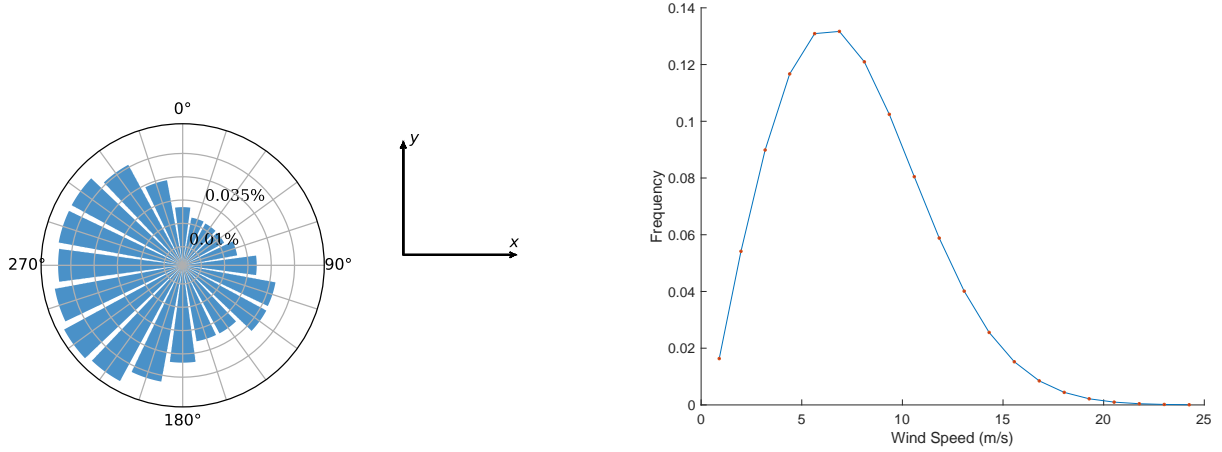


Figure 2: (left) Wind frequency distribution over the 20 bins for the windrose used in cs3 and cs4. (right) Wind speed frequency distribution at one of the wind directions (36°).

2.1 Case Study 3

This wind farm scenario consists of twenty-five (25) turbines with a boundary containing concavities. Participants will optimize the wind farm layout for maximum AEP with the provided Gaussian wake model, wind rose, turbine, and boundary. The wake model is supplied (coded in python) as `iea37-aepcalc.py`. Alterations to this implementation are permitted, as long as the governing physics equations are not altered. Participants may use other programming languages, but must use the same physics equations. To aid with this, the relevant equations are defined in a separate document (`iea37-wakemodel.pdf`), and baseline wind farm layouts with corresponding AEP values are provided in the `iea37-ex-opt#.yaml` files to verify implementations.

2.2 Case Study 4

This scenario consists of eighty-one (81) turbines with a boundary containing concavities and discontinuities. The user is free to choose both the optimization algorithm and wake model. This scenario contains discrete boundary regions. The number of turbines in a given boundary region can be changed as long as the total number of turbines is fixed. In other words, the participant or their optimization algorithm is free to move all eighty-one turbines between the five boundary regions.

3 Reporting and Evaluation

3.1 Baseline Layouts

Baseline turbine layouts for both case studies are supplied. These are provided in part to give examples of our precise reporting format. They are called `iea37-ex-opt3.yaml`, `iea37-ex-opt4.yaml`, and `iea37-ex-log3.yaml`. Like the example layouts provided for case studies 1 and 2, these baseline layouts are also meant to provide a reasonable minimum output against which results can be measured. Participants are not required to use the baseline layouts as starting points for their optimizations, though they are permitted to do so.

3.2 Reporting

Submissions must adhere to the `.yaml` format in order to enable easy and fast analysis of participant results. You will submit two (2) files per case study: one with your optimized turbine layout, the second a log of

your optimization convergence data. Your submitted files should be named:

```
iea37-yourname-opt#.yaml  
iea37-yourname-log#.yaml
```

Where “yourname” is your personal or organizational name, all lowercase with no spaces or punctuation, -opt#.yaml describes the (x,y) coordinates for your optimal turbine layout, -log#.yaml contains information regarding your hardware and optimization algorithm’s performance, and “#” is the case study number of the submission (i.e. “-opt3.yaml” contains optimized results for cs3).

Of note, we require participants to log target function evaluations for **every** function call during the optimization process. As shown in the example log given in `iea37-ex-log3.yaml`, participants must report both: (1) number of total target function calls, and (2) AEP calculation at each chronological function call. To repeat, every call to the AEP calculation should be logged whether it is formally part of the optimization or not (e.g., each call in a finite difference estimate, each call in creating an initial population, etc.)

3.3 Evaluation

Evaluations for cs3 will be made using the wake model target function supplied in `iea37-aepcalc.py` and convergence data reported by each participant.

Because the participant wake models in cs4 are intended to differ, determining a “best” solution for cs4 is generally not possible. Evaluations will be made using a cross-comparison approach. Every participant will evaluate every other participant’s solutions using their own wake model(s). It is essential that the .yaml format is adhered to so that cross-comparisons are painless.

4 Participation

If interested (or potentially interested) in participating in either or both case studies send an email to [the primary author](#) so we can keep you informed of updates/deadlines, etc.

5 Enclosures

Files included with this document, needed for full participation in the case studies are:

- `iea37-10mw.yaml` - data for the reference turbine used in both cs3 and cs4
- `iea37-aepcalc.py` - target AEP calculator using a simplified Gaussian wake model
- `iea37-boundary-cs3.yaml` - the vertices for cs3’s wind farm’s boundary
- `iea37-boundary-cs4.yaml` - the vertices for cs4’s wind farm’s boundary
- `iea37-ex-log3.yaml` - example of optimization results, denoting timing and iteration analysis
- `iea37-ex-opt3.yaml` - baseline layout for cs3, template for your submitted optimal turbine layout
- `iea37-ex-opt4.yaml` - baseline layout for cs4
- `iea37-wakemodel.pdf` - description of the AEP algorithm used in cs3
- `iea37-windrose-cs3.yaml` - 20 directional bins with 20 speed probabilities, for both cs3 and cs4

References

- [1] Bortolotti, P., Dykes, K., Merz, K., Sethuraman, L., and Zahle, F., “IEA Wind Task 37 on System Engineering in Wind Energy, WP2 - Reference Wind Turbines,” Tech. rep., National Renewable Energy Laboratory (NREL), Golden, CO., May 2018.