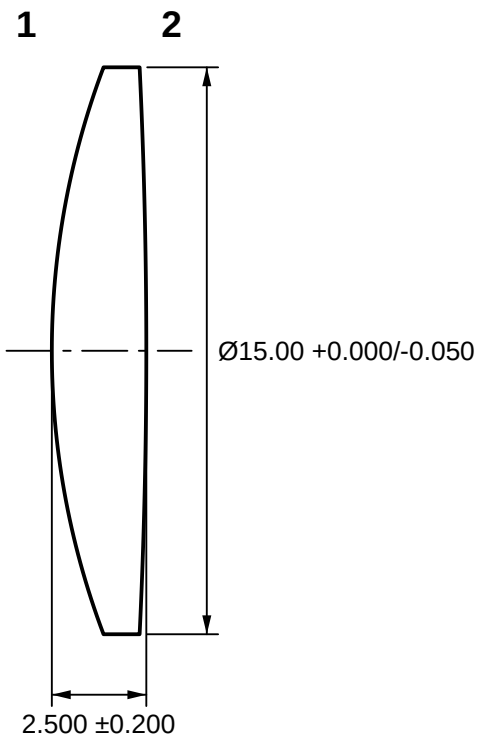

NOTES:

1. INTERPRET DRAWING PER ASME Y14.18 AND ASME Y14.5. DIMENSIONS IN MILLIMETERS.
2. MATERIAL: N-SK16 (SCHOTT) OR EQUIVALENT, nd = 1.62041 ± 0.0010, vd = 60.32 ± 0.8%.
3. POWER AND IRREGULARITY IN FRINGES AT 632.8 NM OVER THE CLEAR APERTURE.
4. SURFACE QUALITY 60-40 PER MIL-PRF-13830B OVER THE CLEAR APERTURE.
5. WEDGE: EDGE THICKNESS DIFFERENCE 0.0335 MAX (BEAM DEVIATION 4.77' MAX). SURFACE TILT AS TABLE, REFERRED TO DATUM AXIS OF THE OUTSIDE DIAMETER.
6. PROTECTIVE BEVEL 0.3-0.6 FACE WIDTH X 45°.
7. COATING: SURFACE 1 NONE; SURFACE 2 NONE.
8. EDGE THICKNESS 0.96 REF.
9. IN ITS MOUNT (ASSEMBLY DRAWING): DECENTER X ±0.08 MM, DECENTER Y ±0.08 MM, TILT X ±0.12°, TILT Y ±0.12°.

SURF	RADIUS	CA Ø	POWER	IRREG	TILT	SURF QUAL
1	21.249 ±0.15 CX	14.00	-	1 FR	6'	60-40
2	158.730 ±3 CX	14.00	-	1.2 FR	4.8'	60-40

TITLE	**LENS 1-2**
DRAWING	OPT-01
MATERIAL	N-SK16
SCALE	5:1 UNITS mm SHEET 1/1
STANDARD	ASME Y14.18 / MIL-PRF-13830B
PROJECT	cooke_triplet
DRAWN	2026-10-14

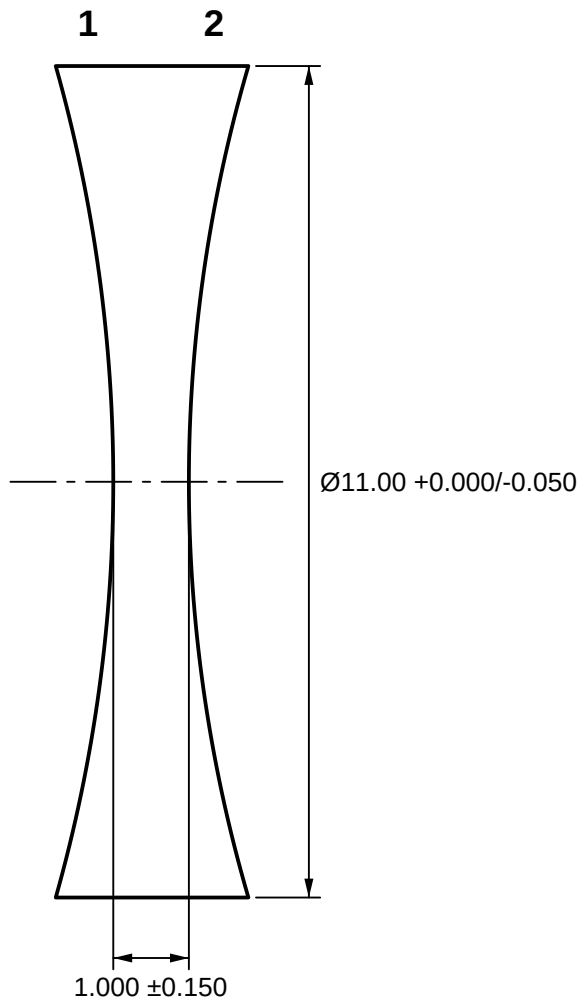

NOTES:

1. INTERPRET DRAWING PER ASME Y14.18 AND ASME Y14.5. DIMENSIONS IN MILLIMETERS.
2. MATERIAL: F2 (SCHOTT) OR EQUIVALENT, nd = 1.62004 ± 0.0010, vd = 36.37 ± 0.8%.
3. POWER AND IRREGULARITY IN FRINGES AT 632.8 NM OVER THE CLEAR APERTURE.
4. SURFACE QUALITY 60-40 PER MIL-PRF-13830B OVER THE CLEAR APERTURE.
5. WEDGE: EDGE THICKNESS DIFFERENCE 0.0181 MAX (BEAM DEVIATION 3.51' MAX). SURFACE TILT AS TABLE, REFERRED TO DATUM AXIS OF THE OUTSIDE DIAMETER.
6. PROTECTIVE BEVEL 0.3-0.6 FACE WIDTH X 45°.
7. COATING: SURFACE 1 NONE; SURFACE 2 NONE.
8. EDGE THICKNESS 2.55 REF.
9. IN ITS MOUNT (ASSEMBLY DRAWING): DECENTER X ±0.03 MM, DECENTER Y ±0.03 MM, TILT X ±0.1°, TILT Y ±0.1°.

SURF	RADIUS	CA Ø	POWER	IRREG	TILT	SURF QUAL
1	20.251 CC	10.00	8 FR	1.5 FR	3'	60-40
2	19.600 ±0.15 CC	10.00	-	2 FR	4.8'	60-40

TITLE	**LENS 3-4**
DRAWING	OPT-02
MATERIAL	F2
SCALE	10:1 UNITS mm SHEET 1/1
STANDARD	ASME Y14.18 / MIL-PRF-13830B
PROJECT	cooke_triplet
DRAWN	2026-10-14

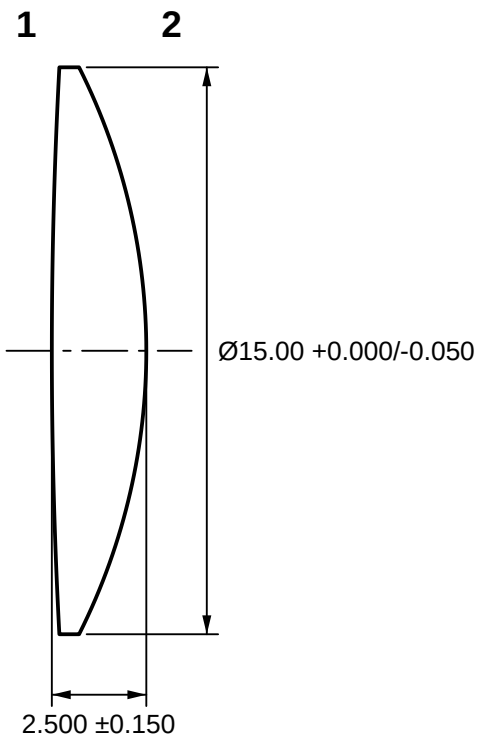

NOTES:

1. INTERPRET DRAWING PER ASME Y14.18 AND ASME Y14.5. DIMENSIONS IN MILLIMETERS.
2. MATERIAL: N-SK16 (SCHOTT) OR EQUIVALENT, nd = 1.62041 ± 0.0010, vd = 60.32 ± 0.8%.
3. POWER AND IRREGULARITY IN FRINGES AT 632.8 NM OVER THE CLEAR APERTURE.
4. SURFACE QUALITY 60-40 PER MIL-PRF-13830B OVER THE CLEAR APERTURE.
5. WEDGE: EDGE THICKNESS DIFFERENCE 0.0305 MAX (BEAM DEVIATION 4.34' MAX). SURFACE TILT AS TABLE, REFERRED TO DATUM AXIS OF THE OUTSIDE DIAMETER.
6. PROTECTIVE BEVEL 0.3-0.6 FACE WIDTH X 45°.
7. COATING: SURFACE 1 NONE; SURFACE 2 NONE.
8. EDGE THICKNESS 0.52 REF.
9. IN ITS MOUNT (ASSEMBLY DRAWING): DECENTER X ±0.04 MM, DECENTER Y ±0.04 MM, TILT X ±0.12°, TILT Y ±0.12°.

SURF	RADIUS	CA Ø	POWER	IRREG	TILT	SURF QUAL
1	141.243 ±10 CX	14.00	-	4 FR	6'	60-40
2	16.700 ±0.04 CX	14.00	-	2.5 FR	3.6'	60-40

TITLE	**LENS 6-7**
DRAWING	OPT-03
MATERIAL	N-SK16
SCALE	5:1 UNITS mm SHEET 1/1
STANDARD	ASME Y14.18 / MIL-PRF-13830B
PROJECT	cooke_triplet
DRAWN	2026-10-14