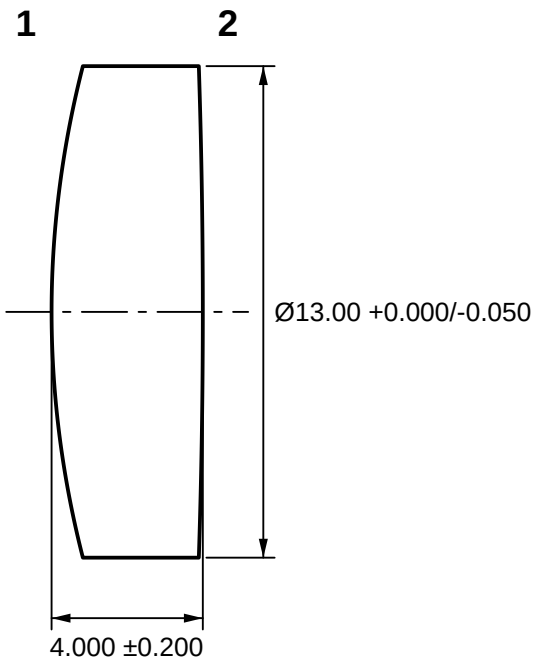

Surface 1 sag			
h	**z**	**±dz µm**	**±ds mrad**
0.00	0.0000	0.00	0.000
1.00	0.0195	0.43	0.866
2.00	0.0780	1.72	1.708
3.00	0.1757	3.83	2.501
4.00	0.3126	6.70	3.221
5.00	0.4889	10.24	4.186
6.00	0.7048	14.35	5.402

Left surface	**Material specification**	**Right surface**
R 25.641 ±0.5 CX (asph.)	N-BK7 (SCHOTT)	R 200.000 ±20 CX
Øe 12.00	nd = 1.51680 ± 0.0010	Øe 12.00
Prot. chamfer 0.3-0.6	vd = 64.17 ± 0.8 %	Prot. chamfer 0.3-0.6
3/-(1.5/0.5)	0/20	3/-(1.5)
4/4.8'(0.100)	1/3x0.16	4/4.8'
5/3x0.16	2/1;1	5/3x0.16
Coating: -		Coating: -

Indications to ISO 10110. Dimensions in mm. 3/ in fringes at lambda = 632.8 nm.
Edge thickness 3.07 (reference). 4/ tilt referred to the datum axis of the cylinder.
Surface 1 aspheric: $z = (h^2/R)/(1 + \sqrt{1 - (1+k)h^2/R^2}) + \sum A_i h^i$, k = -0.550000 ±0.005, A4 = -1.2E-06.
Sag tables: z from the vertex along the axis, positive to the right. ±dz and ±ds are the most the surface's power and irregularity tolerances move the sag and tilt the surface at that height.
In its mount (assembly drawing): decenter x ±0.2 mm, decenter y ±0.2 mm, tilt x ±0.2°, tilt y ±0.2°.

TITLE	**LENS 1-2**
DRAWING	OPT-01
MATERIAL	N-BK7
SCALE	5:1 UNITS mm SHEET 1/1
STANDARD	ISO 10110
PROJECT	aspheric_singlet
DRAWN	2026-10-15