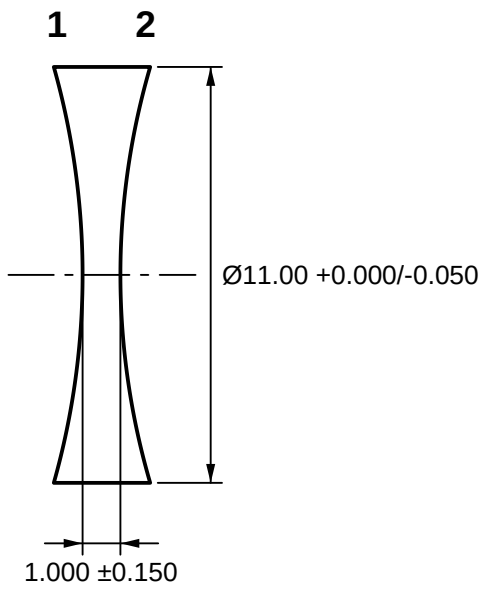

Left surface	Material specification	Right surface
R 20.251 CC	F2 (SCHOTT)	R 19.600 ±0.15 CC
Øe 10.00	nd = 1.62004 ± 0.0010	Øe 10.00
Prot. chamfer 0.3-0.6	vd = 36.37 ± 0.8 %	Prot. chamfer 0.3-0.6
3/8(1.5)	0/20	3/-(2)
4/3'	1/3x0.16	4/4.8'
5/3x0.16	2/1;1	5/3x0.16
Coating: -		Coating: -

Indications to ISO 10110. Dimensions in mm. 3/ in fringes at lambda = 632.8 nm.
Edge thickness 2.55 (reference). 4/ tilt referred to the datum axis of the cylinder.
In its mount (assembly drawing): decenter x ±0.03 mm, decenter y ±0.03 mm, tilt x ±0.1°, tilt y ±0.1°.

TITLE	**LENS 3-4**
DRAWING	OPT-02
MATERIAL	F2
SCALE	5:1 UNITS mm SHEET 1/1
STANDARD	ISO 10110
PROJECT	cooke_triplet
DRAWN	2026-10-14