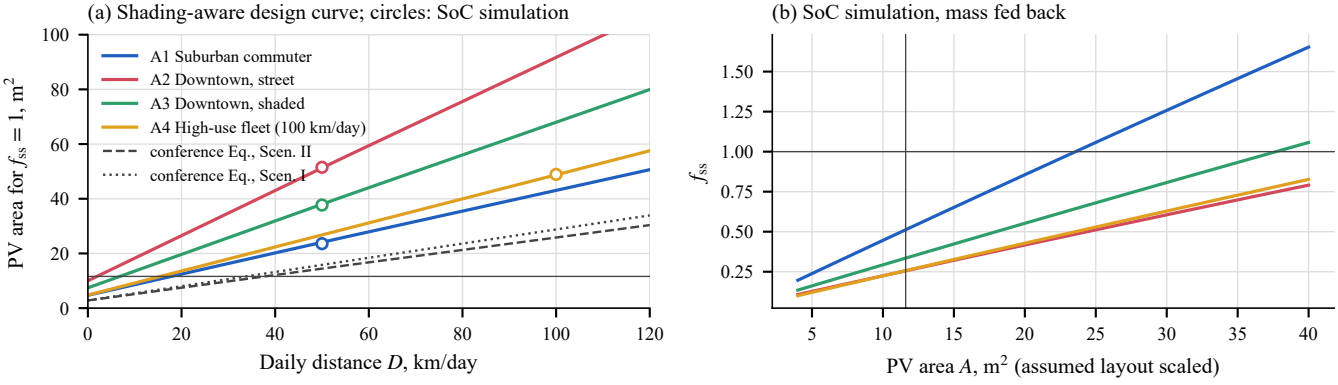
(a) Shading-aware design curve; circles: SoC simulation
A1 Suburban commuter
A2 Downtown, street
A3 Downtown, shaded
A4 High-use fleet (100 km/day)
conference Eq., Scen. II
conference Eq., Scen. I
PV area for $f_{ss} = 1$, m^2
Daily distance D, km/day
0
20
40
60
80
100
120
(b) SoC simulation, mass fed back
f_{ss}
0.25
0.50
0.75
1.00
1.25
1.50
5
10
15
20
25
30
35
40
PV area A, m^2 (assumed layout scaled)