

FPGA

Stimulus & Sampling Pulse Timing Generation

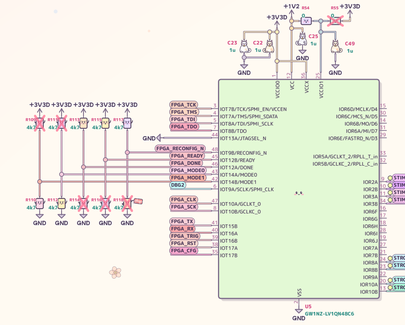


Pulse Amplifier

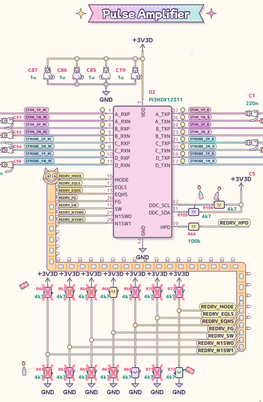


Signal Splitter

Couples incident stimulus into mesh, reflections into sampler

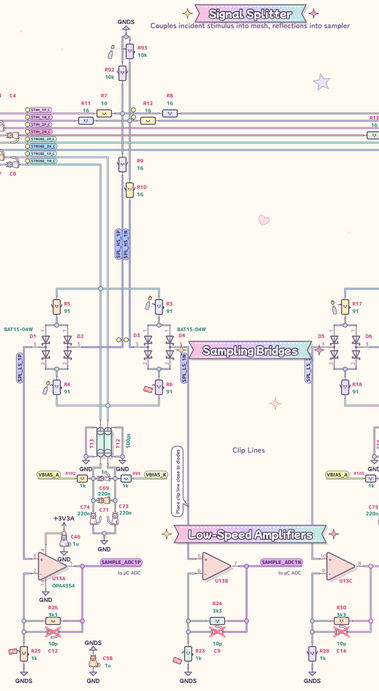


L/R Connector Mux




Termination Mux & Crossbar


Selects termination, and flips mesh send/return

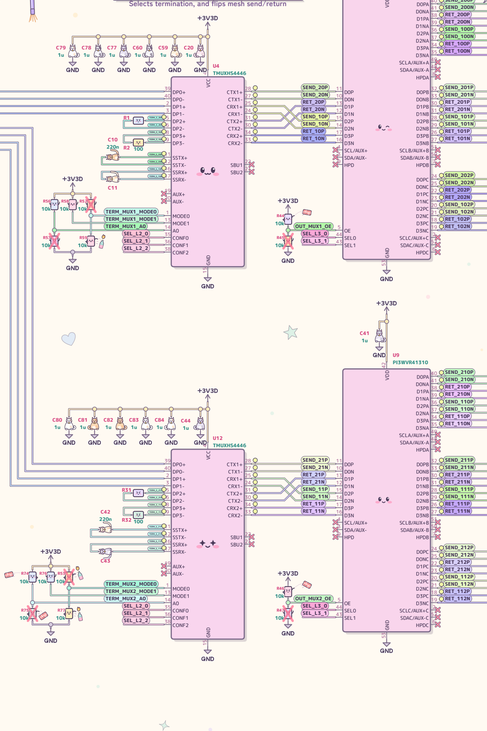


Sub-Mesh Output Mux

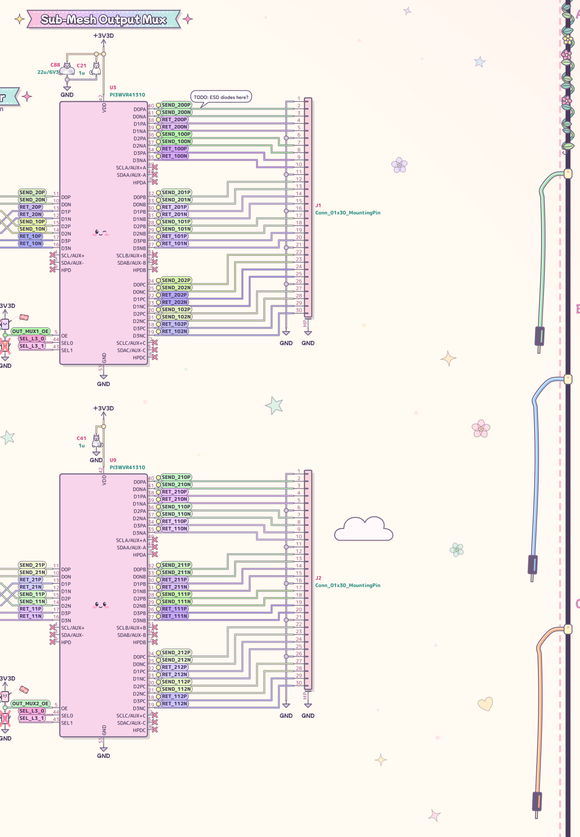


Microcontroller

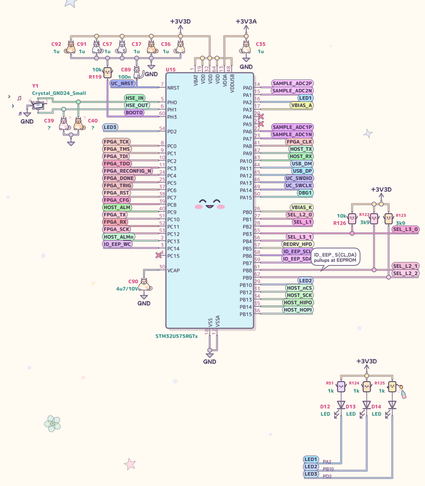


Debug USB



Debug connector




PiHAT+ Connector

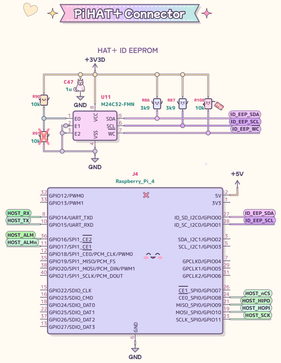

Power Supplies

5V input, outputs: 3V3D (digital), 3V3A (analog, low noise), 1V8 (digital), 1V2 (digital)

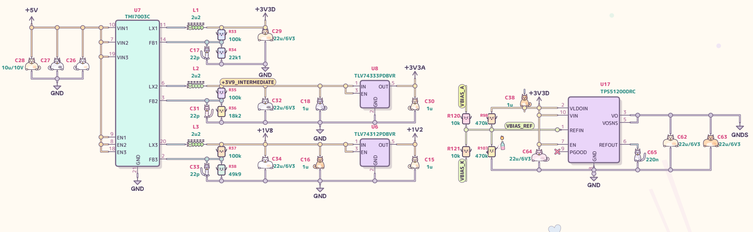

♡ cast of characters ♡



capacitors
more capacitance, more chonk
(the wires go in one end and out the other)

10pF 1nF 100nF 1µF 4µ7F 22µF

resistor
grumpy, throws bricks
(and the odd molotov)

inductor
a very hungry caterpillar

crystal
dances at its own frequency ♪

bus
a very long cat
carries lots of signals



✦ センサー回路図 ✦

yanartas-pillowbox-sensors

~ the pillowbox sensor board ~

sheet ♡ 1

paper A1 · drawn with love ♪