

FPGA

Stimulus & Sampling Pulse Timing Generation

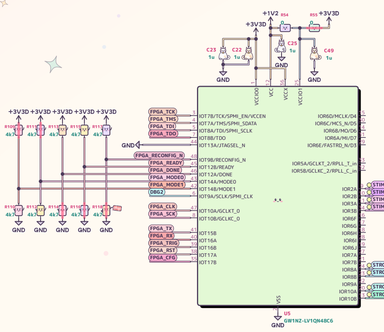


Pulse Amplifier

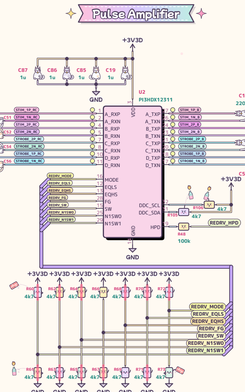


Signal Splitter

Couples incident stimulus into mesh, reflections into sampler

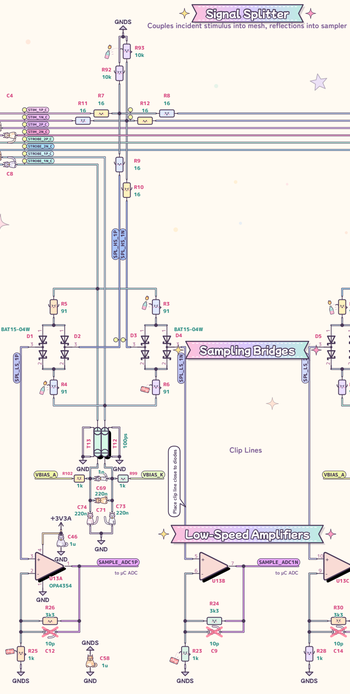


Sampling Bridges

Low-Speed Amplifiers

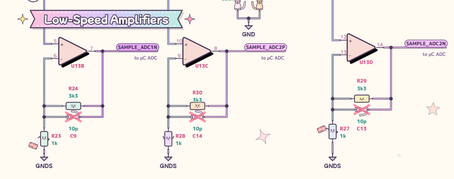


L/R Connector Mux




Termination Mux & Crossbar

Selects termination, and flips mesh send/return

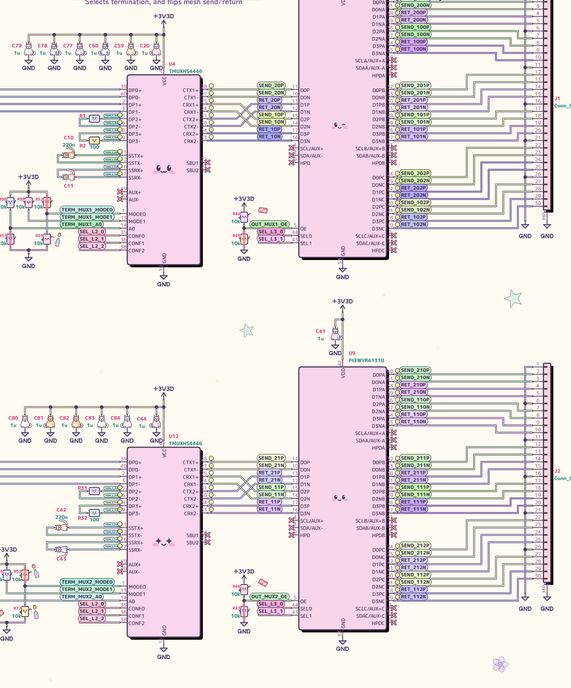


Sub-Mesh Output Mux


Microcontroller

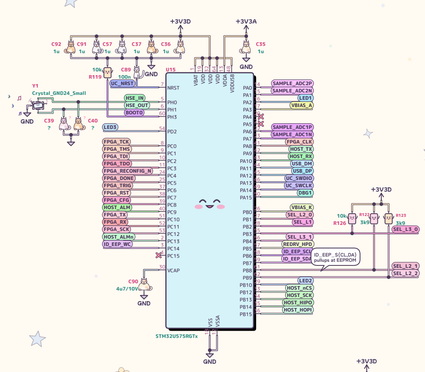


Debug USB



Debug connector




PiHAT+ Connector

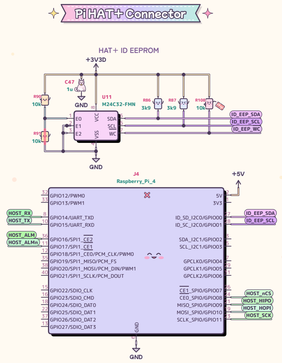

Power Supplies

5V input, outputs: 3V3D (digital), 3V3A (analog, low noise), 1V8 (digital), 1V2 (digital)

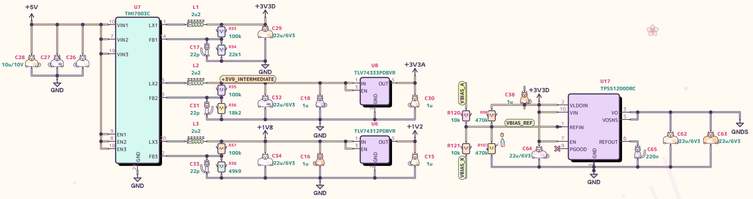

♡ cast of characters ♡



10pF 1nF 100nF 1µF 4µ7F 22µF

capacitors

more capacitance, more chonk

(the wires go in one end and out the other)

resistor

grumpy, throws bricks

(and the odd molotov)

ferrite bead

a very hungry inductor

crystal

dances at its own frequency ♪



✦ センサー回路図 ✦

yanartas-pillowbox-sensors

~ the pillowbox sensor board ~

sheet ♡ 1

paper A1 · drawn with love ♪