## B-Series Electric Vibrators

## **FEATURES:**

- UL and CSA Listed.
- 50 Hz / 60 Hz with full voltage ranges.
- Speed range 3450, 1750, 1170, 850 RPM.
- Centrifugal force output 70 lbs. to 16500 lbs.
- High temperature class H windings.
- TENV motor ensures long life.
- Water tight/dust tight.

## Specify Cougar for:Cost effective

- Cost effective solutions.
- Expert technical assistance.
- Complete service and support.

For the specifications on B-Series see our technical bulletins:


Single phase TB-B1-001a (Inch) or TB-B1-001b (Metric)

Three phase - 2 Pole TB-B3/2-001a (Inch) or TB-B3/2-001b (Metric)

Three phase - 4 Pole TB-B3/4-001a (Inch) or TB-B3/4-001b (Metric)

Three phase - 6 Pole TB-B3/6-001a (Inch) or TB-B3/6-001b (Metric)

Three phase - 8 Pole TB-B3/8-001a (Inch) or TB-B3/8-001b (Metric)

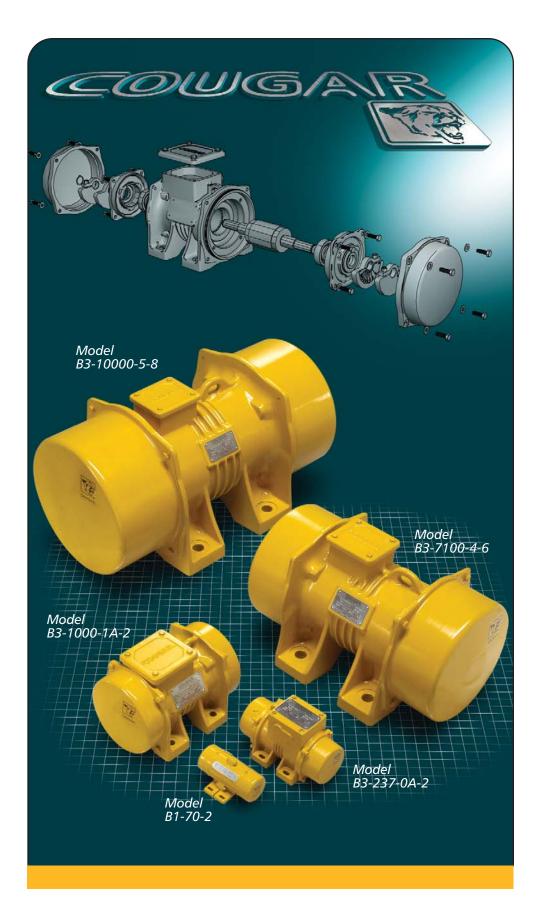



3600 Cougar Drive, Peru, Illinois 61354-9336 Toll Free: 800-262-2106 Phone: 815-224-1200 Fax: 815-224-1241