



- Models for any application 12/24 Volt Electric, Hydraulic or Pneumatic 80 to 3200 Pounds Force Output Made in America



#### Cougar's complete line of rugged, durable **Truck Vibrators are:**

- Sealed against dirt, dust, and water for long life in extreme conditions.
- Shielded, oversized, permanently lubricated ball bearings assure exceptional service life.
- Small size and weight with Highspeed, low-amp electric motors.
- Easy, low-cost installation
- Maximize vibration effectiveness -Truck Vibrators bolt to a mounting plate welded to the frame.

### Increase your productivity -

- Eliminate carry-back
  - More payload per cycle
  - Fewer cycles per job
- Fewer cycles mean:
  - Lower labor and fuel costs
- Reduced vehicle wearFaster dump times
- Material is more evenly distributed when spreading
- Eliminate bed cleanout time and personnel

### Reduce common causes of equipment damage -

- Eliminate strain on hydraulic components lowering half-full beds
- Stop moving material by:
  - Tailgate banging
  - Slamming the brakes"Popping" the clutch
- No need to clean out the bed with a backhoe leaving more places for material to stick



# Reduce operator risks associated with dumping and spreading cohesive materials -

- Keep the operator safe inside the cab not on the bed of the truck
  Facilitate material flow to minimize
- Facilitate material flow to minimize possible "tip over" during spreading or dumping.



## Selection Guide

| Model<br>Number                   | Body<br>Length<br>(ft) | Body<br>Capacity<br>(yd³) | Body Style                              |
|-----------------------------------|------------------------|---------------------------|---|
| DC-3200<br>NHD-110                | 15-40                  | 15-30                     | Tandems/Live Bottoms/Multi-axles to 40' |
| DC-3200<br>5016<br>NP-55<br>NP-75 | 10-15                  | 8-16                      | Rear Dump                               |
| DC-2500<br>DC-1600                | 9-10                   | 5-10                      | Rear<br>Dump                            |
| DC-2500<br>DC-1600                | 10-15                  | 7-10                      | Spreader<br>Body                        |
| DC-1600<br>DC-1000                | 8-9                    | 2-5                       | Rear<br>Dump                            |
| DC-1000<br>DC1-400                | 7-8                    | 1-2                       | Concrete Pumps Bins Hoppers Chutes      |
| DC-80<br>DC-200                   | NA                     | 1                         | Rear<br>Dump                            |

## Easy Operation



A simple push of the button activates the vibrator. Hold for a few seconds until the load begins to move.

### Installation Kit Included


Installation kits are shipped standard with the DC-1000 through the DC-3200. Each "DC" installation kit includes 25' of cable (40' w/ the DC-3200), mounting plate, bolts, washers, switch, solenoid, terminals, and installation instructions. Installation kits for the DC-80 and DC1-400 include mounting bolts and washers. Circuit breakers (optional) are recommended for all "DC" vibrators.


Pneumatic ring units NP-55 & NP-75 require a filter/regulator/lubricator in the air line.

Pneumatic piston unit 5016 requires a filter/regulator in the air line.



**Electric Installation** 

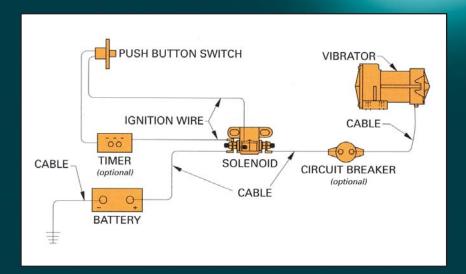

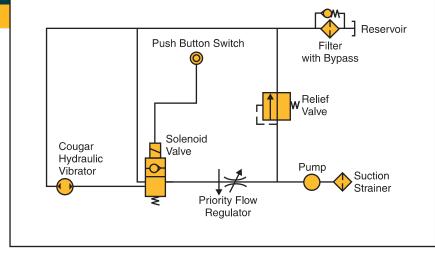

Hydraulic Installation

### **Optional Equipment**

- Cable (by the foot)
- Circuit breaker
- Timer

- Timer Enclosure
- Continuous duty kit (DC-80, DC1-400, DC-1000)



3600 Cougar Drive, Peru, Illinois 61354-9336 Toll Free: 800-262-2106 Phone: 815-224-1200 Fax: 815-224-1241

www.cougarindustries.com

Form SB-DC/HT-001