

3 (short)

A flexible inextensible cable spans 40 m between two fixed supports as shown in Fig. 3. The cable supports a uniformly distributed load of 1 kN per unit horizontal length and a vertical point load of 10 kN at B. If the dip at midspan is 1000 mm, calculate the dip at point B. [10]

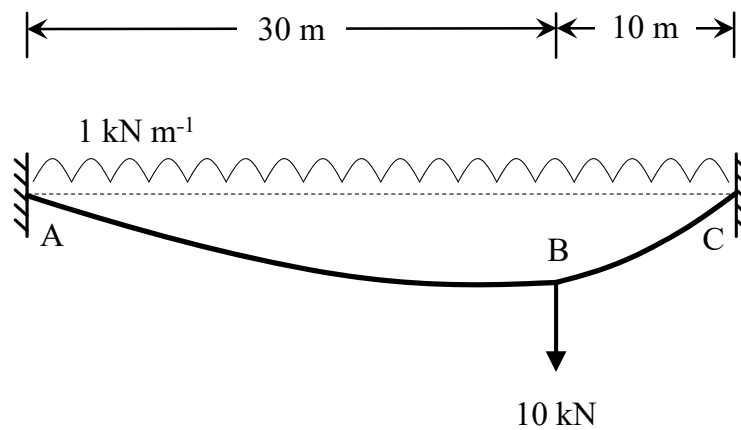


Fig. 3