

3 (short)

A glued laminated timber beam is shown in Fig. 3. The beam cross section is built up from 60 mm thick layers of timber, adhesively bonded together with a strong, stiff glue. Perfectly composite action of the cross-section may be assumed. If the beam is subjected to a vertical shear force of 50 kN, what is the maximum shear stress on the glue. [10]

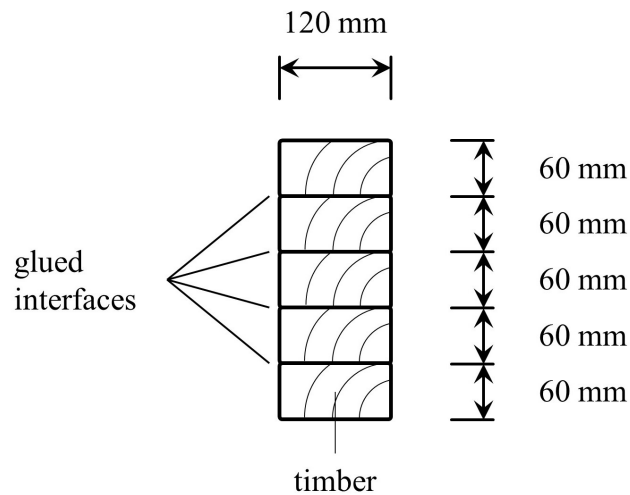


Fig. 3