



# PRODUCT CATALOGUE

SWIMMING POOL | FOUNTAIN TECHNOLOGY | LANDSCAPING & EQUIPMENTS | IRRIGATION & AUTOMOTIVE

# OUR CORE VALUE

Business for us is not just acquiring deals; business having great products, doing great engineering, and providing tremendous service to our customers.



Mr. Ramachandra  
Managing Director



Mrs. Prabhavathi  
Director

# OUR PROFILE

Rainbow Landscape Innovations India Pvt. Ltd. involved in structural, hydraulic and Technical design & implementation of Swimming Pools, Fountain Technology, Jacuzzi Pools, Landscape & Irrigation, Lake Management, Musical Fountains, Civil Infrastructure work, Bio Ponds & Aerators Play Equipments for the last 18 years. In order to expand our business and global approach, we are now a Private Limited Company.

Aesthetically and Technologically advanced Swimming Pool Designs are our basic strength. We are involved in Commercial and Residential pools. Each pool is designed and executed as per the requirement of our clients and architects. For more comfort and service we also design and execute Jacuzzi & Heating Pools.

Water bodies bring in peace and calmness in the living environment along with its aesthetic beauty. Our Water Fountains are designed to serve this very purpose. Strong in hydraulic designs, we design and recreate fountains to match every need of our customers.

With the depletion of water resources, it is advised for more efficient planning and usage for available water. Hence for our irrigation products we are glad to mention that we take utmost care in design and implementation of Landscape Irrigation design.

For all your Design , Consultancy and Implementation of your Turn Key Projects, we are at your service.

# CONTENTS

Sand filters	9 - 12
Filter media	13
Bio filtration system	14 - 16
Pump, Air blower & counter current	17
Abs pool fittings	18
Stainless steel pool fittings	19
Spa fittings	20
Maintenance accessories	21
Pool ladders	22-23
Under water lights	24
Uv clarifiers	25
Ozonators	26
Chemical dosing system	27
Water fall fittings & water curtain	28
Heating system	29 - 31
Valves	31 - 35
Swimming pool competition equipments	36
Life saving & inflatable equipments	37 - 38
Fountain nozzles	41
Geo Textile	43-44
Epdm pond liner	46
Pond aerators	48
Hydrocore air to water	50-51
Irrigation system	54- 58
Landscaping	60-62
Outdoor play ground equipment	63 - 64
Steam & sauna	66 - 68
Spa	69-73
Poolside loungers & Garden furniture	74 - 75
Swimming pool tiles	76

# Builders & Developers

- Sycon Pmc Projects  
Marasa Thirupathi Star Hotel  
Paramount Buildwell Mumbai  
Pristina Hotel Goa  
Earth Line Services  
Nambiar Builders  
Aditya Developers  
Ozone Group  
Adarsh Group  
Goan Real Estate and Construction  
Sreenidhi International Institute of Science and Technology  
InfoTech Group  
Chourasia Group  
Srinivas Developers  
Malaris Costruction Nagaland  
Pragathi Developers  
Bangalore International Airport  
Hyderabad Sudheer Reddy Residency  
Arvind Constructions Hyderabad  
CCCL Company Hyderabad  
GMR Group Bangalore & Hyderabad  
Karle Group  
Bagmane Group  
QVC Reality Bangalore  
Indian Gymkhana Club  
Ajmal Group  
Abhi Developers  
Dream Flower Resorts  
DRN Infrastructure  
DRN Hospitalities  
IOCL Projects  
Star worth Infrastructure  
Pastina Beach Resorts  
Hotel W (Goa)  
Ocean Park Residency - (Goa)  
Grand Hyatt  
Kaveri Seeds  
Kumar Builders  
Concorde Group  
Brigade Group  
L&T  
Dasari Builders  
Vaishnavi Group  
Divyasree  
Salarpuriya  
Indian Builders Corporation  
Purvankara  
IDEB  
ETA Constructions  
IVRCL Group  
Value Design Build  
RMZ  
HCL Technologies  
Century Group  
Hinduja Group  
Raksha Group  
Ahad Builders and Developers  
Astro Builders and Developers  
Ittina Developers  
MANA Properties and Developers  
Embassy Group  
Kims Group  
BGR Group  
Sridhar Chaithanya Residency  
Apollo Group  
Ace Constructions  
Reliance IT Park - Mumbai  
Pramodh Residency  
Ramesh Sundaramurthy (MPL)  
E Mudhra  
Indusgene Group  
Highraise Infrastructures  
Titan Group  
Nagaraj Residency  
Johnson Pool

OUR CLIENTS

# Architects


Terra Firma  
Dhruba Associates  
Site Concepts  
Integrated Design  
Sanjay Associates (Raino Associates)  
Design Milieu  
Total Environmental Services Pvt. Ltd  
Taib Landscape Architect  
ZTC International Landscape Solutions (P) Ltd  
Prabhu Goankar Landscape Architect Goa  
Sudheer Reddy Architect Hyderabad  
Ashely Architect Mumbai & Goa  
Sanjay Design Studio Architect & Interior Bangalore  
Gopal Bajaj Archiscape Landscape Architect  
Elements Design Studio Landscape Architect  
Malik Design Studio Landscape Architect  
Janakiram Associates Bangalore  
Kruthica Architect Hyderabad  
Ace Group Architect Bangalore  
Synergy Consultants Bangalore  
Sycon Pmc Consultant Bangalore  
Vinodh Architects  
Shiv Architects  
Prasanth Architects  
IM Design Centre  
BNA Architects  
Adithi Architects  
Anu Architects  
Nilima Architects  
Rahul Architects

Cubuism Architects  
Renuka Architects  
Rohith Architects  
Sabia Architects  
Site Concept international  
Shaji Architects  
Purple Ink Architects  
Sree Nandhan Architects  
Suraj Eco Space Architects  
Swetha Landscape Architects  
Venkat Hyderabad Architects  
Venugopal Architects  
Vivek Architects  
David Architects  
Diwakar Architects  
Sanjay Architects  
Lateral Architects Arjun  
Ashley Architects Goa  
Ashok Architects  
Chandramouli Architects  
Design Transit Architects  
Mind Cell Architects  
Gopinath Architects  
HR Line Architects  
KML Kiran Architects  
Mind space Architects  
Mystery Architects  
Mithun Architects

# Educational institutions

The Sreenidhi International School  
Crysails School  
Vibgyor High International School  
BGS International School  
Green Wood International School  
Sunrise International School

Doric Infra - Vibgyor School  
Florence School  
GPS International School  
Clarence High School  
Concord International School  
PSS Residential School

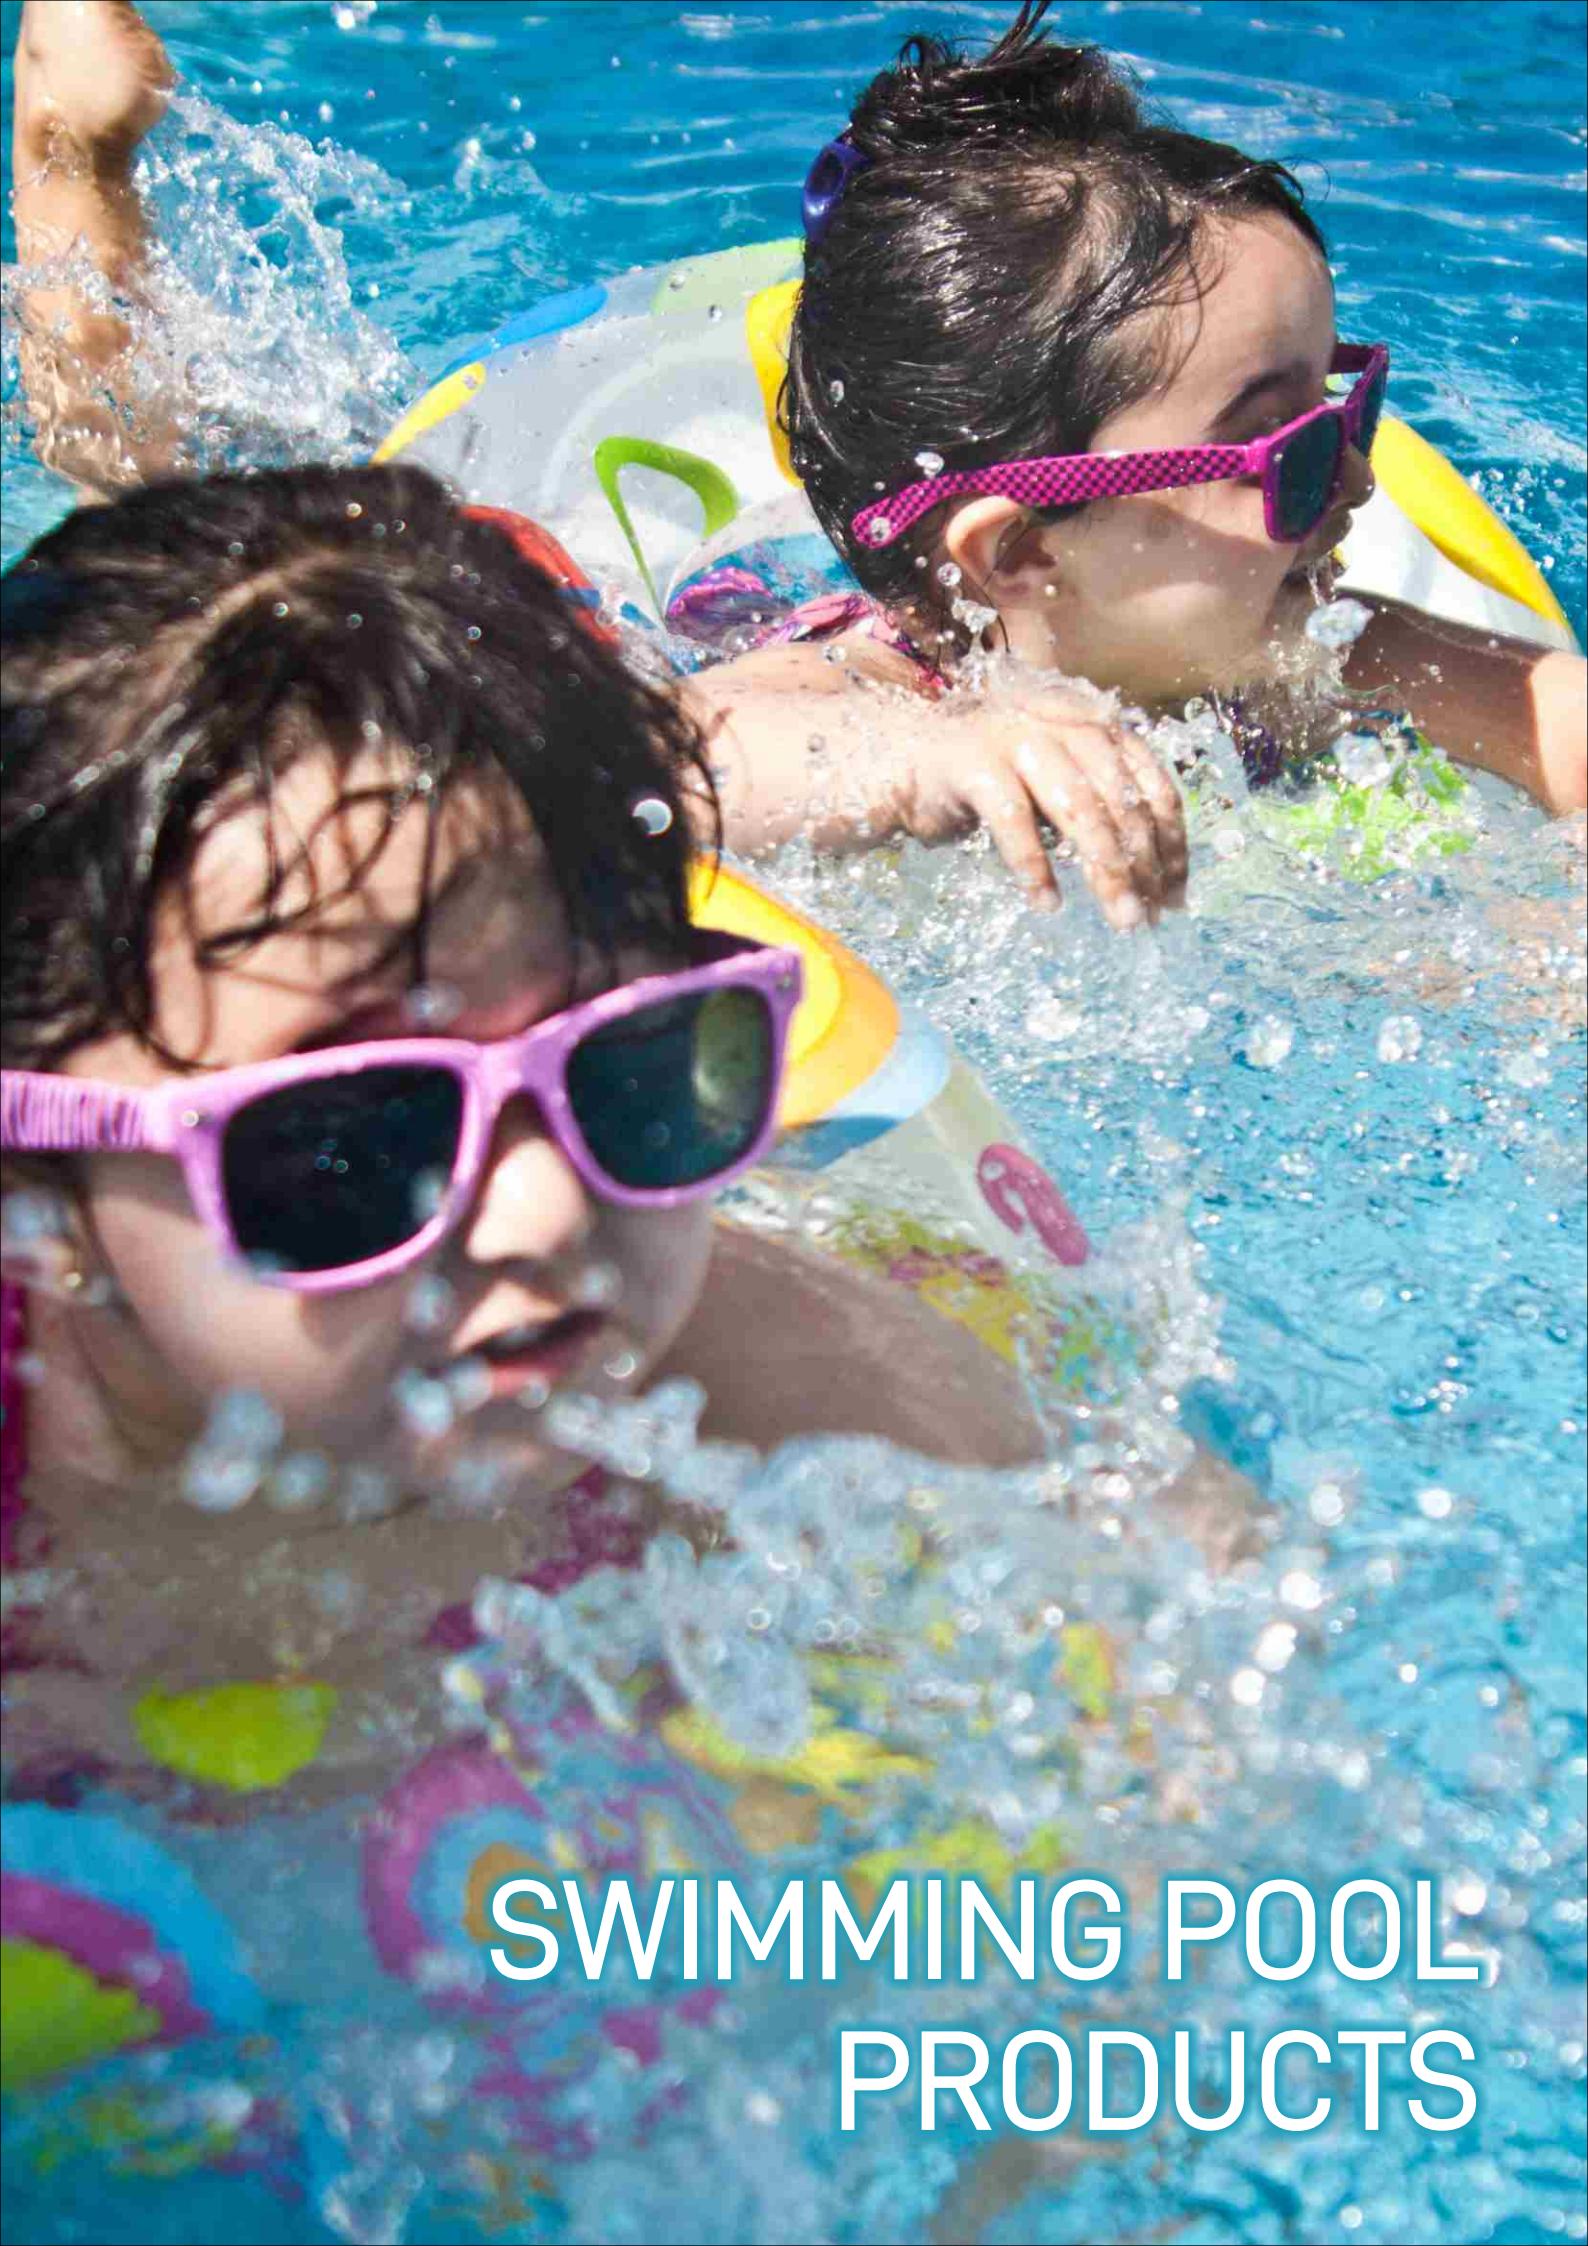

# SWIMMING POOL PRODUCTS

## Notes

## SIDE MOUNT SAND FILTER WITH MULTIPORT VALVE



Side-Mount Swimming Pool Sand Filters with Multiport Valve Series Anpow sand filter is the ideal equipment for swimming pool, sauna and SPA.

### Features and advantage - Tank

1. Voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof.
2. Uniquely designed distribution make a stable and even water flow to improve drainage system.
3. Easy to install, maintain free.
4. Outlet turbidity: Less 2FTU

Dia (mm)	Inch / Outlet (Inch)	Flow (m³/h)	Filtration Area(m²)	Sand Weight (kg)	Working Pre (kpa)
525	1.5	12	0.19	110	350
600	1.5	14	0.22	160	350
650	1.5	17	0.32	175	350
700	1.5	19	0.35	185	350
750	1.5	21	0.4	205	350
800	2	24	0.5	275	350
900	2	30	0.64	450	350
1050	2	38	0.88	935	350



Anpow brand top mount sand filter ( 2 inch)

## TOP MOUNT SAND FILTER WITH MULTIPORT VALVE

High strength Swimming Pool top mount Sand Filters Anpow brand top-mount sand filter is the ideal equipment for swimming pool, sauna and SPA.

### Features and advantage - Tank

1. Voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof.
2. Uniquely designed distribution make a stable and even water flow to improve drainage system.
3. Easy to install, maintain free.
4. Outlet turbidity: Less 2FTU

Dia (mm)	Inch / Outlet (Inch)	Flow (m³/h)	Filtration Area(m²)	Sand Weight (kg)	Working Pre (kpa)
400	1.5	8	0.13	60	350
450	1.5	10	0.16	80	350
525	1.5	12	0.19	105	350
600	1.5	14	0.22	160	350
650	1.5	17	0.32	175	350
700	2	19	0.35	185	350
750	2	21	0.4	205	350
800	2	24	0.5	275	350
900	2	30	0.64	450	350
1050	2	38	0.88	935	350



### Fiberglass side mount sand filter with valve system

Anpow brand sand filter have been using the latest pool filter technology which is suitable for many different weather conditions and have reached many different market standards. The filters are durable, anti-corrosive, UV-resistant and user-friendly. The sand filters are applicable for use in all types of pools such as in-ground pools, in-ground spas, as well as other water features.

#### Features and advantage - Tank

1. Voluble molding of fiber glass reinforced plastics, corrosion resistant, good abrasion resistance, deforming-proof.
2. Uniquely designed distribution make a stable and even water flow to improve drainage system.
3. Easy to install, maintain free.
4. Outlet turbidity: Less 2FTU
5. Working pre(kpa): 350

Dia (mm)	Inch / Outlet (Inch)	Flow (m³/h)	Filtration Area(m²)	Sand Weight (kg)	Working Pre (kpa)
1200	2.5	42	1.13	1050	350
1400	3	56	1.25	1240	350
1600	3	100	2.01	1590	350
1800	4	125	2.54	2550	350
2000	6	153	3.14	4125	350



### CARTRIDGE FILTER

High quality cartridge element for long life filtration, suitablefor spa tempratures. Complete with quality pressure gauge and 63mm water connections.



Code Number	Description
HCCF 25	High quality cartridge Filter & Base with 25 sq.ft 5.5m³/hr, 40/50mm solvent connections
HCCF 50	High quality cartridge Filter & Base with 50 sq.ft 11.4m³/hr, 40/50mm solvent connections
HCCF 75	High quality cartridge Filter & Base with 75 sq.ft 17.0m³/hr, 40/50mm solvent connections
HCCF 100	High quality cartridge Filter & Base with 100 sq.ft 22.9m³/hr, 50/63mm solvent connections
HCCF 150	High quality cartridge Filter & Base with 150 sq.ft 33.4m³/hr, 50/63mm solvent connections

## INTERACTIVE FILTER

The Integrative unit combined with filter, handrail, underwater light, more functions together. Even equipped with 11W constant thermal heater.



## MULTIPORT VALVES



Multi port valve to perform different functions in an hydraulic circuit: filtration, emptying, shut off, backwashing, circulation and rinsing of the filter. Its functional design, offers a wide range of possibilities of connection in any installation assuring a perfect sealing and easy operation. When designing and choosing appropriate materials for manufacturing the different Multiport valve components, extreme care has been taken for assuring minimum friction and resistance, maximum security and an attractive finish. Housing, cover and handle are made of ABS

### TOP MOUNT MULTI PORT VALVE



Code Number	Description
HCMPV150T	Multi port valve 1.5" Top Mounted
HCMPV200T	Multi port valve 2" Top Mounted

Size: 1/2", 2" and 3" Material: High impact ABS (white or black). Glass filled NORYL for high pressure applications (75 psi. operating pressure)

#### Features :

- Choice of socket or threaded (FIP) NPT, BSP or JIS threads
- Four piping variations including all open ports Two plugs will be supplied with all open port models

### SIDE MOUNT MULTI PORT VALVE



Code Number	Description
HCMPV150S	Multi port valve 1.5" Side Mounted
HCMPV200S	Multi port valve 2" Side Mounted
HCMPV250S	Multi port valve 2.5" Side Mounted
HCMPV250SW	Multi port valve 2.5" Side Mounted ( Waterco)



## AUTOMATIC MULTIPORT VALVE

Filter, backwash, rinse and waste Automatic Backwash – pressure sensitive (factory set @ 1.5 BAR) Pump stops when changing functions Optional Weekly Backwash – programmable 1.5" and 2" valve versions available Can be used on Top or Side Mount valve bodies Automatic Pump switch off during any function change Length of Backwash Time is Adjustable (between 0.5 and 4.0 minutes) Adjustable Rinse Time – 20 or 40 seconds



Code Number	Description
HCMPV150SA	Automatic Multi port valve 1.5" Side Mounted
HCMPV200SA	Automatic Multi port valve 2" Side Mounted
HCMPV300SA	Automatic Multi port valve 3" Side Mounted



## VALVE BATTERY

5 valve manual backwash system (unassembled). Each kit includes: 5 x tee pieces, 2 x 90° Elbows, 5 x butterfly valves, 12 x stub flanges, 12 x backing ring, 12 x flat gaskets



Code Number	Description
HCVB90	5 x 90mm Butterfly valve and pipe fittings VB
HCVB110	5 x 110mm Butterfly valve and pipe fittings VB
HCVB125	5 x 125mm Butterfly valve and pipe fittings VB
HCVB160	5 x 160mm Butterfly valve and pipe fittings VB
HCVB200	5 x 200mm Butterfly valve and pipe fittings VB



## PUMP CONTROL SWITCH

Circuit breaker protection (2 pumps of 1.6 at 10 A), contactor and 24 h timer. Three positions: Auto/0/manual. Protected 230 V 10 A output for lights. Protected 12 V 315 VA output for 1 underwater light.

## FILTER MEDIA

Filter media are the portion of a filtering system that separates unwanted particles from the substance being filtered. This media is more efficient. It can remove up to 30% more material and pollutants than, so saving on backwashing and the resultant water, energy and chemical treatment costs.



Grade - 1

Size: 4/8, Approx.5.6mm  
Packaging: 25kg Bag



Grade - 3

Size: 16/30/32  
Packaging: 25kg Bag



Grade - 2

Size: 8/16



Grade - 2

Size: 8/16  
Packaging: 25kg Bag



Grade - 1

Size: 4/8



Grade - 3

Size: 16/323

The single media filtration by use of filter sand is widely spread as a general filtering method. However in these days the treated water quality standards are tightened in addition to the deterioration problem of raw water quality arisen from the growth of algae and cryptosporidium, the part of filtration, which is a key point of water purification become more important and performance is required.

## FILTRAL UVC - Underwater filter with UVC for small ponds



- Suitable for ponds and pre-formed pools up to 9 m<sup>3</sup>
- Including OASE Clear Water Guarantee \*P. 97
- Compact filter unit with UVC technology and 4 different filter materials
- Supplied with 90° bend and stepped hose adapter for feeding a small watercourse or water feature
- Set up completely under water-the appearance of the pond remains undisturbed
- Visual function check of the UVC clarifier
- Can be operated with the additional Filtral Nozzle Set (50089) to create a fountain effect



FILTRAL UVC	1500	3000	6000	1500 GB	3000 GB	6000 GB	9000 GB
Dimensions [L x W x H] mm	207x228x130	269x245x140	347x245x157	207x228x130	269x245x140	347 x 276 x 157	
Power consumption W	18	36	52	18	36	52	58
Power cable length m				10.00			
Guarantee Years *P. 97				2			
UVC power W	5	9	11	5	9	11	13
Pump capacity, max. l/h	750	1500	2500	750	1500	2500	
Max. flow rate l/h	560	1200	1700	560	1200	1700	
Max. head height, metres m	0.90	1.80	2.10	0.90	1.80	2.10	
Pressure side connection mm [inch]	13(1/2")	13/19 / 25 (1/2", 3/4", 1")	13(1/2")		13/19 / 25 (1/2", 3/4", 1")		
Suitable for ponds up to max. m <sup>3</sup>	1.5	3.0	6.0	1.5	3.0	6.0	9.0
Suitable for ponds with fish stock m <sup>3</sup>	0.7	1.5	3.0	0.7	1.5	3.0	4.5

## BIO PRESS SETS - Solid pressure filter set with UVC and filter pump

- Suitable for ponds up to 10 m<sup>3</sup>
- Combination of mechanical biological cleaning and effective UVC technology
- Including OASE Clear Water Guarantee \*P. 97
- Ideal for supplying higher elevated water Courses
- A patented cleaning function integrated in the cover facilitates cleaning of the filter
- Quick release provides easy filter opening and closing for maintenance purposes
- It can be buried for almost invisible integration in the garden
- Supplied with all hose connections for fast and trouble free installation



BIO PRESS SET	4000	6000	10000	
Dimensions(Øx H)	mm	225x235	350x450	350x570
Power consumption UVC	w	11	12	14
Power consumption pump	m	25	40	70
Power cable length UVC	m		3.00	
Power cable length pump	m		10.00	
Guarantee *P. 97	Years		2	
UVC power	w	7	9	11
Connection inlet	mm(inch)		19 / 25 /32 / 38 (3/4", 1", 1 1/4", 1 1/2" )	
Connection outlet	mm(inch)		19 / 25 /32 / 38 (3/4", 1", 1 1/4", 1 1/2" )	
Max operating pressure	bar		0.2	
Suitable for ponds up to max	m <sup>3</sup>	4.0	6.0	10.0
Suitable for ponds with fish stock	m <sup>3</sup>	2.0	3.0	5.0
Suitable for ponds with koi *	m <sup>3</sup>	1.0	1.5	2.5

**BIO TEC SCREENMATIC** - high performance filter with automatic coarse- debris extraction

- Highly effective flow-through filter for ponds up to 140 m<sup>3</sup>
- Significantly less maintenance is required, thanks to coarse debris extraction
- More convenience, thanks to automatically driven self cleaning of the belt filter. Adjustable cleaning sensor controls the belt run, depending on the degree of pollution. Incl. LED function check
- Cleaning of filter sponges directly in the filter, without removal
- Sludge drain with slide valve for removing debris from the filter system
- Different filter media for optimal development of filter bacteria
- Direct connection possibility for Bitron C and Eco UVC clarifiers



BIOTEC SCREEN MATIC	40000	40000	90000	140000
Dimensions(LxWxH)) mm	788X590X445	788X590x545	788X590x645	1200x800x760
Power consumption w			5	
Cable length 12V ( with power unit) m		2.10 (Power unit) + 5.00		
Guarantee *P. 97 Years			2+1	
Special filter granulate kg	2.50	3.50	5.00	14.50
Coarse debris extraction µm		300		
Connection inlet mm (inch)	25 / 32 / 38 [1", 1 ¼", 1 ½"]		25 / 32 / 38 / 50 [1", 1 ¼", 1 ½", 2"]	
Connection Outlet	DN 75		DN 110	
Connections, sludge discharge DN 50			DN 75	
Max Flow rate l/h	9000	11000	12500	17500
Suitable for ponds up to max m <sup>3</sup>	40.0	60.0	90.0	140.0
Suitable for ponds with fish stock m <sup>3</sup>	20.0	30.0	45.0	70.0
Suitable for ponds with koi *1 m <sup>3</sup>	10.0	15.0	22.5	35.0

## DENVER PUMP



Self Priming Built-in pre-filter Polypropylene body Noryl impeller Motor IP55 protection rated 316 stainless steel shaft 2" connections  
Pump body manufactured in fibre-glass and mineral reinforced polypropylene and transparent polycarbonate cover  
Suction connection Ø90 and return connection Ø70 (supplied with couplings and metric unions)

## BIG DENVER PUMP



Big Denver pump range is ideal for smaller commercial applications. Pump body manufactured in fibre-glass and mineral reinforced polypropylene and transparent polycarbonate cover 316 stainless steel shaft Plastic impeller Pre-filter capacity 8 litres IP55 protection rated Suction connection Ø90 and return connection Ø70 (supplied with couplings and metric unions)  
Self priming at 2m

## COMMERCIAL BP RANGE PUMP



Designed with efficiency in mind, these unique centrifugal pumps offer quality, performance and reliability. All models in this range have been designed and developed primarily for the swimming pool industry. Designed to circulate large quantities of low pressure water. High quality corrosion resistant components. Cast iron body. Bronze impeller. IP55 protection rated. Integral strainer box. Self priming. Stainless steel strainer basket and shaft. Mechanically sealed shaft. Quality 1500 rpm/3000 rpm motor.

## COMMERCIAL AIR BLOWER



Air blower housing and the impeller are made of a light Aluminium alloy, whereas the shaft is made of S.S. on which the impeller is mounted and dynamically balanced. Power consumption 100-120/200-240 V single phase and the 200-240/280-440 V three phase. motors at 50/60 Hz for non-stop operation, are manufactured according to the IEC Standards and come with an IP 54 outer protection and an F Class insulation.

## COUNTER-CURRENT UNIT



The system is equipped with a 3HP pump to create a counterstream of water which allows you to swim on the spot. The adjustable current means that swimmers of all levels can swim at their own pace for as long as they like. The directional inlet allows a 15-degree inclination in any direction and also features an adjustable air/water mixer for a relaxing bubble massage effect.

## COUNTER-CURRENT UNIT



Advance N.D Countercurrent kit made up of:

- Return inlet (air-water) made of polished AISI-316 stainless steel.
- Illuminated ON-OFF and +/- piezoelectric push button made of AISI-316 stainless steel.
- Suction grille with a capacity of 60 m<sup>3</sup>/h made of polished AISI-316 stainless steel. 5.5 HP pump.
- Flow rate adjustable from 23 m<sup>3</sup>/h to 50 m<sup>3</sup>/h thanks to a variable-speed drive.
- Power control cabinet

**ABS POOL FITTINGS****HCWIT**

Angle / Flow Adjustable ABS Wall Inlet in ABS 2" Outer threaded & 1.5" Inside threaded connections 5-9 m3/hr. WHITE color available and suitable for 6Kg & 10Kg Pipes

**HCMD 225 / 300**

Square Main Drain-Frame & Grille in ABS 225 x 225mm 20 m3/hr & ABS 300 x 300mm 33 m3/hr.

**HCVPT**

Vacuum Point in ABS 2" threaded connections, WHITE color available and suitable for 6Kg & 10Kg Pipes

**HCMD 450 / 600 SF**

Square Main Drain-Frame in SS & grille in ABS 450x450mm 80m3/hr. ABS 600x600mm 132m3/hr.

**HCFIT**

Adjustable floor inlet in ABS Standard design 2" threaded connections 9m3/hr - 12 m3/hr

**HCOFF**

Gutter Drain in ABS 50mm Solvent connections 7m3/hr.

**HCFIDS**

Adjustable floor inlet in ABS Diffuser design 2" Solvent connections 9m3/hr - 12 m3/hr suitable for 6Kg 10Kg Pipes

**HCSK15**

Skimmer - Square in ABS 15 LTR capacity 5 m3/hr.

**HCCMD200**

Main drain with anti entrapment grille complete for Concrete Pools 200mm dia, 1 1/2" connections 18m3/hr.

**HCOFF250 / 300**

Overflow gratings 250 / 300 mm PPG

**HCCMD150G**

Circular Main Drain- Frame & Grille in ABS 150mm dia 18 m3/hr.

**HCOFFSS**

SS Gutter Drain 50mm threaded connections 7m3/hr.  
HSN CODE 73242900

## STAINLESS STEEL POOL FITTINGS

**HCWISC**

Adjustable Wall Inlet in SS  
50mm threaded  
connections 5m3/hr.

**HCVPT**

Vacuum point made of  
SS 50mm threaded connections

**HCFISC**

Flow adjustable Floor Inlet  
Circle in SS 50mm  
threaded connections  
9m3/hr.

**HCCMD150SS**

Circular Main Drain- Frame in  
ABS & Grille in SS

**HCMD225SS**

Square Main Drain Frame  
in ABS & Grille in SS  
225x225mm 20m3/hr.

**HCWC**

Wall conduit for Fitting 2"  
threaded

**HCOFF**

Gutter Drain in ABS 50mm  
Solvent connections 7m3/hr.  
HSN CODE 39269099



**Stainless Steel Orientable  
Wall and Floor Inlets for  
Swimming Pool**



**Stainless Steel  
Swimming Pool Grating**



**Main Drain Stainless Steel**



**Air Bubbler**



**Stainless steel vacuum inlet  
swimming pools and  
water bodies**

**SPA FITTINGS****HCJN5032**

Spa nozzles with a flow rate of 4.5 cu.mtr. Water connections: 50mm & air connections: 32mm ( BS & ASTM connections available)

**HCJN3232**

Spa nozzles with a flow rate of 4.5 cu.mtr. Water connections: 32mm & air connections: 32mm

**HCCPSPD**

Spa suction ABS / Chrome Plated with 1.5" / 2" Elbow connections

**HCSPD**

Spa suction ABS / Chrome Plated with 1.5" / 2" Straight connections

**HCBLN**

Air bubbler nozzle-20mm connections

**HCAVC**

Air volume controller to regulate the air flow in the nozzle

**HCPB**

Pushbutton ABS with 1" threaded connections

**HCPNS**

Pneumatic switch for pump control panel to connect the push button.

**HCAT**

Air Tube Per mtr . (Only Sold in Multiples of 25mtr)

**Hydro Jet Nozzle**

3 inch jet cover bathtub whirlpool , hot tub spa massage jet nozzle

**MAINTENANCE ACCESSORIES****HCWBH**

18" (450mm) Heavy duty wall brush with poly bristle - Dark blue color

**HCWBER**

18" ( 460mm ) ECO Wall brush- with Polypropylene bristles, with heavy duty plastic handle, clip in fastening

## MAINTENANCE ACCESSORIES



**HCWBHR**

18" ( 460mm ) Wall brush- with Polypropylene bristles, Polished Aluminum reinforced back & handle, clip in fastening



**HCABH10**

10"(250mm) Algae brush- SS bristle, clip in fastening- Dark Blue



**HCABHR**

10" ( 250mm) Algae brush - with SS bristles, Polished Aluminum reinforced back & handle, clip in fastening



**HCABH5**

5"(125mm) Algae brush- SS bristle, clip in fastening- Dark Blue



**HCFNH**

Heavy duty Flat net with 5 Micron mesh, clip in fastening- Dark Blue



**HCFNHR**

Heavy duty Flat Net model with Polypropylene, puncture resistant net, Aluminum frame & handle



**HCDNH**

Heavy duty 15" deep net with 5 Micron mesh, clip in fastening- Dark Blue



**HCDNHR**

Heavy duty Deep Net model with Polypropylene, puncture resistant net, Aluminum frame & handle



**HCFVH350P**

350mm Flexible VAC head with swivel hose connections, clip in fastening, Dark Blue



**HCFVH350R**

Heavy duty 350mm Vacuum Head with Multidirectional handle with bottom rolling balls and bristles

**HCALVH350**

350mm Anodised Aluminium VAC head-clip in fastening-Silver

**HCALVH450**

450mm Anodised Aluminium VAC head-clip in fastening-Silver



**HC-TKS**

Test Kit Spare



**HCHS06** - 6mtr hose

**HCHS09** - 9mtr hose

**HCHS15** - 15mtr hose

**HCHS18** - 18mtr hose

**HCHS25** - 25mtr hose

**HCHS30** - 30mtr hose



**Hc816** 8-16' Telescopic pole with handgrip & clip-in fastening- Corrugated- Silver color

**Hc1030** 9-27' , 3 part Telescopic pole with handgrip & clip- in fastening- Ribbed- Silver color

**Hc412** 4'-12' Telescopic pole with handgrip & clip-in fastening- Corrugated- Silver color

**HC816R** 8-16' Telescopic pole made of Anodised Aluminum tube, with TWIST lock cam, New handle grip, handgrip & clip in fastening

**SS LADDERS & HANDRAILS**

Stainless steel pool Ladder with non slip threads , Pinch anchor & Ladder Bumper

**Club Ladder**

Club ladder with handrails including non slip step.  
42mm dia Rails and steps made from 304 stainless steel

**HCCL2 - 2 Steps****HCCL3 - 3 steps****HCCL4 - 4 steps****HCCL5 - 5 steps****Under cover Ladder**

Club ladder with handrails including non slip step.  
42mm dia Rails and steps made from 304 stainless steel

**HCUCL2 - 2 Steps****HCUCL3 - 3 steps****Hand rail**

Hand Rail With Closed Bracket SS 304, 38 mm

**HCHR1 - 1 mtr Long****HCHR2 - 2 mtr Long****HCHR3 - 3 mtr Long****HCHR4 - 4 mtr Long****Standard Ladder**

Standard ladder with handrails including non slip step.  
42mm dia Rails and steps made from 304 stainless steel

**HCSTD2 - 2 STEPS****HCSTD3 - 3 STEPS****HCSTD4 - 4 STEPS****HCSTD5 - 5 STEPS**

**SS LADDERS & HANDRAILS** Stainless steel pool Ladder with non slip threads , Pinch anchor & Ladder Bumper



**Overflow Ladder**

Overflow ladder with handrails including non slip step.  
42mm dia Rails and steps made from 304 stainless steel

**HCOFF2 - 2 STEPS**

**HCOFF3 - 3 STEPS**

**HCOFF4 - 4 STEPS**

**HCOFF5 - 5 STEPS**

**UNDERWATER LIGHTS** Stainless steel - SS316

Wall Mounted Lights for Swimming Pool / Water Feature applications



**HCWM6SS** Warm White LED light 3W/ 6W-12V

**HCWM18SS** Warm White LED light 10W/ 18W-12V

**HCWM25SS** Warm White LED light 25W -12V



**HCWM35SS** Warm White LED light 35W -12V

**HCWM60SS** Warm White LED light 60W -12V

Stand / Niche Mounted Lights for Swimming Pool / Water Feature applications



**HCNSM6SS** Warm White LED light 3W/ 6W-12V

**HCNSM9SS** Warm White LED light 9W -12V



**HCNSM12SS** Warm White LED light 12W -12V

**HCNSM18SS** Warm White LED light 18W -12V

**UNDERWATER LIGHTS** Stainless steel - SS316

Nozzle Ring Lights for Swimming Pool / Above water applications



**HCRL9SS1** Warm White LED Ring light 9w - 12v suitable for 1" fountain nozzle

**HCRL15SS1** Warm White LED Ring light 12w/15w - 12v suitable for 1" fountain nozzle

**HCRL9SS2** Warm White LED Ring light 9w - 12v suitable for 1.5" fountain nozzle



**HCRL12SS2** Warm White LED Ring light 12w/15w -2v suitable for 1.5" fountain nozzle

**HCRL18SS2** Warm White LED Ring light 18w - 12v suitable for 1.5" fountain nozzle

Underwater Wall Mounted Lights with SS ABS Face plate, SS body



**HCWML12WWSS** Warm White LED light 12w - 12v with SS Face plate

**HCWML12CWSS** Cool White LED light 12w - 12v with SS Face plate

**HCWML12RSS** Underwater LED light 12W-12V with SS Face plate



**HCWML25WWSS** Warm White LED light 25W-12V with SS Face plate

**HCWML35WWSS** Underwater LED light 35W-12V with SS Face plate

Underwater Wall Mounted Lights with ABS Face plate & body



**HCWML18WW** Warm White LED light 18W-12V with ABS Face plate & body

**HCWML18CW** Cool White LED light 18W-12V with ABS Face plate & body

**HCWML18R** RGB LED light 18W-12V with ABS Face plate & body

**Swimming Pool Underwater Lights**

**HCUWL300N** Light for concrete pool. 300W/12V Light & Niche with 3m cable

**HCWMN100H** Wall Mounted Halogen Flat Light in ABS 100W/12V

**HCUWL50C** Light for concrete pool. 50W/12V Light with ABS face plate

**HCWML16-24W** LED light with driver. 16-24W/24V Light & Niche with 3m cable

**HCDB** Ip65 rated Deck Box for underwater lights

**UV CLARIFIERS** CUVs ensure that the swimming pool water will have amazing clarity by killing the single cell algae that causes green water.

#### UV Clarifier System with Timer and SS body for Residential Pool



<b>HC UVC TIMER 40W</b>	Blue Lagoon UVC Timer 40000L/40Watt, 11m <sup>3</sup> /hr
<b>HC UVC TIMER 75W</b>	Blue Lagoon UVC Timer 75000L/75Watt, 16m <sup>3</sup> /hr
<b>HC UVC TIMER 130W</b>	Blue Lagoon UVC Timer 150000L/130Watt, 22m <sup>3</sup> /hr

#### UV Clarifier System for semi commercial Pool



<b>HC UVC PRO 75W</b>	UVC Pro 75000L/75Watt, 18m <sup>3</sup> /hr
<b>HC UVC PRO 130W</b>	UVC Pro 150000L/130Watt 22m <sup>3</sup> /hr
<b>HC UVC PRO BUSTER</b>	UVC Pro BUSTER 450000L/3 X 130Watt, 35m <sup>3</sup> /hr

#### UV Clarifiers in ABS without Timer System



**HCUV015** 15 Watt UV Clarifier, 450mm (L) x 167mm (H) x 88mm (D) Suitable for 7.5-15K ltrs



**HCUV016** 25 Watt UV Clarifier, 450mm (L) x 167mm (H) x 88mm (D) Suitable for 10-20K ltrs



**HCUV017** 30 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 15-30K ltrs



**HCUV018** 55 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 20-55K ltrs



**HCUV019** 75 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 25-75K ltrs

**HCUV020** 110 Watt UV Clarifier, 1000mm (L) x 167mm (H) x 88mm (D) Suitable for 25-110K ltrs

**OZONATOR** Ozone generators to keep swimming pool water clean and odour free.

## Prozone UV Systems



**PZ7-1** PZVII-1 Ozonator Venturi driven rated up to 68m3 C/W adjustable saddle clamps



**PZ7-1** PZVII-2 Ozonator Venturi driven rated up to 150m3 C/W adjustable saddle clamps

**PZ7-2** PZII-2 Ozonator Compressor driven rated comes C/W adjustable saddle clamps

**PZ7-4** PZII-4 Ozonator Compressor driven

**PZ7-8** PZII-8 Ozonator Compressor driven

## E Series Salt Chlorinator



**ESSC25** Certikin E25 Salt Chlorinator, 25gms/hr, pools up to 96m3

**ESSC35** Certikin E25 Salt Chlorinator, 25gms/hr, pools up to 96m3

## Commercial UV



**BL420 - 168** BLUE LAGOON Commercial UV suitable upto 78 m3/hr, with 90mm connections



**BL400-204** BLUE LAGOON Commercial UV suitable upto z2 m3/hr, with 100mm connections



**BL600-219** BLUE LAGOON Commercial UV suitable upto 140 m3/hr, with 125mm connections



**BL975-306** BLUE LAGOON Commercial UV suitable upto 306 m3/hr, with 250mm connections

## CHEMICAL DOSING SYSTEM

Swimming Pool Dosing Pump System is designed to inject chemicals into piping systems. All models are equipped with a side mounted mechanical flow rate adjustment knob Easy access, side mounted mechanical feed rate adjustment.



**HCCDP505** Chemical dosing pump, 5LPH@5Bar



**HCCDT100** Chemical Dosing tank 100LTR



**HCSTR600** Stirrer 600mm Long



**HCCF9** 9LBS / 4 Kg, Chemical Feeder ( HS code 39269099)



Use of alum gel in the pool creates a gel-like substance in the water that causes microscopic suspended particles to clump together and sink to the bottom of the pool



Trichloroisocyanuric Acid & chemical is used as a disinfecting agent in swimming pools and fountain water bodies and helps in achieving sparkling clean and clear water.

## STAINLESS STEEL WATER FALL FITTING

Graceful waterfalls of robust and non-rusting stainless steel Individual design and easy install possibilities thanks to 3 different widths Elegant, uniform water pattern up to 1 m in height



**RLIWF300SS** 300mm wide Recommended flow 5m<sup>3</sup>/hr, Max recommended heights in 300mm

**RLIWF600SS** 600mm wide Recommended flow 7m<sup>3</sup>/hr, Max recommended heights in 750mm

**RLIWF900SS** 900mm wide Recommended flow 11m<sup>3</sup>/hr, Max recommended heights in 1000mm

**RLIWF1200SS** 1200mm wide Recommended flow 14m<sup>3</sup>/hr, Max recommended heights in 1200mm

## WATER CURTAIN

This ornamental effect creates a large screen of water that serves as a perfect surface



**RLICANMINI300** Water cannon mini300 - H-300xW-300mm, Flow - 7m<sup>3</sup>/hr, inlet PVC connections 50mm (1-1/2" )



**RLICANMINI500** Water cannon mini500 - H-500xW-500mm, Flow - 16m<sup>3</sup>/hr, inlet PVC connections 63mm (2" )



**RLICANMINI50** Water cannon mini500 - H-500xW-500mm, Flow - 16m<sup>3</sup>/hr, inlet PVC connections 63mm (2" )



**HCCOBMINI500** Cobra Water fall mini500- H-500xW-500mm, Flow - 16m<sup>3</sup>/hr, inlet PVC connections 63mm (2" )



**HCCOBMAXI500** Cobra Water fall maxi500- H-500xW-500mm, Flow - 16m<sup>3</sup>/hr, inlet PVC connections 63mm (2" )



**HCCOBUL400** Cobra Water fall ultra400- H-1000xW-400mm, Flow - 11m<sup>3</sup>/hr, inlet PVC connections 63mm (2" )

**HEAT PUMP**

Heat pumps are specifically designed for swimming pool heating. Comes with Titanium heat exchanger , Exterior UV protected ABS body, with reversible defrosting and R410A Gas. Single fans upto 21KW & Twin fans for 26 & 31KW



Code Number	Description	
HCHPD5.5	Swimming pool Heat Pump, Output	5.5KW
HCHPD12.5	Swimming pool Heat Pump, Output	12.5KW
HCHPD15	Swimming pool Heat Pump, Output	15KW
HCHPD17	Swimming pool Heat Pump, Output	17KW
HCHPD21	Swimming pool Heat Pump, Output	21KW
HCHPD26	Swimming pool Heat Pump, Output	26 KW
HCHPD31	Swimming pool Heat Pump, Output	31KW

Heat pumps are specifically designed for swimming pool heating. Comes with Titanium heat exchanger , Exterior UV protected ABS body, with reversible defrosting and R410A Gas. Top mounted Twin fans for 35,45,55,70KW, Three fans for all larger models



Code Number	Description	
HCHPC35	Commercial Swimming pool Heat Pump, Output	35KW
HCHPC45	Commercial Swimming pool Heat Pump, Output	45KW
HCHPC55	Commercial Swimming pool Heat Pump, Output	55KW
HCHPC70	Commercial Swimming pool Heat Pump, Output	70KW
HCHPC90	Commercial Swimming pool Heat Pump, Output	90 KW
HCHPC105	Commercial Swimming pool Heat Pump, Output	105KW
HCHPC135	Commercial Swimming pool Heat Pump, Output	135KW

## POOL / SPA WATER HEATER

Electrical water heaters of swimming pool / spa will keep heated at a consistent temperature between eighty and ninety degrees. If you are set in a daily, year-round swimming routine then this heater is the choice for you. Make: Certikin



Code Number	Description
EVOMAX9	Swimming Pool Water Heater, cap; 9kW
EVOMAX12	Swimming Pool Water Heater, cap; 12kW
EVOMAX15	Swimming Pool Water Heater, cap; 15kW
EVOMAX18	Swimming Pool Water Heater, cap; 18kW
CLSMAX24	Swimming Pool Water Heater, cap; 24kW

## INVERTER HEAT PUMP

Heat pump with DC-TWIN invertor compressor, Twisted Titanium heat exchanger for higher efficiency, EEV technology for increased COP, R32 gas ( eco friendly than R410A), silent model in the industry



Code Number	Description
HC90I	Invertor Heat Pump Domestic, 9KW Output ( 0.19 -1.38KW INPUT)
HC130I	Invertor Heat Pump Domestic, 13KW Output ( 0.26 -1.80KW INPUT)
HC170I	Invertor Heat Pump Domestic, 17KW Output ( 0.33 -2.50KW INPUT)
HC210I	Invertor Heat Pump Domestic, 21KW Output ( 0.38 -2.90KW INPUT)
HC280I	Invertor Heat Pump Domestic, 28KW Output ( 0.49 -3.80KW INPUT)
HC350SI	Invertor Heat Pump Domestic, 35KW Output ( 0.65 -4.84KW INPUT)

**SWIMMING POOL COVER****HCSPC01**

Swimming pool cover necessary with stainless steel hooks with rope.

**HCSPC02**

Pool cover with 83mm PVC slats of White, Blue, Sable, Light Grey

**HCSPCR02**

Manual pool roller, Rockey Roller senior

**VALVES** PVC-U [STD] Ball valve - DIN Standard. Make: Cepex

**36500** 16mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36501** 20mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36502** 25mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36503** 32mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36504** 40mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36505** 50mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36506** 63mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36507** 75mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**36508** 90mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket

**VALVES** PVC-U [STD] Ball valve - DIN Standard. Make: Cepex

<b>36509</b>	110mm PVC-U [STD] BALL VALVE (PE-EPDM) solvent socket
<b>36511</b>	1/2" PVC-U [STD] BALL VALVE BSP female thread
<b>36512</b>	3/4" PVC-U [STD] BALL VALVE BSP female thread
<b>36513</b>	1" PVC-U [STD] BALL VALVE BSP female thread
<b>36514</b>	1 1/4" PVC-U [STD] BALL VALVE BSP female thread
<b>36515</b>	1 1/2" PVC-U [STD] BALL VALVE BSP female thread
<b>36516</b>	2" PVC-U [STD] BALL VALVE BSP female thread
<b>36517</b>	2 1/2" PVC-U [STD] BALL VALVE BSP female thread
<b>36518</b>	3" PVC-U [STD] BALL VALVE BSP female thread
<b>36519</b>	4" PVC-U [STD] BALL VALVE BSP female thread

**VALVES** PVC-U [ UNIBLOCK ] Ball valve- DIN Standard. Make: Cepex

<b>22773</b>	20mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>22774</b>	25mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>22775</b>	32mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>22776</b>	40mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>11375</b>	50mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>15826</b>	63mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>22777</b>	75mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>22778</b>	90mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>36728</b>	110mm PVC-U "UNIBLOCK" BALL VALVE solvent socket
<b>22791</b>	1/2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>22792</b>	3/4" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>22793</b>	1" PVC-U "UNIBLOCK" BALL VALVE BSP female thread

**VALVES PVC-U [ UNIBLOCK ] Ball valve- DIN Standard. Make: Cepex**

<b>22794</b>	1 1/4" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>11377</b>	1 1/2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>15829</b>	2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>22795</b>	2 1/2" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>22796</b>	3" PVC-U "UNIBLOCK" BALL VALVE BSP female thread
<b>36729</b>	4" PVC-U "UNIBLOCK" BALL VALVE BSP female thread

**VALVES PVC-U Spring Check valve - DIN Standard. Make: Cepex**

<b>09010</b>	16mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09011</b>	20mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09012</b>	25mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09013</b>	32mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09014</b>	40mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09015</b>	50mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09016</b>	63mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09017</b>	75mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09018</b>	90mm PVC-U CHECK VALVE (EPDM) solvent socket
<b>09019</b>	110 (DN 80)mm PVC-U CHECK VALVE solvent socket
<b>37076</b>	110 (DN 110)mm PVC-U CHECK VALVE (EPDM) solvent socket

**VALVES PVC-U Ball Check valve - DIN Standard. Make: Cepex**

<b>22078</b>	20mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
<b>22079</b>	25mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
<b>22080</b>	32mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
<b>22174</b>	40mm PVC-U BALL CHECK VALVE (EPDM) solvent socket
<b>25697</b>	50mm PVC-U BALL CHECK VALVE (EPDM) solvent socket

**VALVES** PVC-U Ball Check valve - DIN Standard. Make: Cepex

- 25698** 63mm PVC-U BALL CHECK VALVE (EPDM) solvent socket  
**25175** 75mm PVC-U BALL CHECK VALVE (EPDM) solvent socket  
**25176** 90mm PVC-U BALL CHECK VALVE (EPDM) solvent socket

**VALVES** PVC-U FLANGE ADAPTER - DIN STANDARD Make: Cepex

- 22580** 63mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02226** 75mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02227** 90mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02228** 110mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02229** 125mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02230** 140mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02231** 160mm PVC FLANGE ADAPTOR (STUB & BACKING RING)  
**02232** 200mm PVC FLANGE ADAPTOR (STUB & BACKING RING)

**VALVES** PVC-U Wafer Check valve - DIN Standard. Make: Cepex

- 37055** 63mm PVC-U WAFER CHECK VALVE  
**08984** 75mm PVC-U WAFER CHECK VALVE  
**08985** 90mm PVC-U WAFER CHECK VALVE  
**08986** 110mm PVC-U WAFER CHECK VALVE  
**09040** 125mm PVC-U WAFER CHECK VALVE  
**08987** 140mm PVC-U WAFER CHECK VALVE  
**08988** 160mm PVC-U WAFER CHECK VALVE  
**09041** 200mm PVC-U WAFER CHECK VALVE

**VALVES PVC-U SPRING FOOT VALVE - DIN STANDARD**

- 08992** 25mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08993** 32mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08994** 40mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08995** 50mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08996** 63mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08997** 75mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08998** 90mm PVC-U FOOT VALVE (EPDM) solvent socket  
**08999** 110 (DN 80)mm PVC-U FOOT VALVE (EPDM) solvent socket

**VALVES PVC-U Wafer Check valve - DIN Standard. Make: Cepex**

- 27537** 20mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**27538** 25mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**27539** 32mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**27540** 40mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**25705** 50mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**25706** 63mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**27543** 75mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**27544** 90mm PVC-U BALL FOOT VALVE (EPDM) solvent socket  
**27545** 110mm PVC-U BALL FOOT VALVE (EPDM) solvent socket

**VALVES PVC-U BUTTERFLY VALVE - STANDARD**

- 32614** 63-75mm PVC-U STANDARD SERIES BUTTERFLY VALVE  
**32615** 90mm PVC-U STANDARD SERIES BUTTERFLY VALVE  
**32616** 110mm PVC-U STANDARD SERIES BUTTERFLY VALVE  
**32617** 125-140mm PVC-U STANDARD SERIES BUTTERFLY VALVE  
**32618** 160mm PVC-U STANDARD SERIES BUTTERFLY VALVE  
**32619** 200-225mm PVC-U STANDARD SERIES BUTTERFLY VALVE  
**46647** 250mm PVC-U STANDARD SERIES BUTTERFLY VALVE

## SWIMMING POOL COMPETITION EQUIPMENTS

Heavy Duty, High Performance & Low Maintenance Pool Competition Equipment.




**HCSB355 / 700**

355 / 700mm height Starting Blocks with mounting frames and foundation bolts Made of AISI-316 stainless steel.



**HCAWLR**

Float line roller 1.8 mtr in Stainless Steel AISI 316 with the capacity of 3 of 50 mtr float lines in each roller.



**HCFSI**

False start indicator with post and necessary fittings made of stainless steel 316. With 48 mm dia and 1.8 m height



**HCCA**

Stainless Steel cup anchor fixing 43mm diameter for float line support.



**HCBSI**

Back stroke indicator with post and necessary fittings made of stainless steel 316. With 48 mm dia and 1.8 m height



**HC24SR**

Life buoy for swim learners / beginners - standard model with nylon thread grip fold.



**HCAWF 25 / 50**

25 / 50 mtr Float Line Maxi 150mm / 6" Antiwave Racing Lane, made in polyethylene, UV stabilised with SS 316 Cable



**HCLH**

Float Line Tensioner



**HCLGC**

Lifeguard Chair, 1800mm High Made in 43mm diameter, AISI-316 stainless steel.



**HCLH**

Float Line SS Hook



**HCLGC**

Lifeguard Chair, 1800mm High Made in 43mm diameter, AISI-316 stainless steel.



**Stainless steel Rope Hook**

Anti rust & corrosion resistant

## LIFE SAVING & INFLATABLE EQUIPMENTS



INTEX GIANT TIRE  
FLOATING TUBE



SWIMMING RING



SWIMMING RING



LIFEBOUY FOR KIDS



LIFEBOUY



ARM BAND



SWIM GOGGLES



SWIM CAP



PULL BUOY



SPORTS KICK BOARD



FLOATING BED



ULTRA FRAME POOL

## LIFE SAVING & INFLATABLE EQUIPMENTS

Heavy Duty, High Performance & Low Maintenance Pool Competition Equipment.



OXYGEN CYLINDER



ARTIFICIAL RESPIRATOR



FIRST AID BOX



LIFE JACKET



LIFE JACKET



KIDS LIFE JACKET



STRETCHER



**FOUNTAIN TECHNOLOGIES**

## Notes

## FOUNTAIN NOZZLES

**HCFN25**

1" Foam Jet Nozzle in  
Chrome on Brass

**HCDJ50**

2" Deck Jet Nozzle

**HCFJN25SS**

1" Fan Jet Nozzle

**HCFJN40SS**

1 1/2" Fan Jet Nozzle

**HCBN25SS**

1" Bell Nozzle

**HCBN40SS**

1 1/2" Bell Nozzle

**HCFJN25SS**

1" Finger Jet Nozzle with  
9 clear single stream jets

**HCFJN40SS**

1 1/2" Finger Jet Nozzle with  
18 clear single stream jets

**HCBU25SS - SS with snorkel**

1" Bubbler Nozzle

**HCBU40SS**

1 1/2" Bubbler Nozzle

**HCBU50SS**

2" Bubbler Nozzle

**HCCN25SS**

1" Cascade Nozzle

**HCCN40SS**

1 1/2" Cascade Nozzle

**HCCN50SS**

2" Cascade Nozzle

**HCCN75SS**

2 1/2" Cascade Nozzle

**HCCSN12SS**

1/2" Comet Nozzle

**HCCSN20SS**

3/4" Comet Nozzle

**HCCSN25SS**

1" Comet Nozzle

**HCCSN40SS**

1 1/2" Comet Nozzle

**HCCSN50SS**

2" Comet Nozzle

The background of the entire image is a close-up, high-angle view of a lush, green lawn. The grass is very short and dense, creating a uniform, textured pattern across the frame.

**NON-WOVEN  
GEOTEXTILE**

## NON-WOVEN GEOTEXTILE

Non-woven geotextiles are produced by entangling fibres, long or short together, either through needle punching or other methods. Due to this manufacturing process and their permeable properties, non-woven geotextiles are generally best used in applications of drainage, separation, filtration and protection.



### **HCGT80GSM**

Non-woven geotextile 80 GSM (Rate per Sq.mtr)

### **HCGT150GSM**

Non-woven geotextile 150 GSM (Rate per Sq.mtr)

### **HCGT200GSM**

Non-woven geotextile 200 GSM (Rate per Sq.mtr)



### **HCGT250GSM**

Non-woven geotextile 250 GSM (Rate per Sq.mtr)

### **HCGT300GSM**

Non-woven geotextile 300 GSM (Rate per Sq.mtr)

### **HCGT500GSM**

Non-woven geotextile 500 GSM (Rate per Sq.mtr)



### **HCGT250GSM**

Non-woven geotextile 250 GSM (Rate per Sq.mtr)

### **HCGT300GSM**

Non-woven geotextile 300 GSM (Rate per Sq.mtr)

### **HCGT500GSM**

Non-woven geotextile 500 GSM (Rate per Sq.mtr)

## NON-WOVEN GEOTEXTILE HSN CODE 5603



Non-woven geotextiles are Permeable Fabrics, Which when used in association have the ability to Separate , Filter , Reinforce , Protect or Drain . Typically made from Polypropylene & Polyester.




ROLLS UPTO 5.5 METERS

Geo Textile comes in 3 Forms


- Non Woven Geo Textile
- Woven Geo Textile
- Heat Bonded Geo Textile

### FUNCTIONS OF NON WOVEN GEO TEXTILE




**Strength**

Re-Enforcement – Geo Textile Improves the Overall Strength of the soil . They Prevent Lateral Spreading of the base , Increases the confinement and Improves the vertical stress distribution of the sub-grade.



**Separation**

Separation – Non Woven Geo Textile Helps in keeping the two layers of the soil Namely subgrade & Aggregate apart, Thus Preventing mixing and in turn deterioration of their function in the structure




**Drainage**

Drainage – Non Woven Geo Textile Have a very high Permeability and allows Water to flow freely along the plane into the Side ditches . This function allows adequate liquid flow without Soil loss. Example – Most Common Examples Tunnel Waterproofing, Canal Lining



**Filtration**


Filtration – Non Woven Geo Textile Allows adequate liquid flow across The plane of the Geo Textile . The Apparent Opening Size (AOS) Allows water to pass Freely from the Geo Textile while preventing Soil to pass through the same . This is due to the Skillful Manufacturing of Non Woven Geo Textile AOS , That the AOS is always keep lower than the size of the Finer Soil Particle

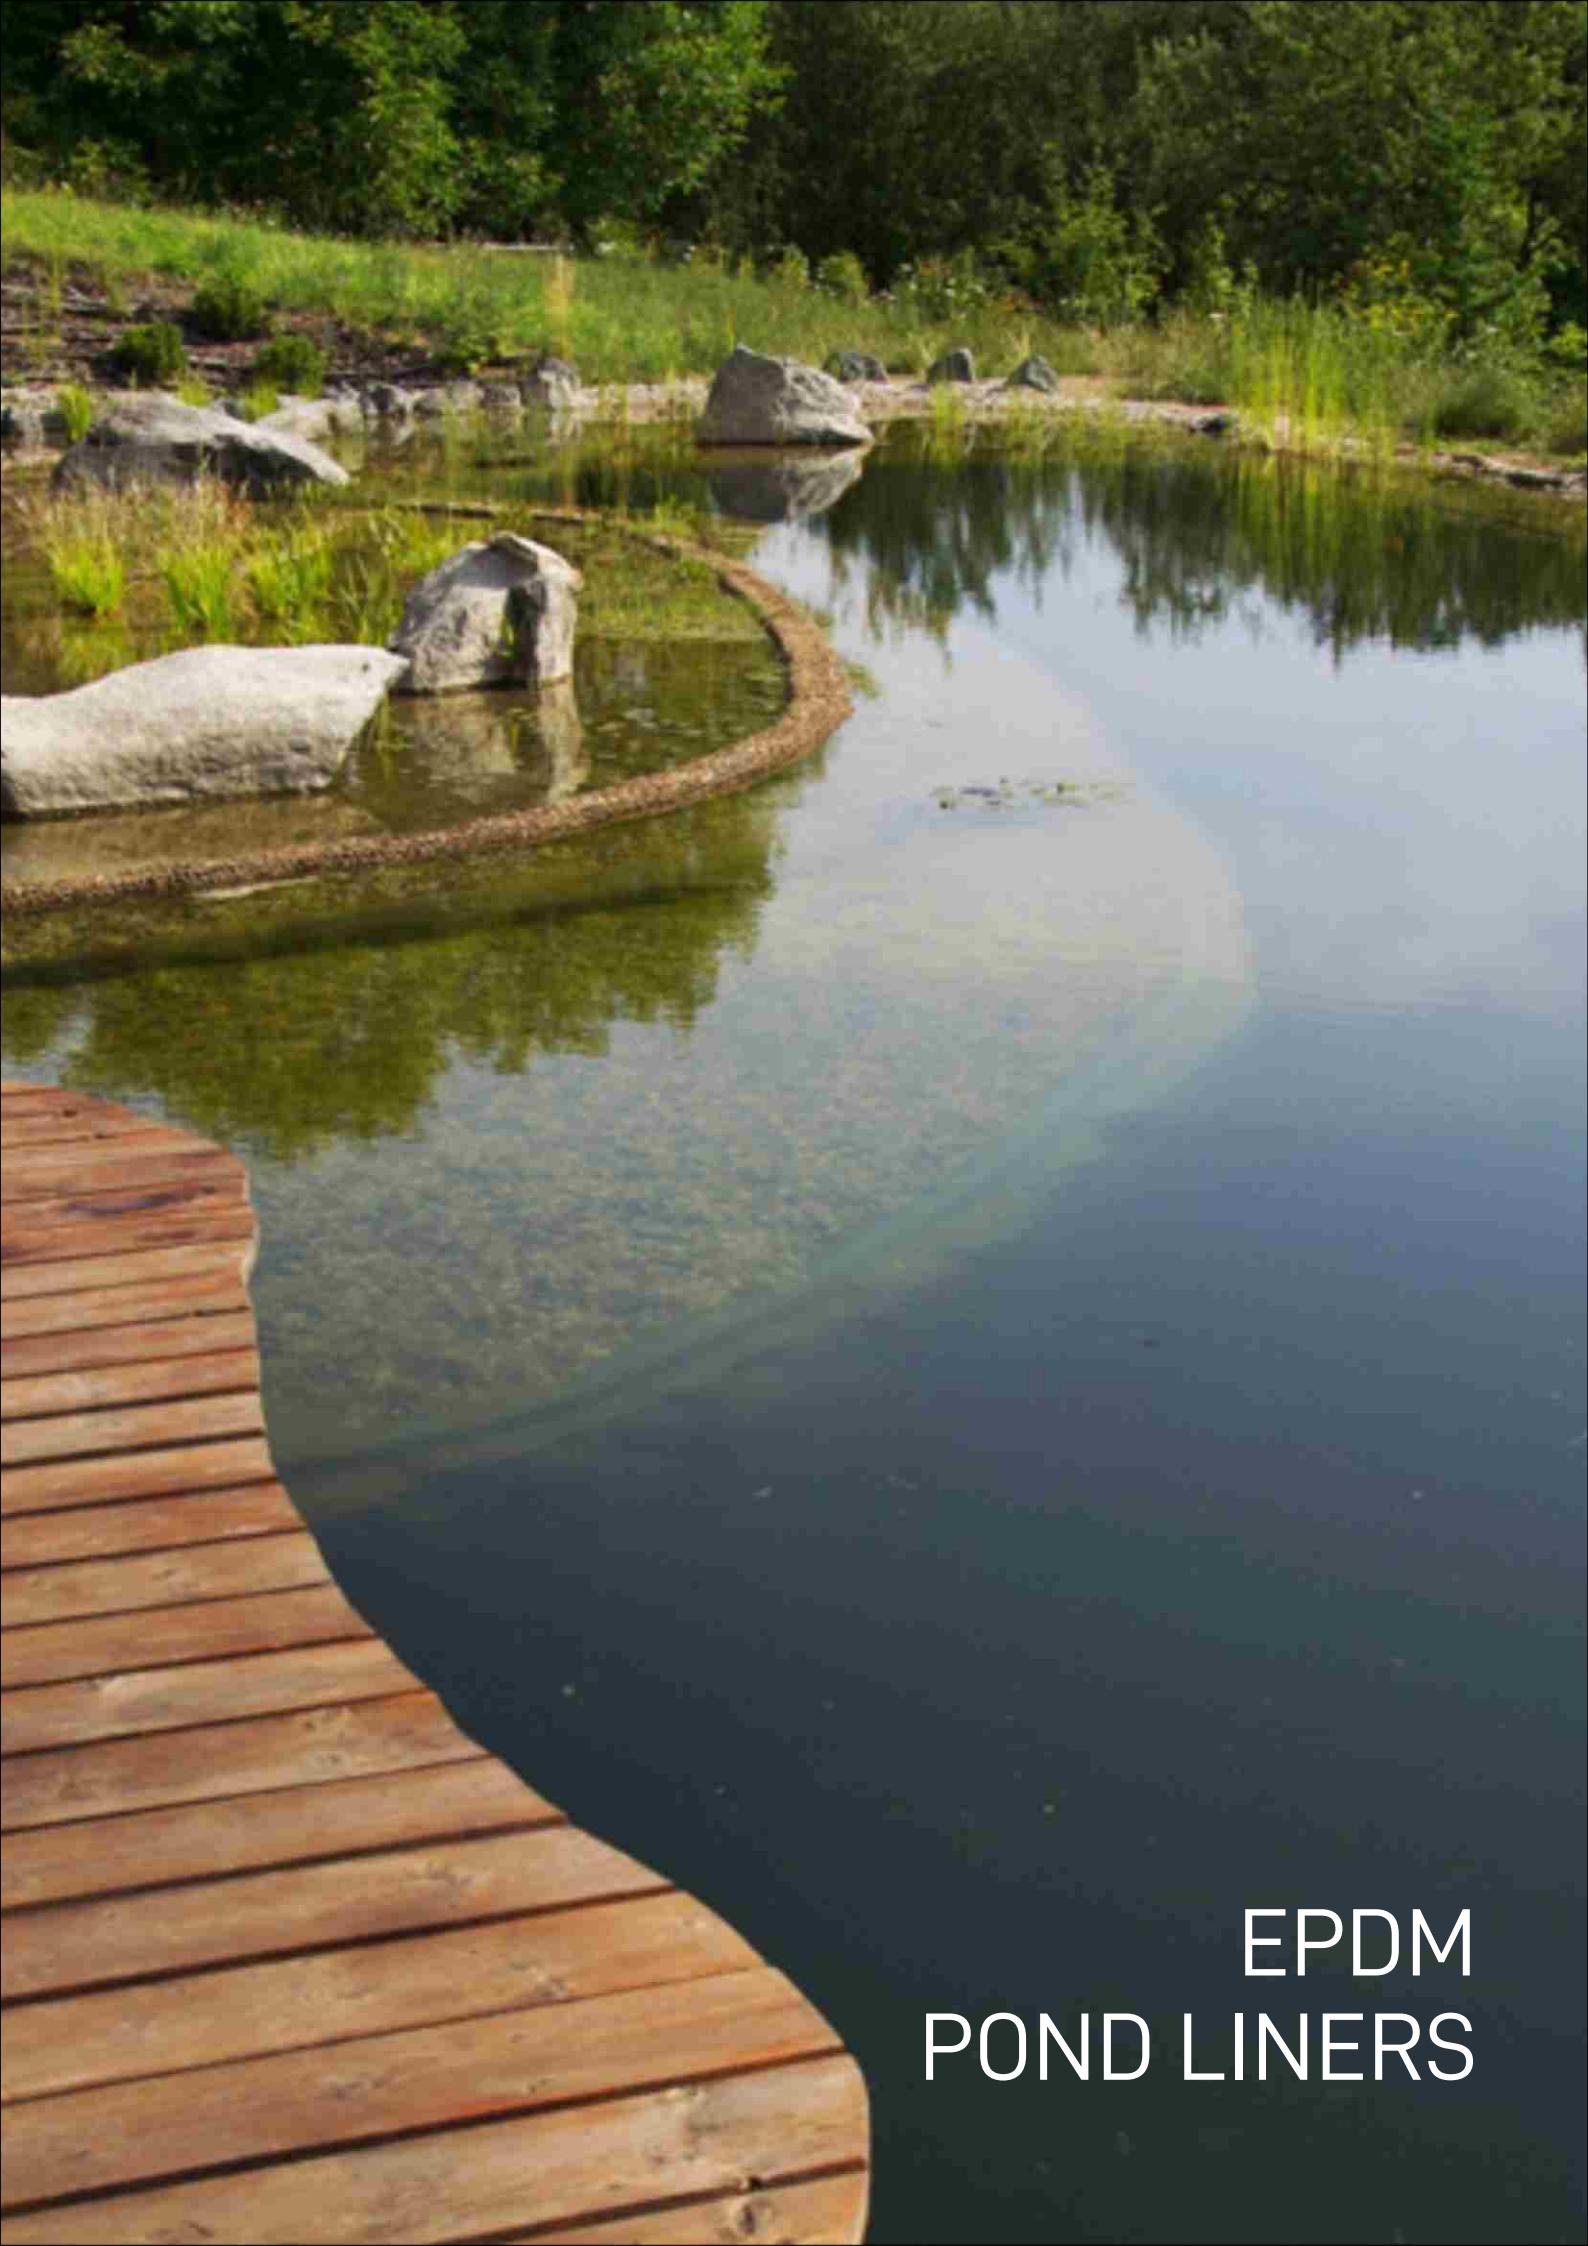

EPDM  
POND LINERS

## EPDM POND LINERS

EPDM Pond Liner is manufactured using Ethylene Propylene Diene Monomer (EPDM) rubber thickness 0.6 mm to 6.0 mm and is used in artificial lakes, ponds and other water bodies.

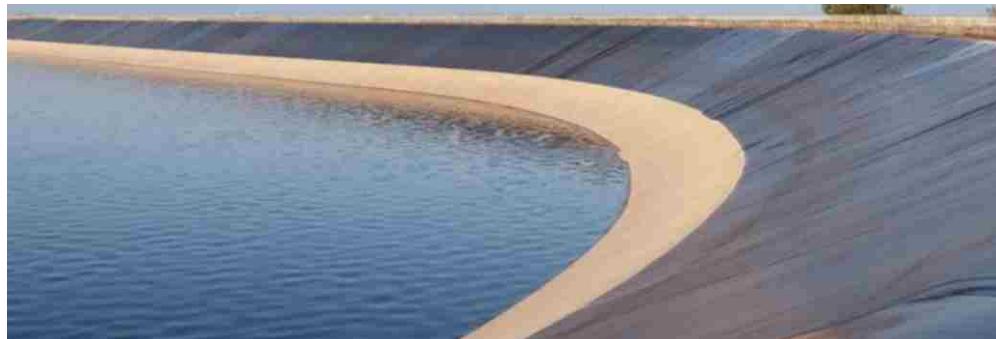

EPDM Liner in a Water Storage Pond




EPDM Liner in a Decorative Pond



EPDM Liner in a Decorative Pond



EPDM Liner in an Industrial Pond

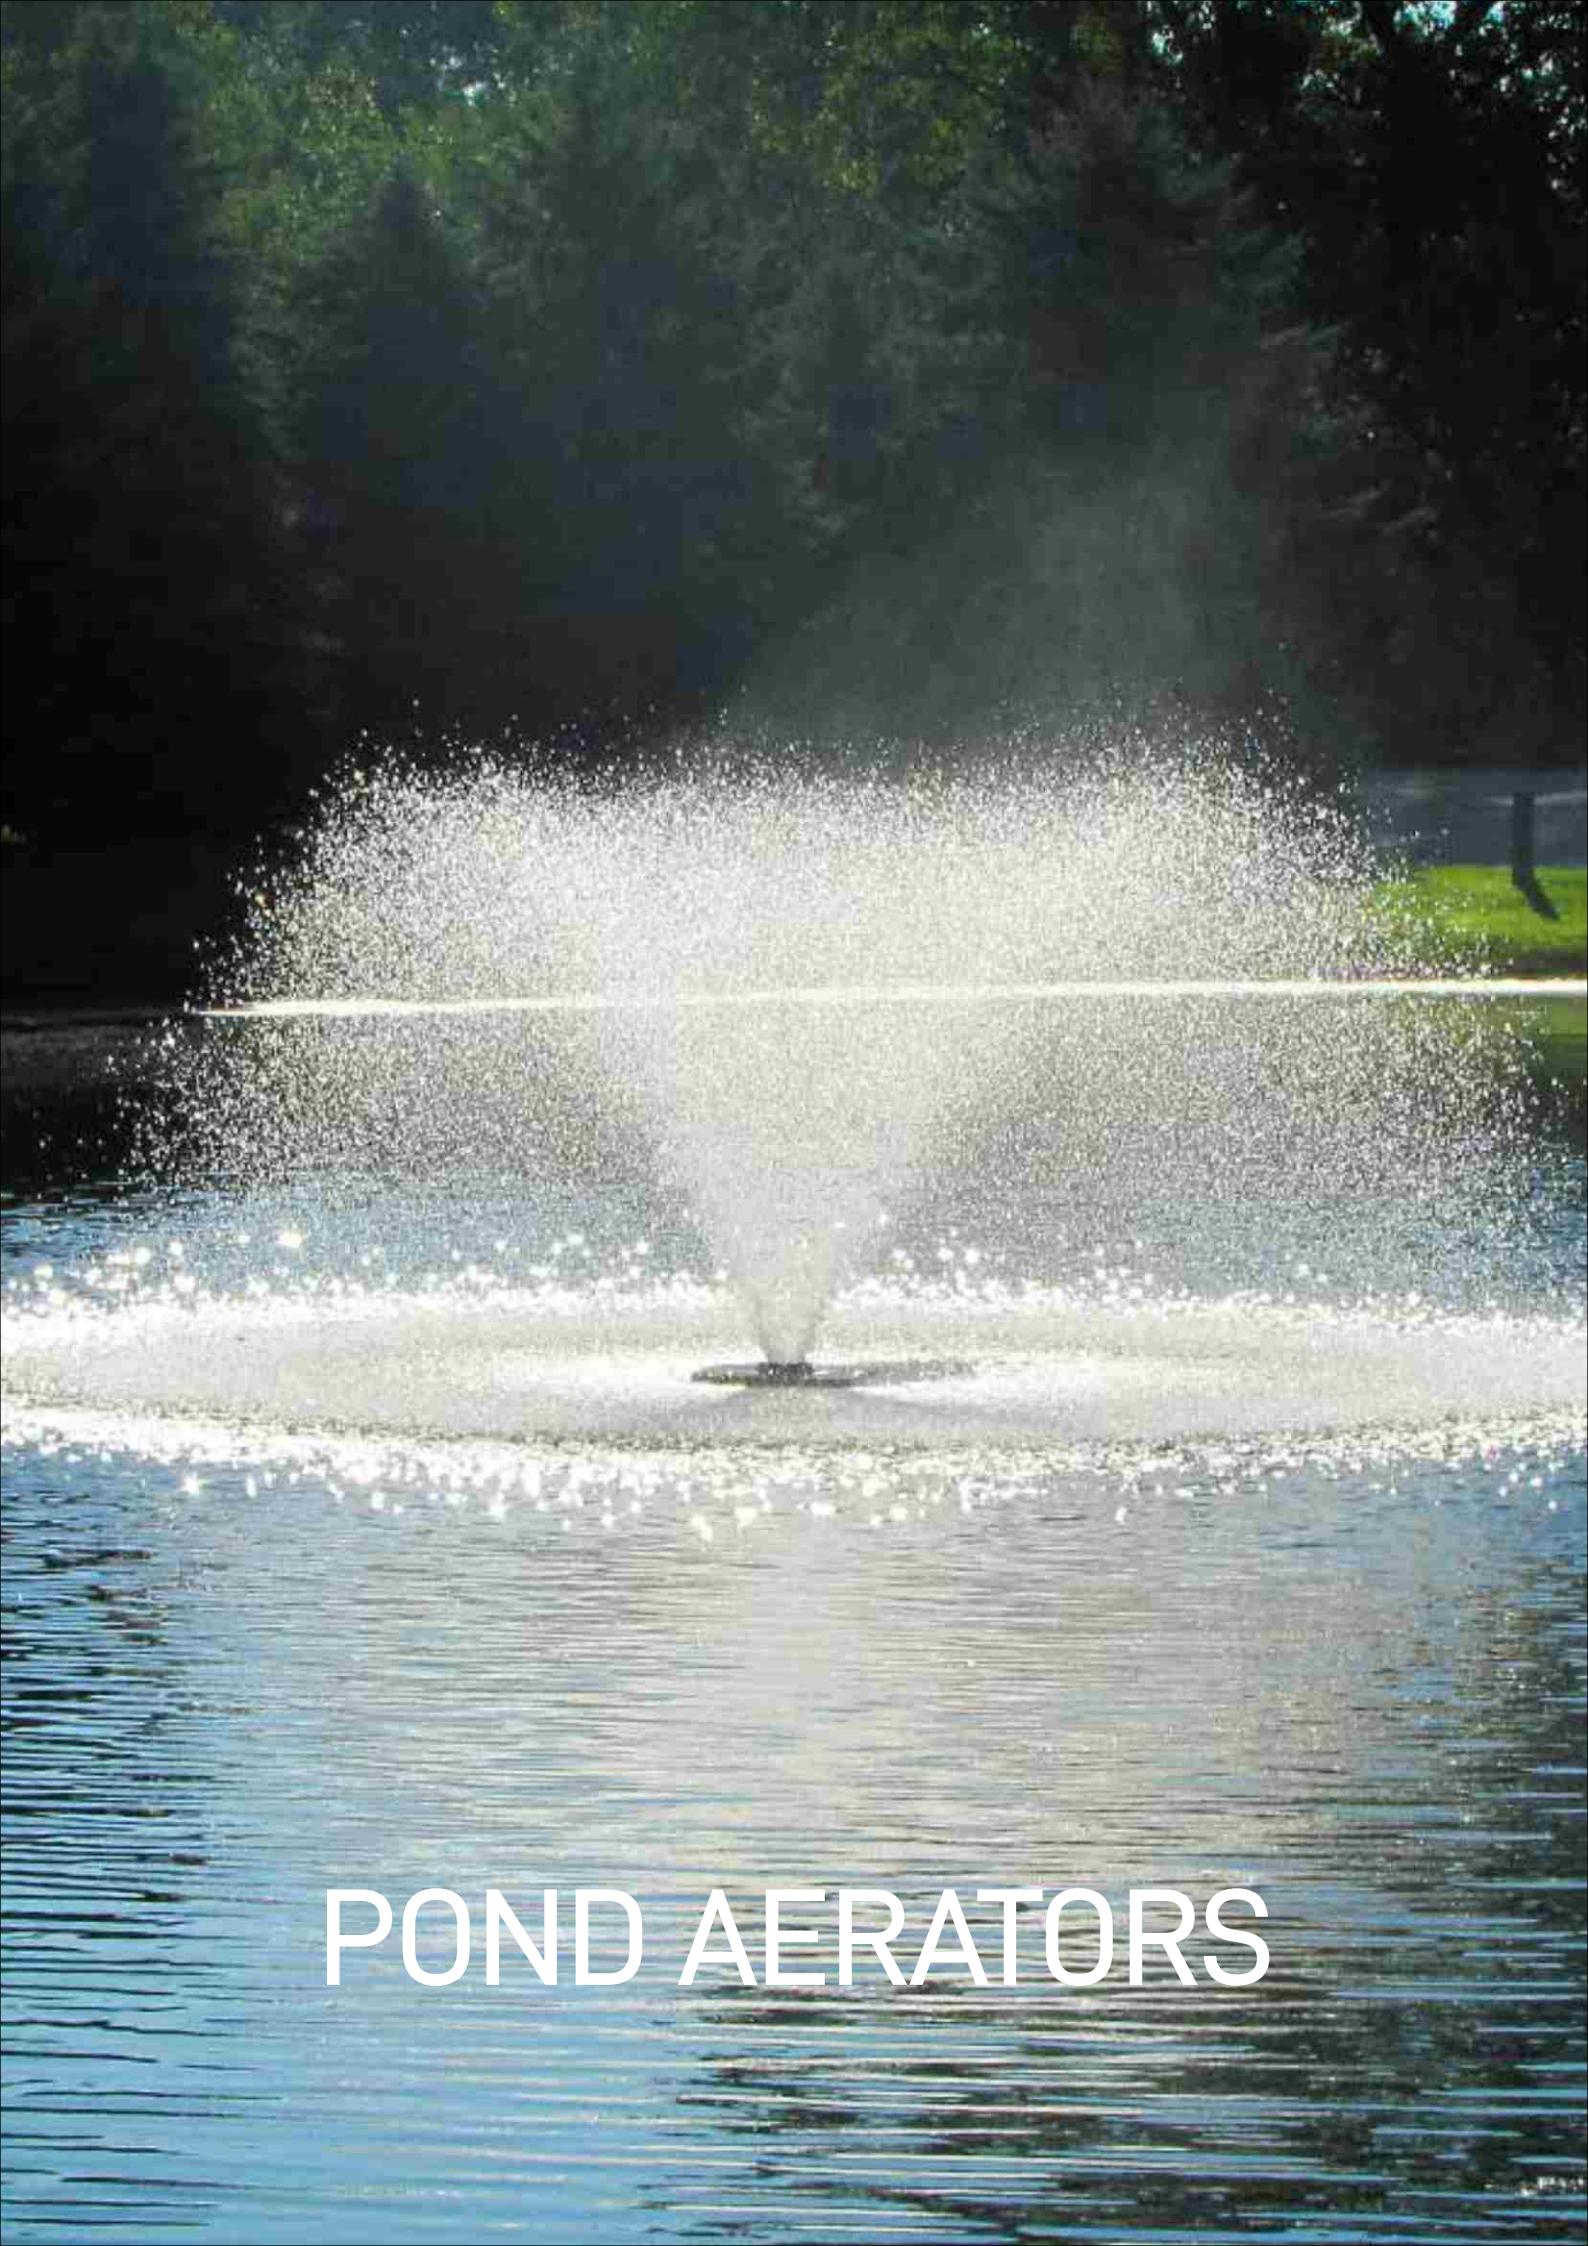A photograph of a pond with a fountain. The fountain is spraying a large, white, misty plume of water high into the air. The water droplets catch the sunlight, creating a bright, glowing effect against the dark green background of trees. The pond's surface is visible at the bottom, showing ripples and reflections.

# POND AERATORS

## POND AERATORS

Water aeration is the process of increasing or maintaining the oxygen saturation of water in both natural and artificial environments. Aeration techniques are commonly used in pond, lake, and reservoir management to address low oxygen levels or algal blooms.



CONSTELLATION AERATING FOUNTAIN




SUNBURST AERATING FOUNTAIN



GEMINI AERATING FOUNTAIN



QUINOX AERATING FOUNTAIN

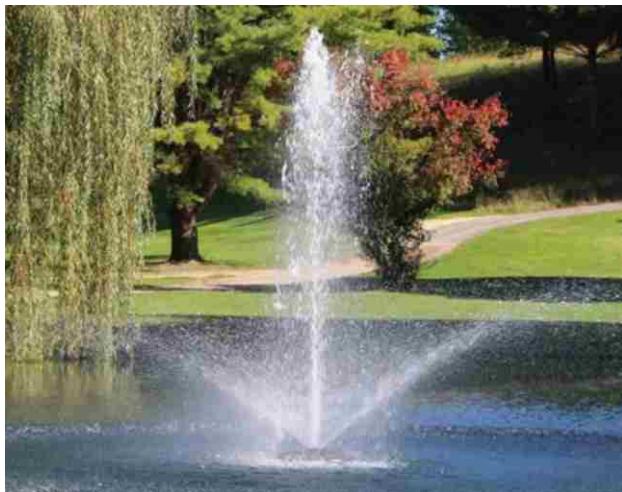

PHOENIX AERATING FOUNTAIN



COMET AERATING FOUNTAIN

# DRINKING WATER FROM AIR



## HYDROCORE F20

The HydroCore F20 Features a compact and minimalist design :

- Multi-Function Touch Screen.
- Counter Top
- 9 Litres Internal Water Tank.
- Monitors and improves air quality.
- Water Tank with see-through glass and UV backlight.



### Specifications:

- Model: HydroCore F20
  - Max. Production: 20 litre/day
  - Tank Volume: 9 litre
  - Operating conditions: 15–43 C
  - Operating Humidity: >25%
  - Rated Voltage: 220VAC
- Frequency: 50 Hz  
Production Power: 400W  
Refrigerant: R134a  
Net Weight: 21kg  
Dimensions: 430x290x660mm

### Premium Mineralised Drinking Water ...

...made 100% from Air. HydroCore Solutions produce pure water, made 100% from the air. Our Advanced Filtration Process Adds minerals and electrolytes producing the ideal source for healthy rehydration that tastes great.

...at Low Cost With No Impact on the Environment

## HYDROCORE P50

The HydroCore P50 Atmospheric Water Generator is a great choice for home or small offices and supports a sustainable and plastic-bottle-free future!


The P50 water generator will produce 50 litres of fresh drinking water out of thin air every day. Perfect match for the water demand for 4 to 8 persons. #savewater #waterfromair

### Features:

- Floor Standing
- Plug and Play
- Cold Water
- 19lt Internal Water Tank
- 50 litre/Day Maximum

### Specifications:

- Model: HydroCore P50
- Max. Production: 50 litre/day
- Tank Volume: 19 litre
- Operating conditions: 15–43 C
- Operating Humidity: >25%
- Rated Voltage: 220VAC
- Frequency: 50 Hz
- Total Power: 1200W
- Refrigerant: R410a
- Net Weight: 49kg
- Dimensions: 400x475x920mm

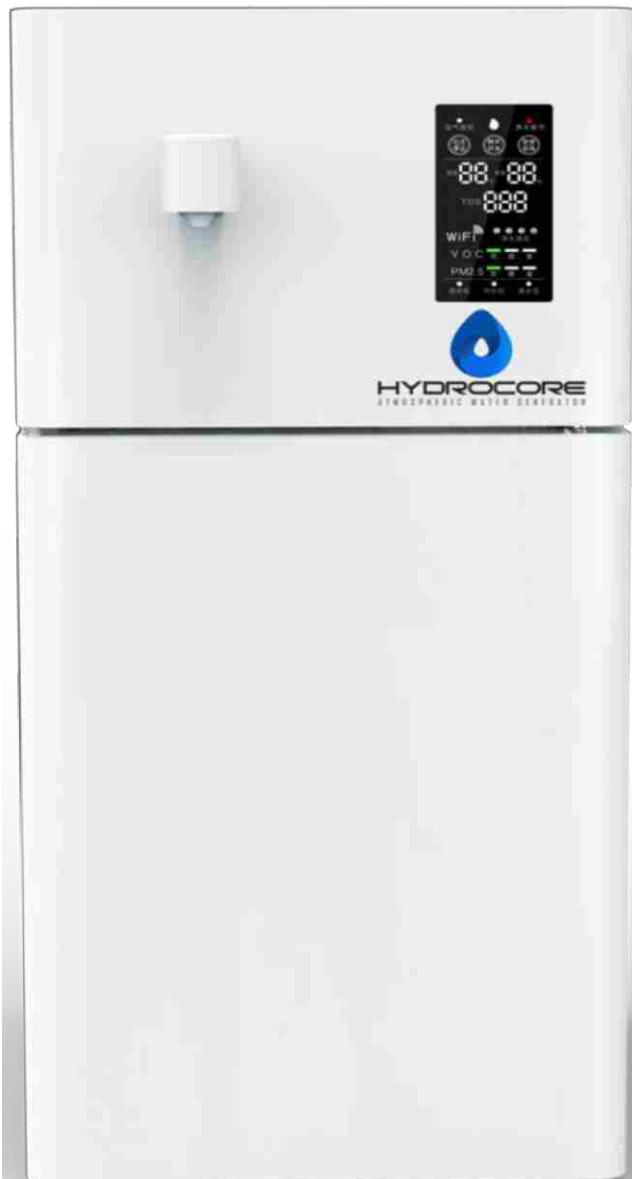

## Notes



**RESIDENTIAL & COMMERCIAL  
IRRIGATION**

## RO ADJUSTABLE NOZZLES

- Adjustable from 0° to 360° for maximum design flexibility
- Easy-grip top for simple adjustment
- Strong edges for a defined pattern with better wind resistance
- Large water droplets minimize misting with better uniformity

**4A**

4' Radius adjustable nozzle.

**12A**

12' Radius adjustable nozzle.

**6A**

6' Radius adjustable nozzle.

**15A**

15' Radius adjustable nozzle.

**8A**

8' Radius adjustable nozzle.

**17A**

17' Radius adjustable nozzle.

**10A**

10' Radius adjustable nozzle.

**Hunter I-25-04 1" Rotor Sprinkler Head**

## RO SPRAY FIXED ARC NOZZLES

- Clean edges for a defined pattern with better wind resistance
- Large water droplets minimize misting with better uniformity
- Sturdy construction ensures reliable performance
- Color-coded for easy field identification

**ARC5**5' Radius fixed Arc nozzle.  
Fixed: 1/4, 1/2, Full**ARC12**12' Radius fixed Arc nozzle.  
Fixed: 1/4, 1/3, 1/2, 2/3, 3/4 Full**ARC8**8' Radius fixed Arc nozzle.  
Fixed: 1/4, 1/3, 1/2, Full**ARC15**15' Radius fixed Arc nozzle.  
Fixed: 1/4, 1/3, 1/2, 2/3, 3/4 Full**ARC10**10' Radius fixed Arc nozzle.  
Fixed: 1/4, 1/3, 1/2, Full**ARC17**17' Radius fixed Arc nozzle.  
Fixed: 1/4, 1/2

**PGJ****PGJ-00**

15' to 37' Radius nozzle.  
Flow: 0.64 to 5.3 GPM  
Overall height: 7"  
Exposed diameter: 1 1/2"  
Inlet size: 1/2"

**PGJ-06**

15' to 37' Radius nozzle.  
Flow: 0.64 to 5.3 GPM  
Overall height: 9 1/2"  
Pop-up height: 6"  
Exposed diameter: 1 1/2"  
Inlet size: 1/2"

**PGJ-04**

15' to 37' Radius nozzle.  
Flow: 0.64 to 5.3 GPM  
Overall height: 7 1/8"  
Pop-up height: 4"  
Exposed diameter: 1 1/8"  
Inlet size: 1/2"

**PGJ-12**

15' to 37' Radius nozzle.  
Flow: 0.64 to 5.3 GPM  
Overall height: 16 3/8"  
Pop-up height: 12"  
Exposed diameter: 1 1/8"  
Inlet size: 1/2"

**SRM****SRM-04**

15' to 30' Radius nozzle.  
Flow: 0.42 to 3.4 GPM  
Overall height: 6 5 / 8 "  
Pop-up height: 4"  
Exposed diameter: 1 1/8"  
Inlet size: 1/2"

- Nozzle choices: 6
- Radius: 15' to 30'
- Flow: 0.42 to 3.4 GPM
- Recommended pressure range: 30 to 50 PSI
- Operating pressure range: 20 to 100 PSI
- Precipitation rate: 0.6 in/hr approximately
- Nozzle trajectory: 14° approximately

**PGJ****SRM-04**

22' to 52' Radius nozzle.  
Flow: 0.5 to 14.1 GPM  
Overall height: 7 3/8"  
Pop-up height: 4"  
Exposed diameter: 1 3/4"  
Inlet size: 3/4"

- Nozzle choices: 27
- Radius: 22' to 52'
- Flow: 0.5 to 14.1 GPM
- Recommended pressure range: 25 to 70 PSI
- Operating pressure range: 20 to 100 PSI
- Precipitation rate: 0.4 in/hr approximately
- Nozzle trajectory: standard = 25°, low-angle = 13°

**PGP ULTRA****PGP-00**

17' to 47' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 7½"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**PGP-04**

17' to 47' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 7½"  
Pop-up height: 4"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**PG-04**

17' to 47' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 17"  
Pop-up height: 12"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**I-20-00**

17' to 46' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 7¾"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**I-20-04**

17' to 47' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 17"  
Pop-up height: 12"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**I-20-06**

17' to 46' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 9¾"  
Pop-up height: 6"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**I-20-12**

17' to 46' Radius nozzle.  
Flow: 0.36 to 14.8 GPM  
Overall height: 17"  
Pop-up height: 12"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**PGP ULTRA & I-20 PRB****PGP-00-PRB**

17' to 46' Radius nozzle.  
Flow: 0.36 to 9.8 GPM  
Overall height: 85/8"  
Exposed  
diameter: 11/4"  
Inlet size: ¾"

**PGP-04-PRB**

17' to 46' Radius nozzle.  
Flow: 0.36 to 9.8 GPM  
Overall height: 8¼"  
Pop-up height: 4"  
Exposed  
diameter: 1¾"  
Inlet size: ¾"

**PGP ULTRA & I-20 PRB****PGJ-00**

15' to 37' Radius nozzle.  
Flow: 0.64 to 5.3 GPM  
Overall height: 7"  
Exposed diameter: 1½"  
Inlet size: ½"

**I-20-00-PRB**

17' to 46' Radius nozzle.  
Flow: 0.36 to 9.8 GPM  
Overall height: 8¼"  
Pop-up height: 4"  
Exposed diameter: 1¾"  
Inlet size: ¾"

**1" PGV & PGV JAR-TOP****PGV-100G**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 1"  
Height: 5"  
Length: 4½"  
Width: 2½"

**PGV-100JT-G**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 1"  
Height: 5"  
Length: 4½"  
Width: 2½"

**PGV-101G**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 1"  
Height: 5"  
Length: 4½"  
Width: 2½"

**PGV-101JT-G**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 1"  
Height: 5½"  
Length: 4½"  
Width: 3¼"

**PGV - ASV****PGV-075-ASV**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: ¾"  
Height: 5½"  
Length: 5¾"  
Width: 2½"

**PGV-101-ASV**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 1"  
Height: 5½"  
Length: 6 1/4"  
Width: 2½"

**1 ½" % 2" PGV****PGV-151**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 1½"  
Height: 7½"  
Length: 5¾"  
Width: 4½"

**PGV-201**

Flow: 0.2 to 40 GPM  
Recommended pressure range: 20 to 150 PSI  
Inlet diameter: 2"  
Height: 8"  
Length: 6¾"  
Width: 5¼"

1 1/2" % 2" PGV



**HQ - 3RC**  
3/4" Quick coupler



**HQ - 5RC**  
3/4" Quick coupler

## LANDSCAPE ENGINEERING PRODUCTS



**HCDC01**  
Drain Cells"



**HCSLC01**  
Wood Plastic Composite  
Single Layer Cladding




**HCPV01**  
Pavers



**HCDLC01**  
Wood Plastic Composite  
Double Layer Cladding



**HCDB01**  
Dimple Board



**X - CORE**  
2, 4, 6, or 8 Station  
Controller



**HCDC01**  
Wood Plastic Composite  
Hollow Profile




**X2**  
4, 6, 8, or 14 Station  
Controller



**HCDC02**  
Wood Plastic Composite  
Solid Decking



**PRO - C**  
4 to 16 Station Controller

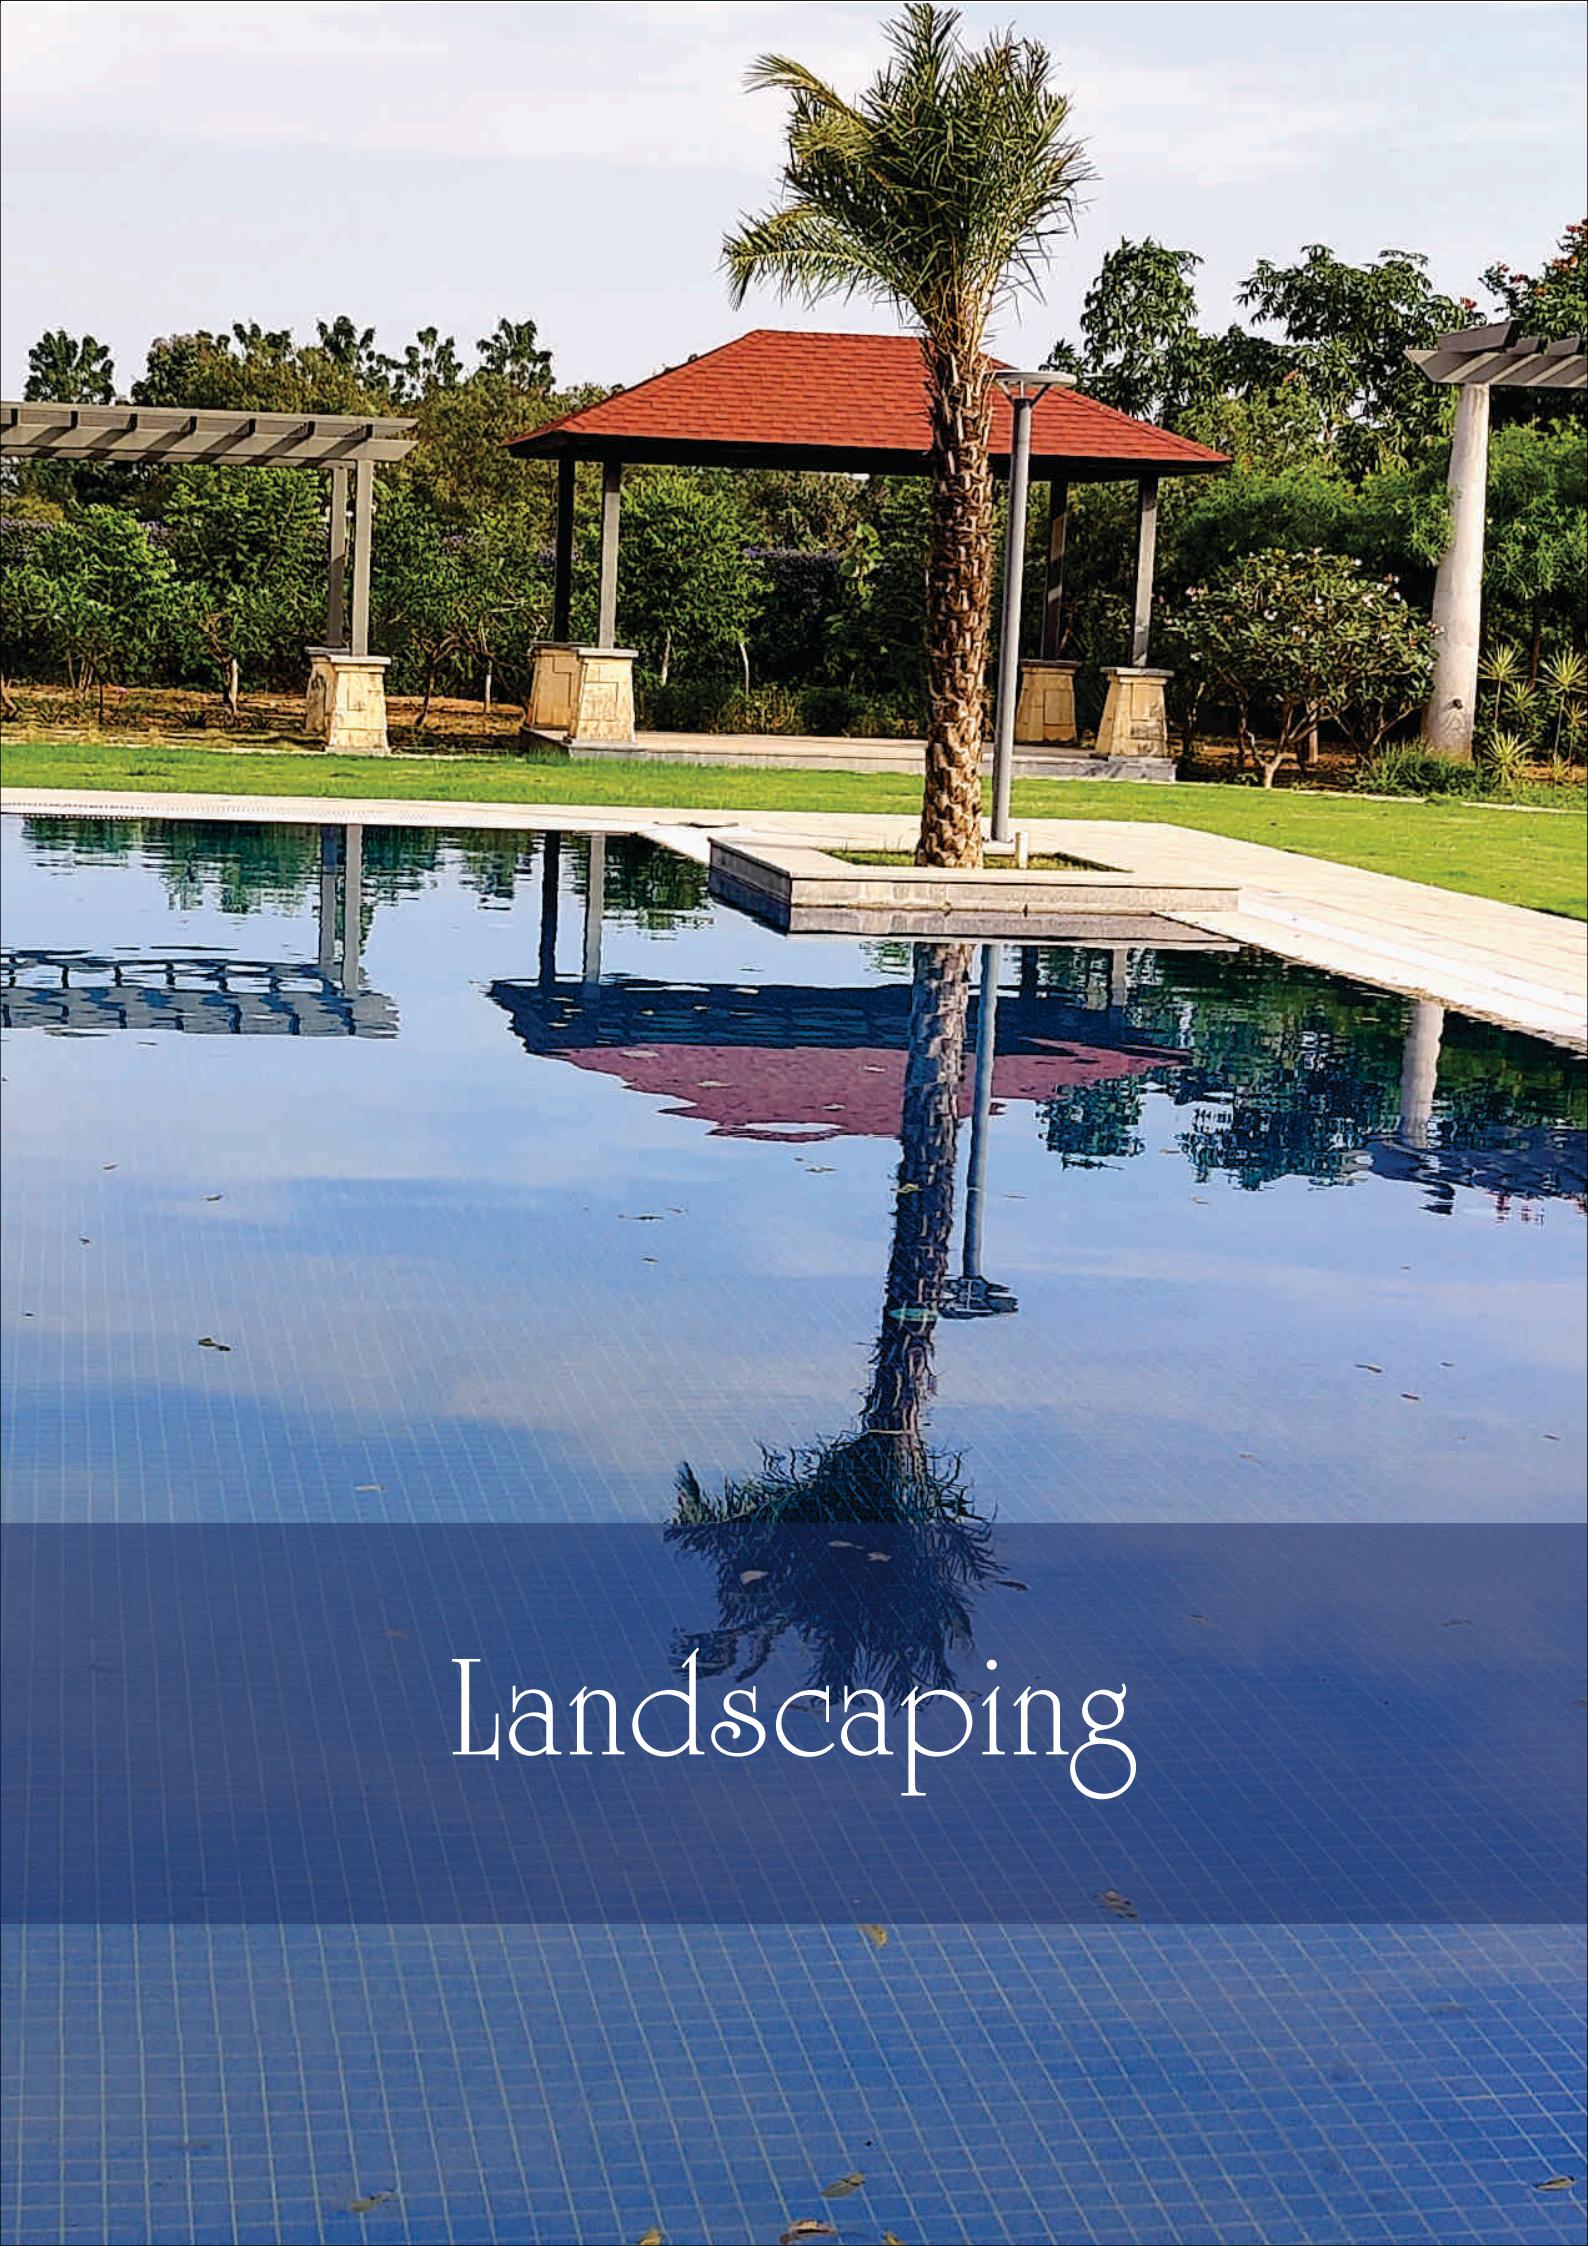A photograph of a swimming pool with a palm tree reflected in the water. In the background, there is a gazebo with a red roof and a wooden deck. The sky is clear and blue.

Landscaping

## Plantations & lawn with Stepping stone



## Terrace Garden



## Stepping stones



## Stepping stones



## Water Feature & Pond



## Gazebo



## Pergola Design



## Landscape engineering products

Artificial grass, or artificial turf, is a synthetic surface. That imitates natural grass. It was originally used for, Sports fields to replace natural grass but nowadays is also used in playgrounds, gardens and for landscaping



## OUTDOOR PLAY GROUND EQUIPMENT



ACURA-E



ALBURY-E



ASPIRE-E



BOGOTA-E




GWAZI



FIORANO

OUTDOOR FITNESS EQUIPMENT



BACK MASSAGER STATION



DOUBLE HEALTH WALKER



MINI SKI



SIT UP STATION



SQUAT PUSHING




WAIST TWISTER



BICYCLE



RIDER

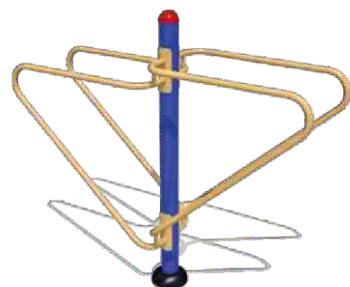

PUSH UP AND DIP STATION



SEATED CHEST PRESS



TWIST STRETCHER



PULL DOWN CHALLENGER

A photograph of a steam room interior. On the left, a large wooden bucket filled with ice cubes sits on a curved wooden bench. In the background, there are more wooden benches and a wall made of stacked stones. The room has a warm, wooden atmosphere with recessed lighting.

# STEAM & SAUNA

People all over the world have always enjoyed heat in different ways, using everything from saunas and steam rooms to banyas and hammams to feel better, look better and to spend time relaxing with loved ones. The modern sauna of today merges a lot of these traditions, bringing all the benefits of heat and steam into your home- so you can enjoy them daily.

**STEAM & SAUNA****Steam Generator**

Steam Generator Standard Features & Advantage:-

Stainless steel reservoir.

Heavy duty heating element.

Electronic water-level control system.

Safety valve for extra precaution.

Built-in low voltage protector.

Available in 4Kw, 6Kw, 7.5Kw, 8Kw, 9Kw, 10Kw, 12Kw, 13.5Kw, 15Kw, 16.5Kw, 18Kw., 19.5Kw, & 21.5Kw, 22Kw.

**Sauna Heater**

Features and Advantages:-

Stainless steel outer casing of the heater.

Operating Switches are placed on the upper part on the side of the heater.

Sauna heater is suitable for dry or wet saunas.

Heavy duty electrical elements and long durability.

Easy to install

Fast warm - up due to vented body design.

**Benefits:-**

Relieves congestion.

Relaxes from overworked muscles.

Deeply clean and moisturizes the skin.

Detox your body.

It makes you feel mentally/physically relaxed









**Sauna Room & Accessories**

A sauna is a small size of room can be heated at very high temperature, with well control humidity. The health benefit and therapeutic value saunas provide have been known for countries. Halbert offers a range of saunas to help relax and improve overall health as well as promote well being. Saunas are also used for recreational purpose. Standard residential sauna sizes are- 5x7' & 6'x7'. Top bench should be 7' long.

## STEAM & SAUNA



## SEATING ARRANGEMENTS

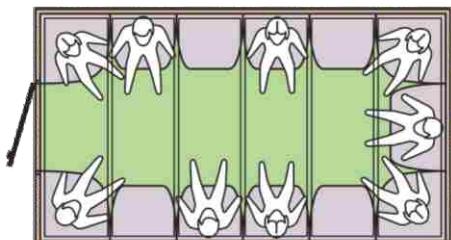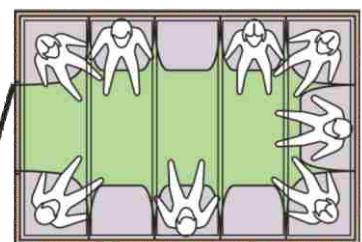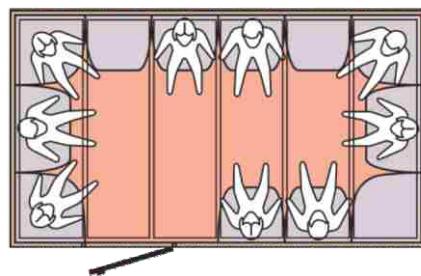

## STEAM & SAUNA

### UNDER BENCH SAUNA HEATER

- Special invisability design, higher effeciency
- Incloy 840 heat element with independent sauna rock holder and special rainer.
- Long quality guarantee-two year.
- Interlegient controller with separete control box, 2 sets of independant contacts for the thermostatic control and the thermal cut out.
- Temp setting 50 -110°C or 122 - 230°F.
- Intelligent Sequential heating system, double over heat protextion system for both sauna room and sauna heater.
- LED diagnostic system, Inetrlock function comply with the new CE Standard






Spa





**SPA****ADVANCED RANGE**

A range of spas intended for the most demanding users. Ergonomic spas, with numerous features and configuration settings.

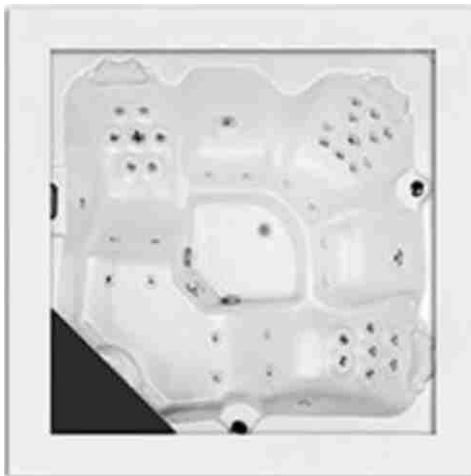**ATLANTIDA 70****EVOLUTION 70****OCEAN 70****PASAFIC 70****PURE****PURE ERGO**

**SWIMSPA RANGE**

Versatile, powerful and compact. A health and wellness center available all year round.

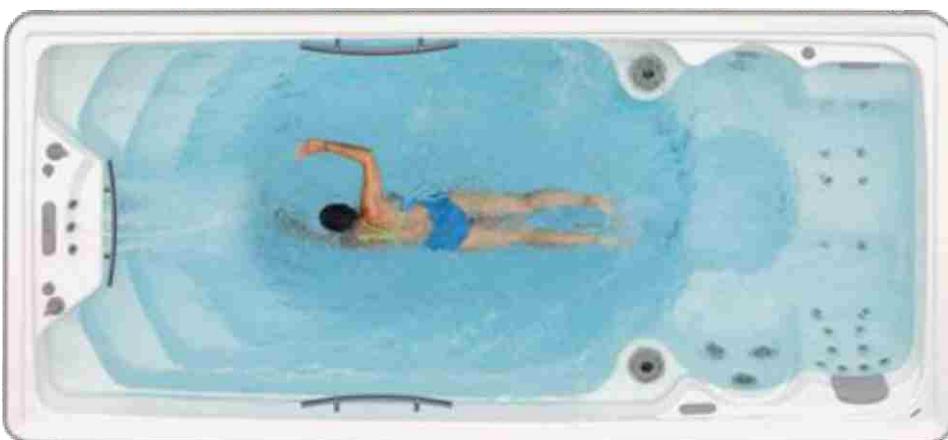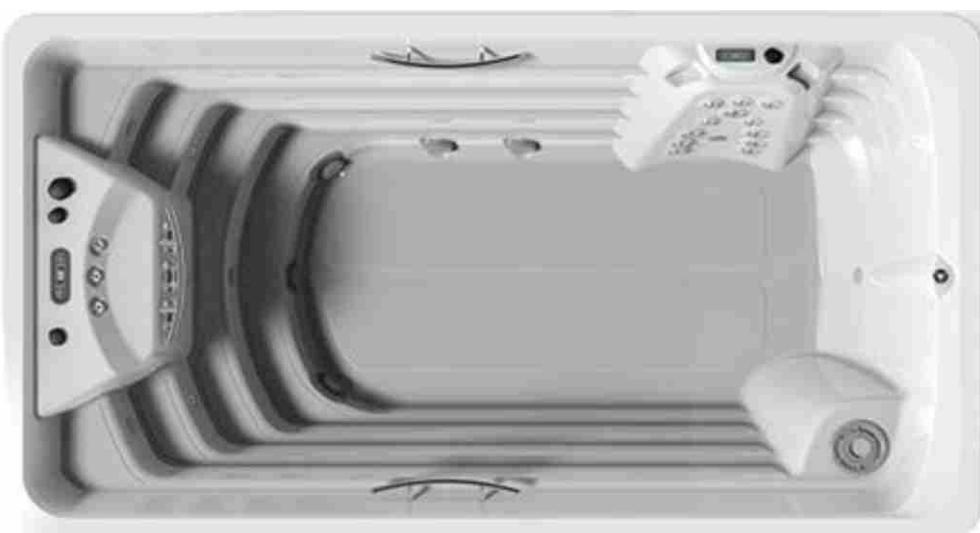**SWIMSPA CRETA****SWIMSPA MEDITERRANEA****SWIMSPA COMPACT**

**SPA****ESSENTIAL**

This range seeks to strike a balance between functionality, performance and cost.

**SELECT****EMOTION****EQUILIBRE****CORNER**

# SPA

## ESSENTIAL

Spas designed for commercial spaces, wellness centres, hotels...A wide range of options and finishes that cover all needs.



VERONA



TOKYO



WELLMAX



ROMA



OLYMPIA

**SPA****POOLSIDE LOUNGERS & FURNITURE**

This range seeks to strike a balance between functionality, performance and cost.



RLI - 0212



RLI - 0213



RLI - 0214



RLI - 0215



RLI - 0216



RLI - 0217



RLI - 0218



RLI - 0219

## POOLSIDE & GARDEN FURNITURE



RLI - 0220



RLI - 0221



RLI - 0223




RLI - 0224




RLI - 0225



RLI - 0226




RLI - 0312



RLI - 0313




RLI - 0314



RLI - 0315




RLI - 0316




RLI - 0317




RLI - 0318



RLI - 0319



RLI - 0320



RLI - 0321




RLI - 0322



RLI - 0323

## SWIMMING POOL TILE DESIGNS




SIZE: 10'x9'



SIZE: 7'x8'



SIZE: 13'x12'



SIZE: 6'x4'



SIZE: 6'x5'



SIZE: 10'x11'






SIZE: 10'x10'

# OUR COMPLETED PROJECTS





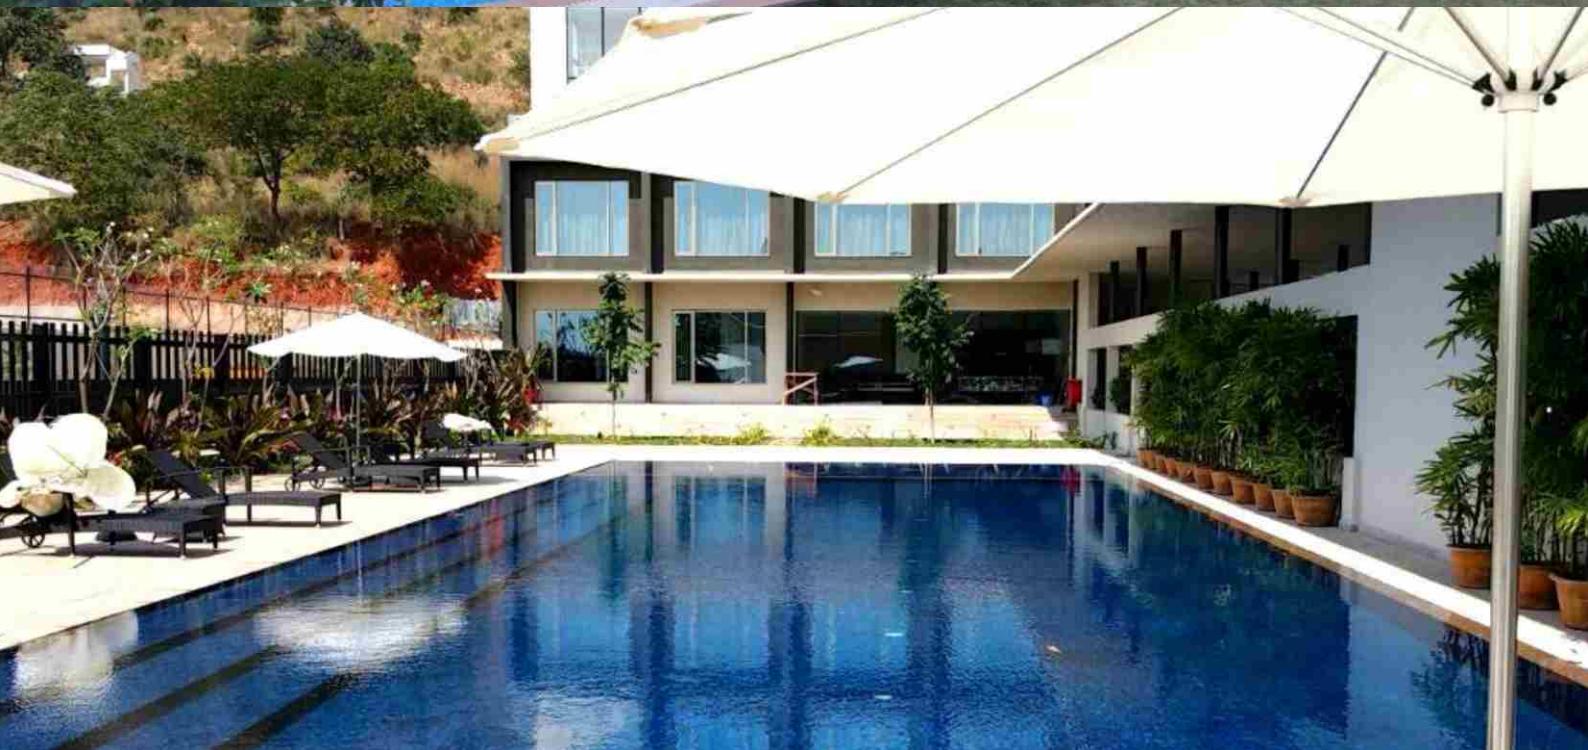

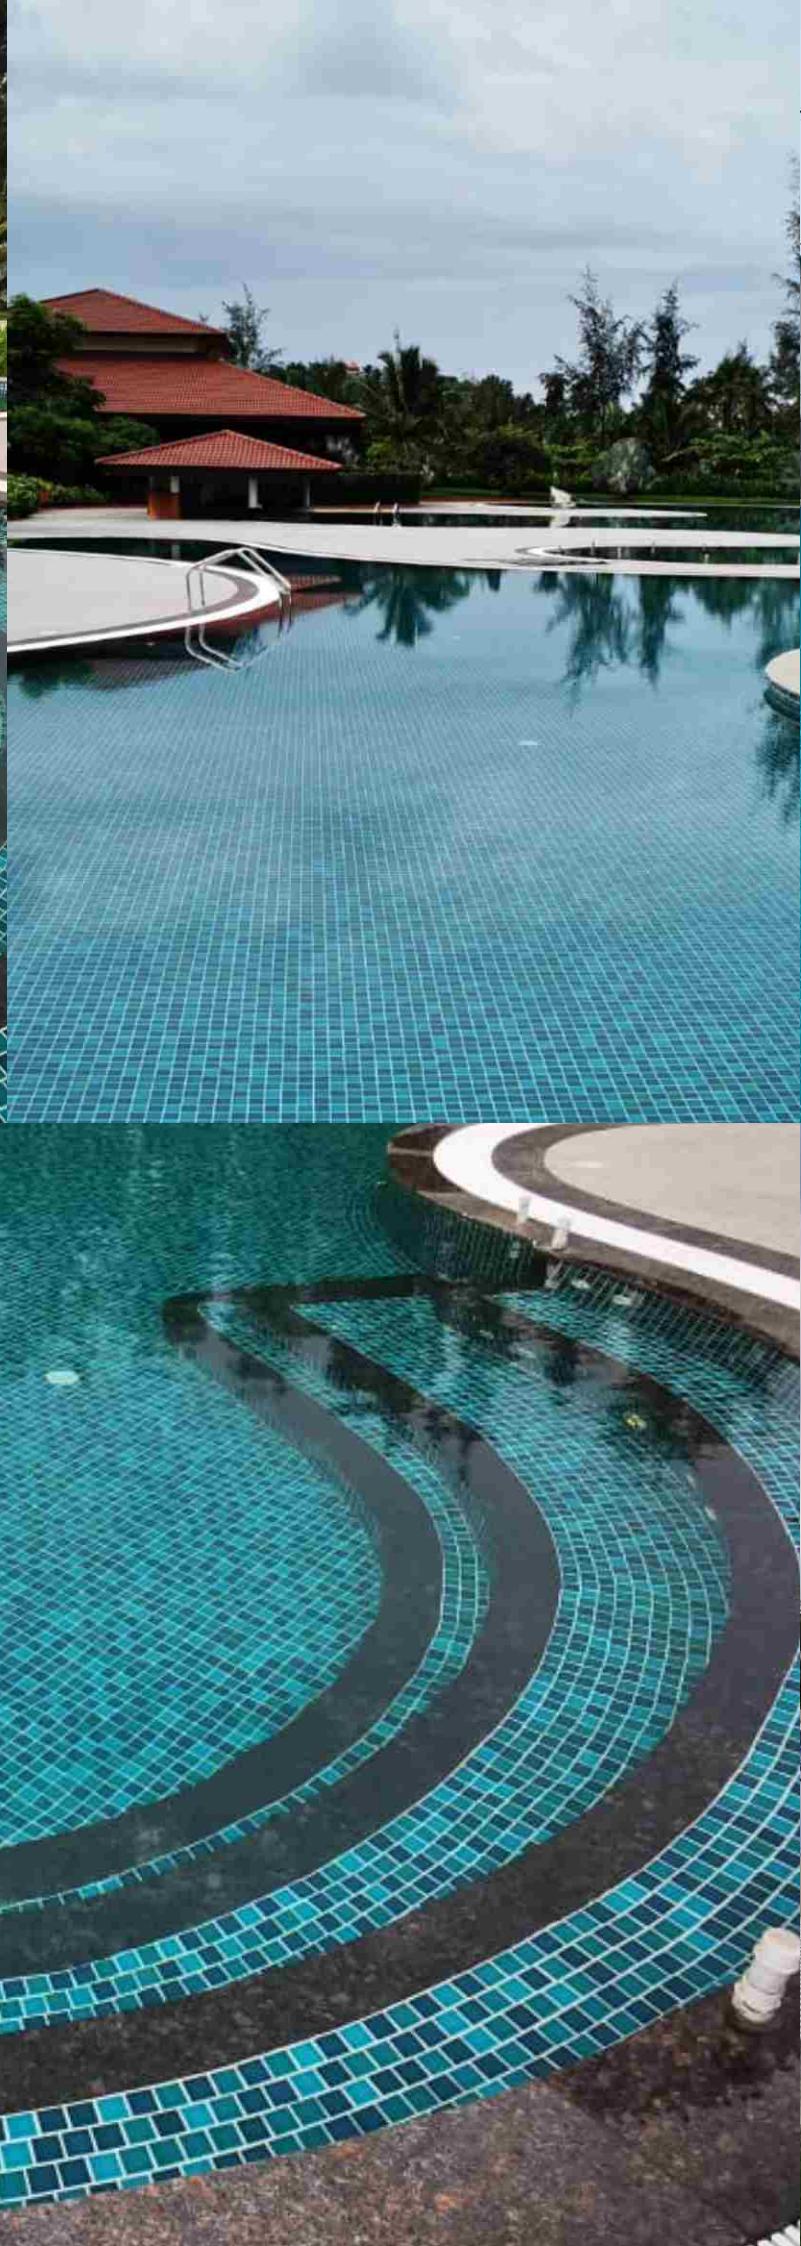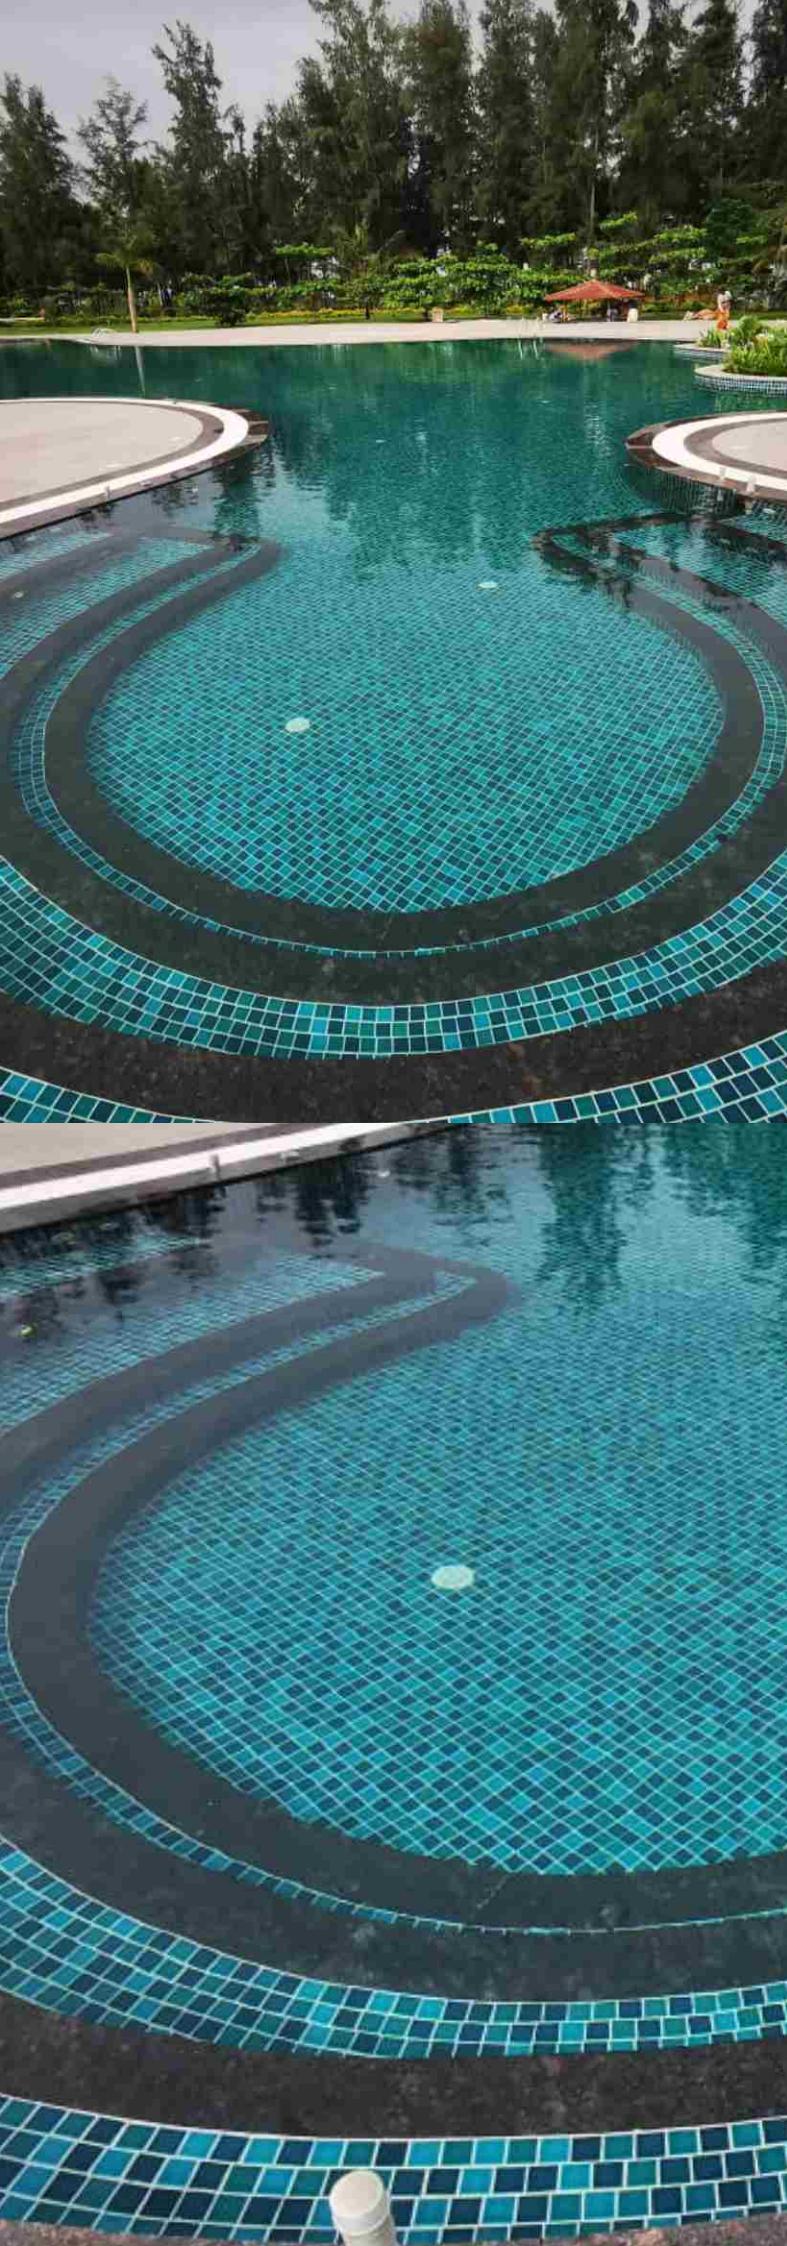











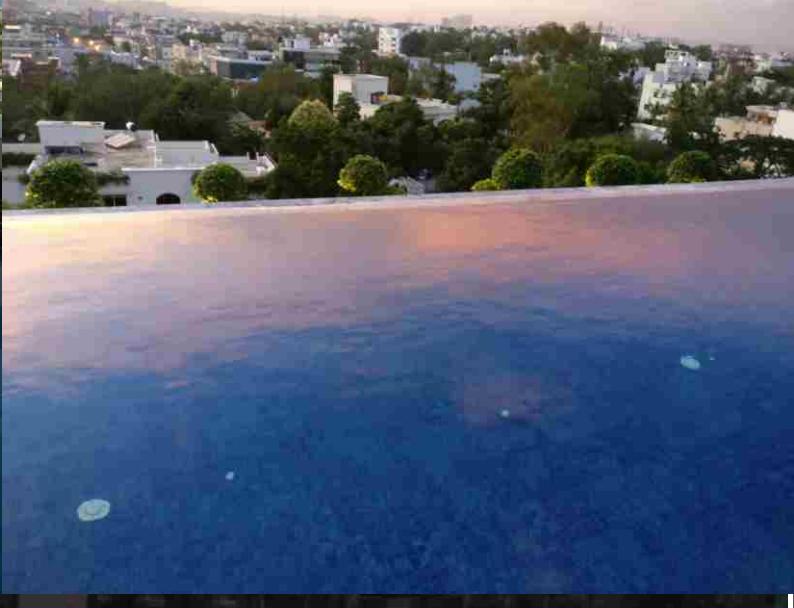

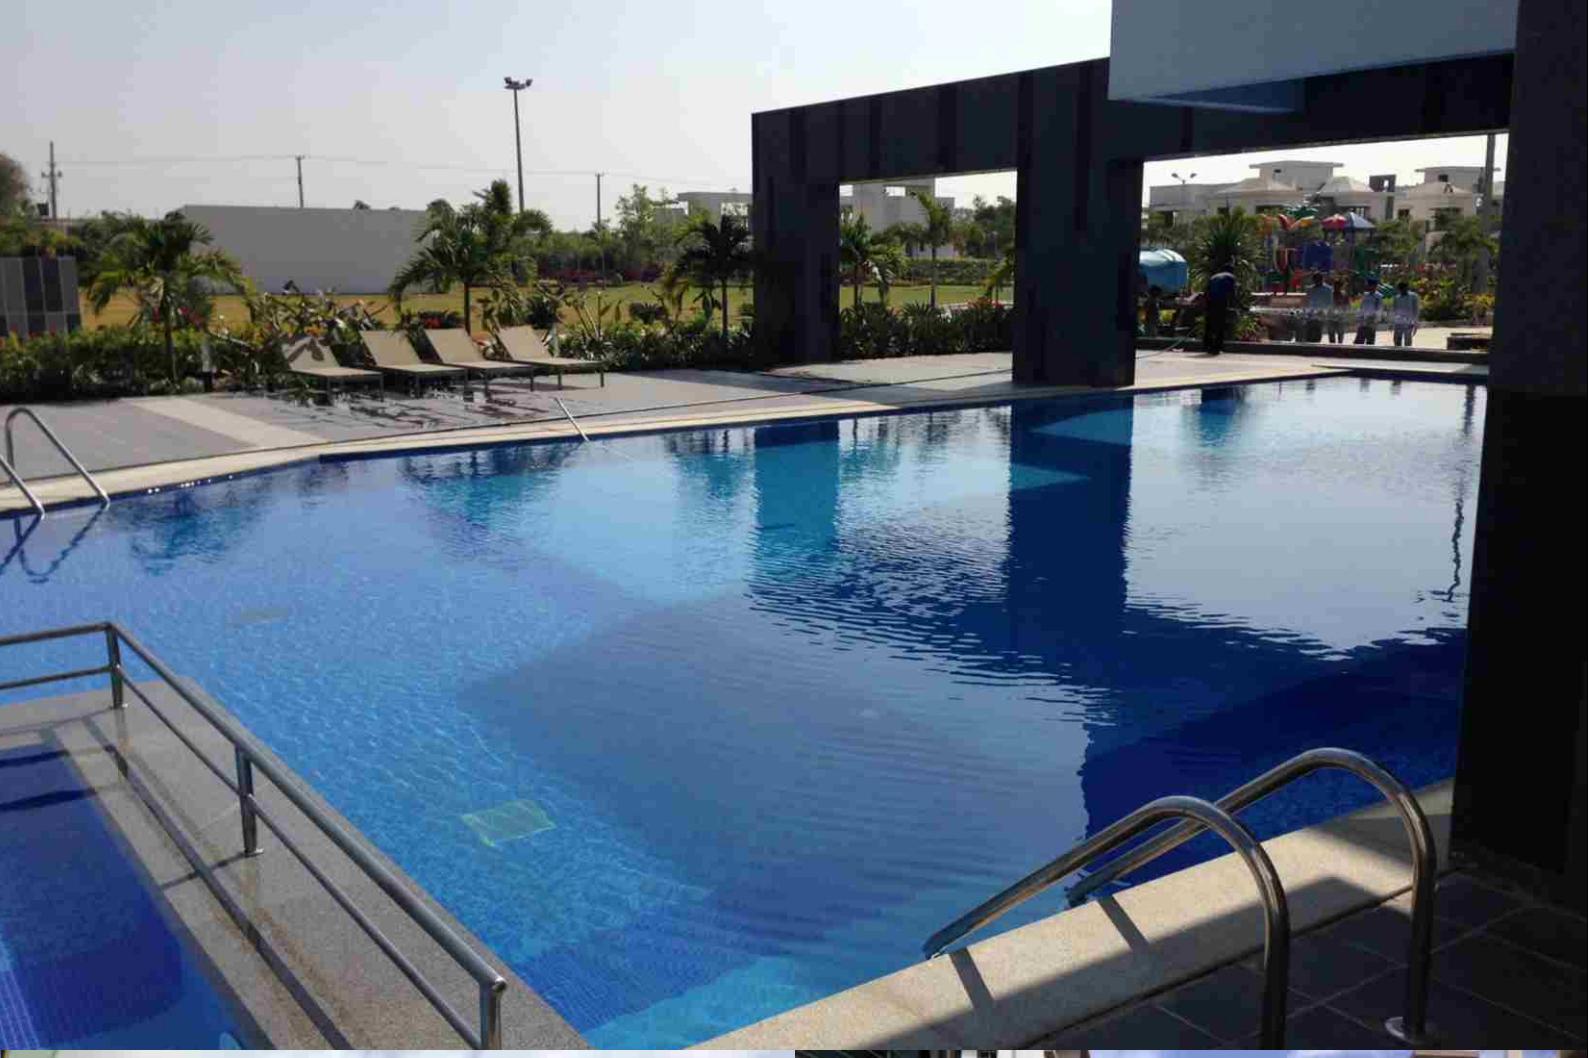





## LIST OF PARTNERS

 PENTAIR

 HAYWARD®

 Oase®  
LIVING WATER

 FLUIDRA  


 ASTRALPOOL®  
FLUIDRA GROUP

 Certikin

 CEPEX®

 Hunter®

 TORO®

 GRUNDFOS

 RAIN BIRD

 Orbit®

 AQVA STAR

 POLYGOMMA

 HORNER EXPRESS  
WORLDWIDE

 OTTERBINE  
BAREBO, INC.

## Notes

## Notes

## **Bangalore**

No:1, 1st Floor, Deepa Tower, Esther Enclave  
(next To Jayanthi Nagar) Horamavu, Bangalore - 560 043

## **Hyderabad**

#101/a, Gf, Road # 70, Journalist Colony, Jubilee Hills,  
Hyderabad - 500033

## **Goa**

No. 103, 1<sup>st</sup> Floor, Grand Caveria Ocean Park Residency,  
Dona Paula, Goa – 403004

## **Rajasthan**

No. 6, Imertiya Bera , Paota C Road, Near Krishna Dairy,  
Jodhpur, Rajasthan – 342001

An associate of

 +91 9845057127, +91 9663000039

 ram@rliindia.com

 www.rliindia.com

