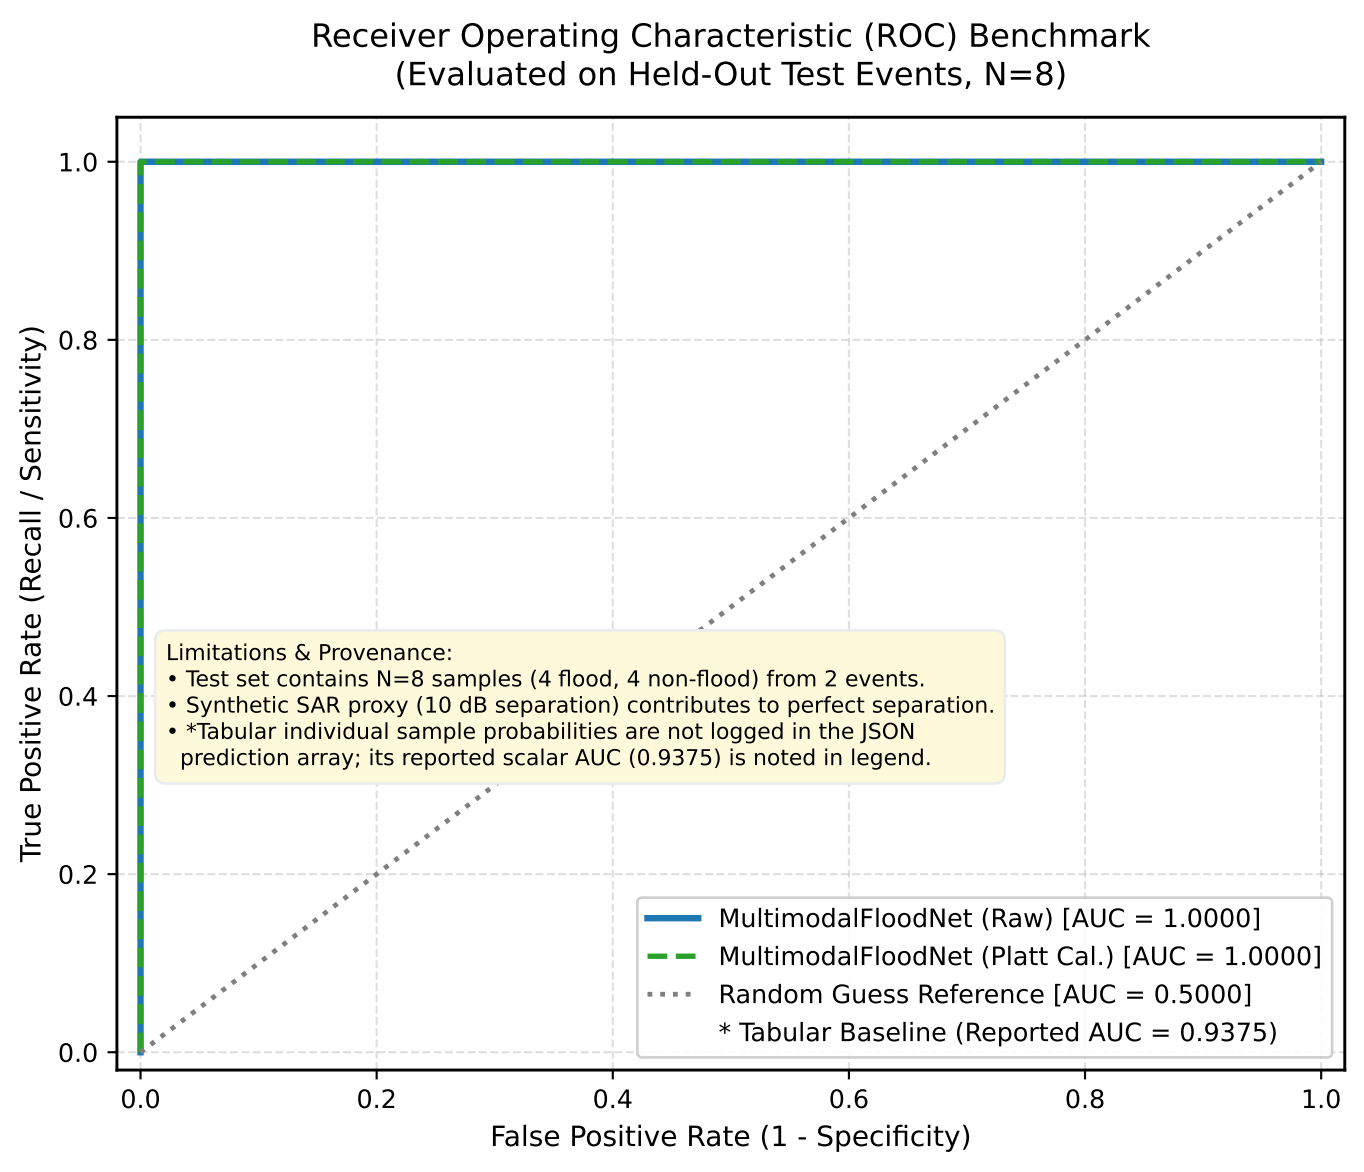
Receiver Operating Characteristic (ROC) Benchmark
(Evaluated on Held-Out Test Events, N=8)
True Positive Rate (Recall / Sensitivity)
False Positive Rate (1 - Specificity)
0.0
0.2
0.4
0.6
0.8
1.0
Limitations & Provenance:
• Test set contains N=8 samples (4 flood, 4 non-flood) from 2 events.
• Synthetic SAR proxy (10 dB separation) contributes to perfect separation.
• *Tabular individual sample probabilities are not logged in the JSON prediction array; its reported scalar AUC (0.9375) is noted in legend.
MultimodalFloodNet (Raw) [AUC = 1.0000]
MultimodalFloodNet (Platt Cal.) [AUC = 1.0000]
Random Guess Reference [AUC = 0.5000]
* Tabular Baseline (Reported AUC = 0.9375)