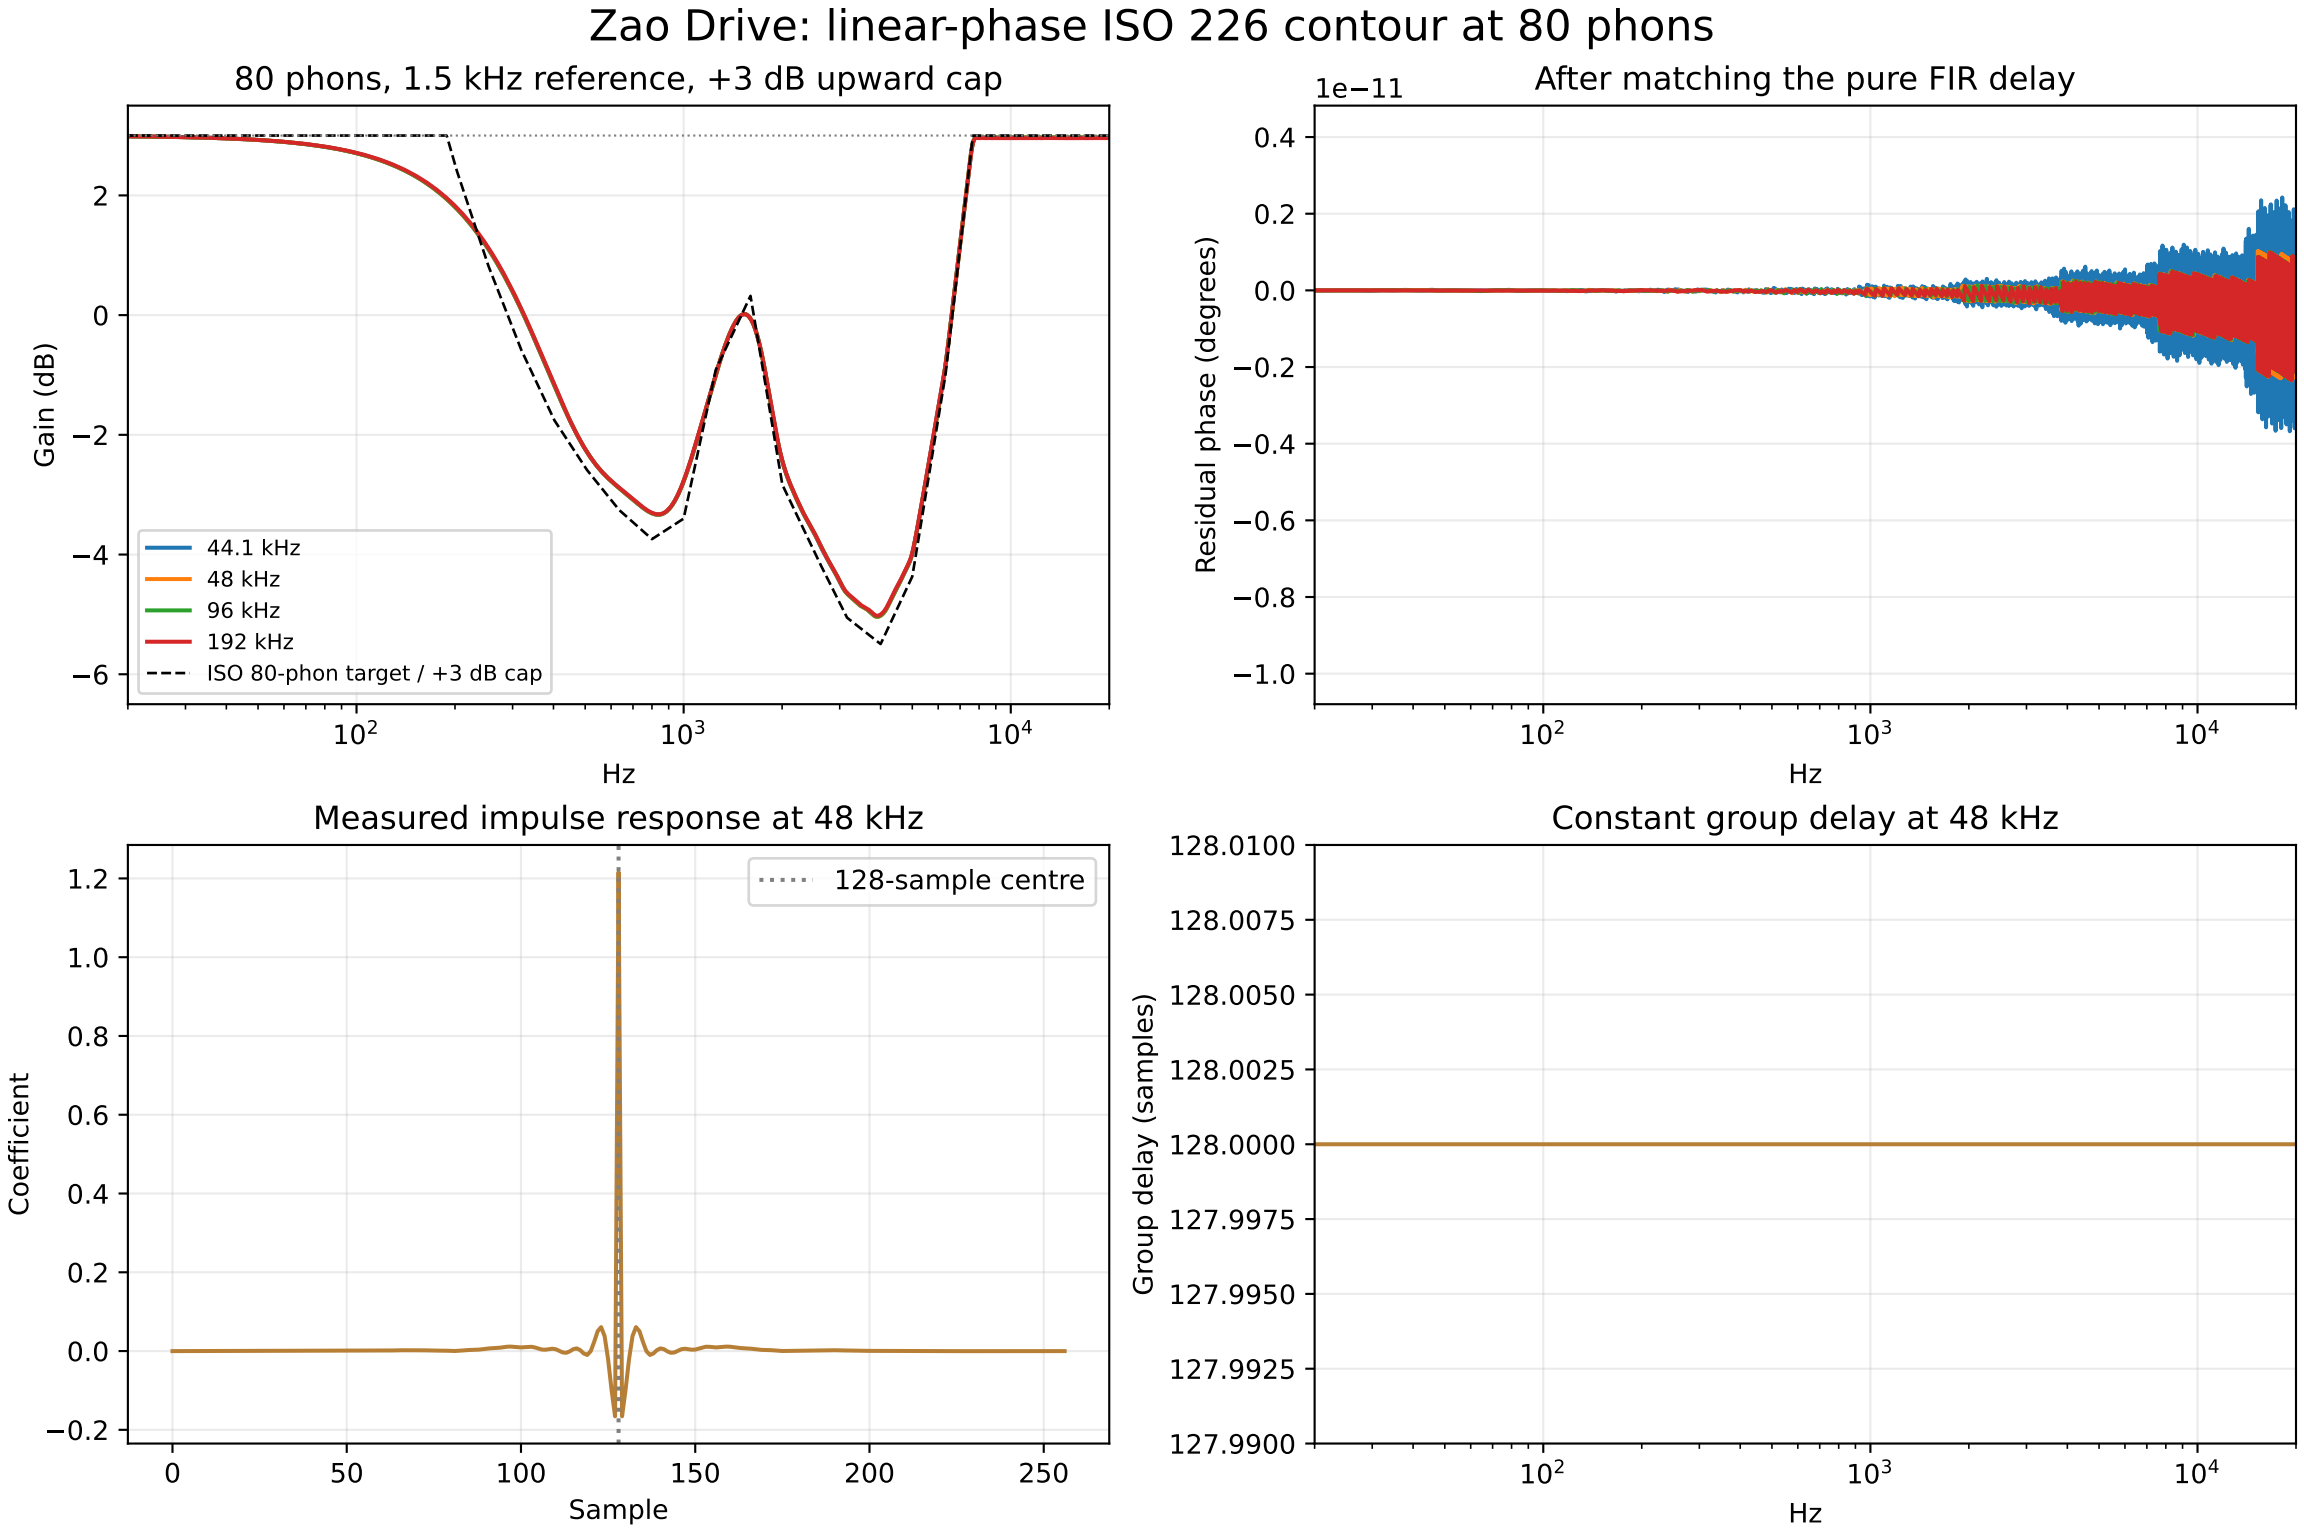

Zao Drive: linear-phase ISO 226 contour at 80 phons
80 phons, 1.5 kHz reference, +3 dB upward cap
Gain (dB)
Hz
44.1 kHz
48 kHz
96 kHz
192 kHz
ISO 80-phon target / +3 dB cap
After matching the pure FIR delay
1e−11
Residual phase (degrees)
Hz
Measured impulse response at 48 kHz
128-sample centre
Coefficient
Sample
Constant group delay at 48 kHz
Group delay (samples)
Hz