
SHUN DE-ESS | WIDEBAND & SPLIT-BAND SIBILANCE PULSES

Same seeded high-pass noise bursts · measured output − input by frequency and time

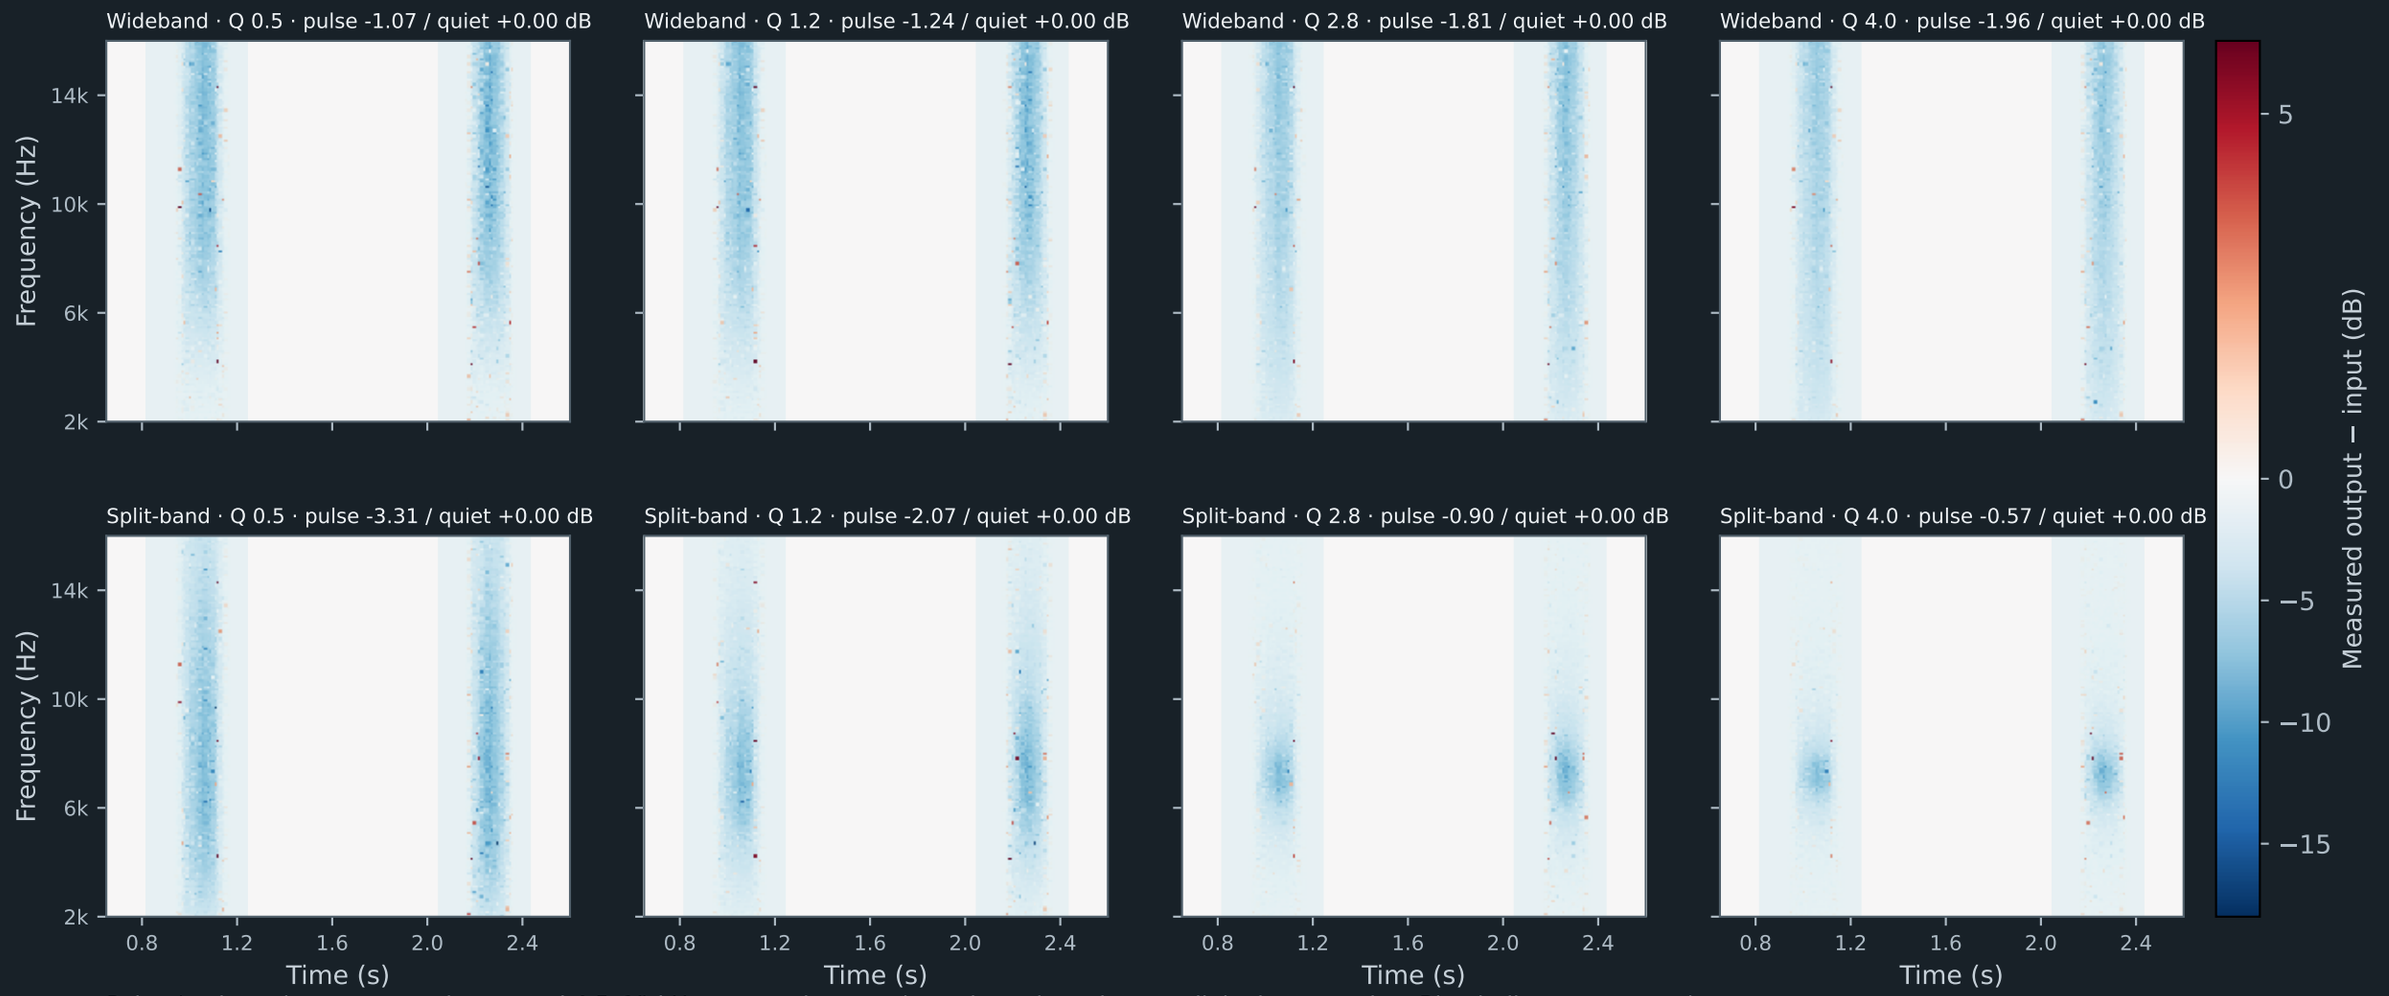

Pulse / quiet values compare integrated 4.5–12 kHz energy; lower pulse values show detector-linked attenuation. Blue indicates attenuation.