
SHUN DE-ESS | TIME-VARYING SIBILANCE PULSES

Same seeded input across Wideband, Split-band, and Smart · quiet baseline releases to unity

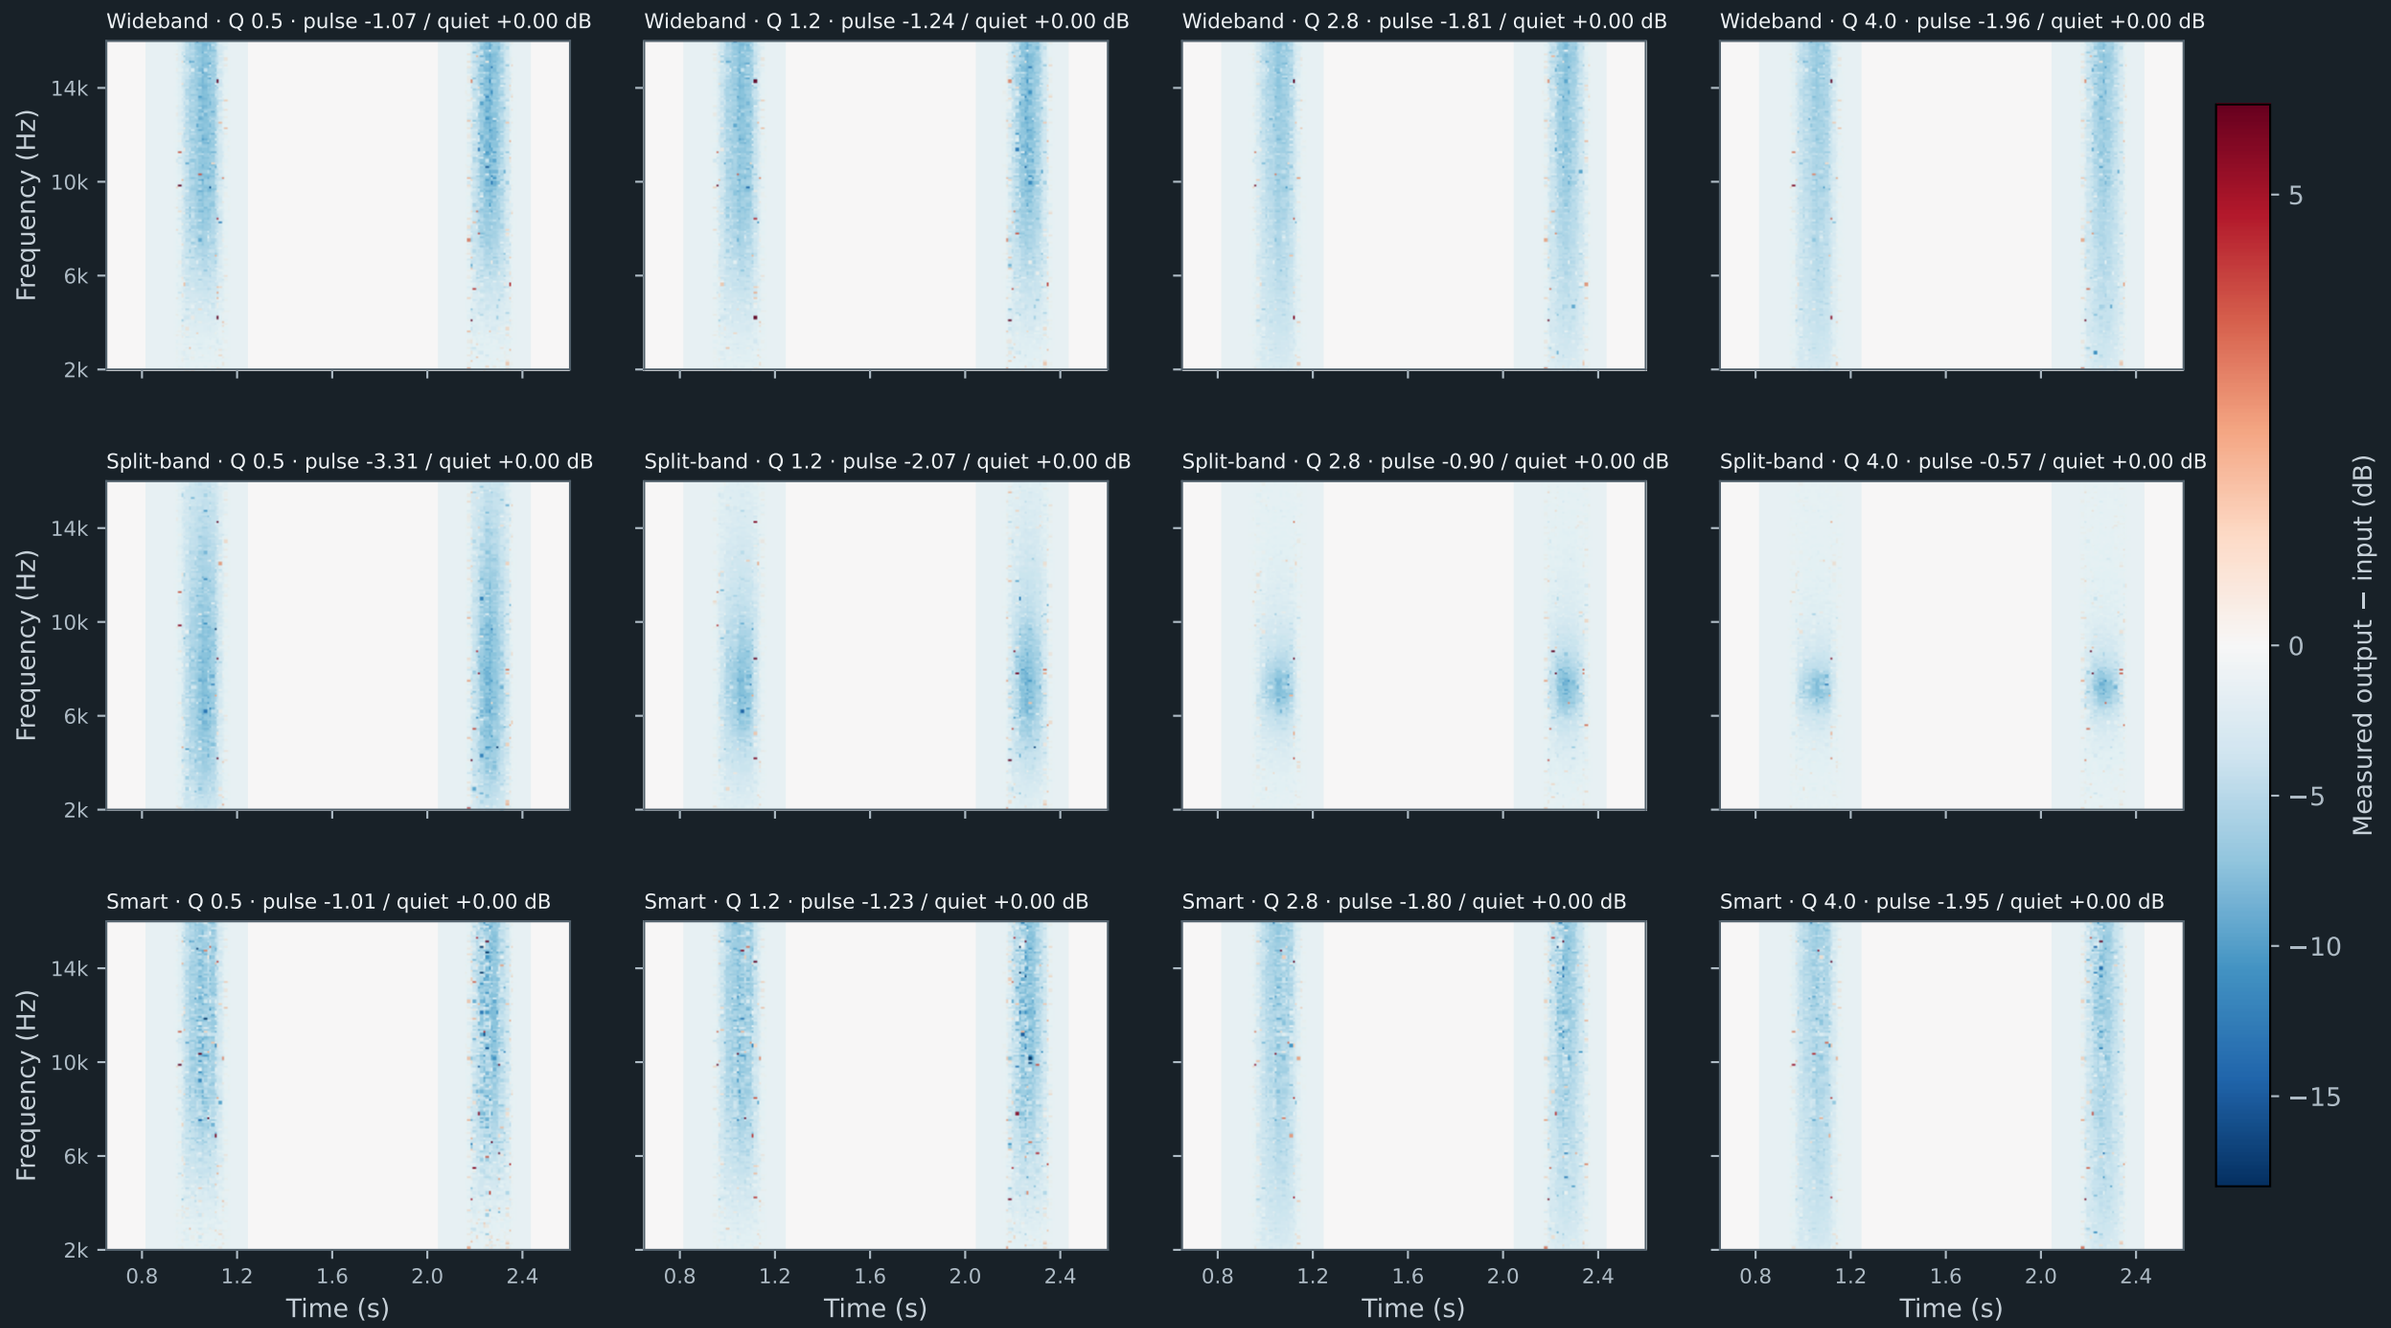

Panel titles show integrated pulse / quiet 4.5–12 kHz change; each pulse should be lower than its quiet baseline. Blue indicates attenuation.