
SHUN DE-ESS | WIDEBAND & SPLIT-BAND SIBILANCE PULSES

Same seeded high-pass noise bursts · measured output − input by frequency and time

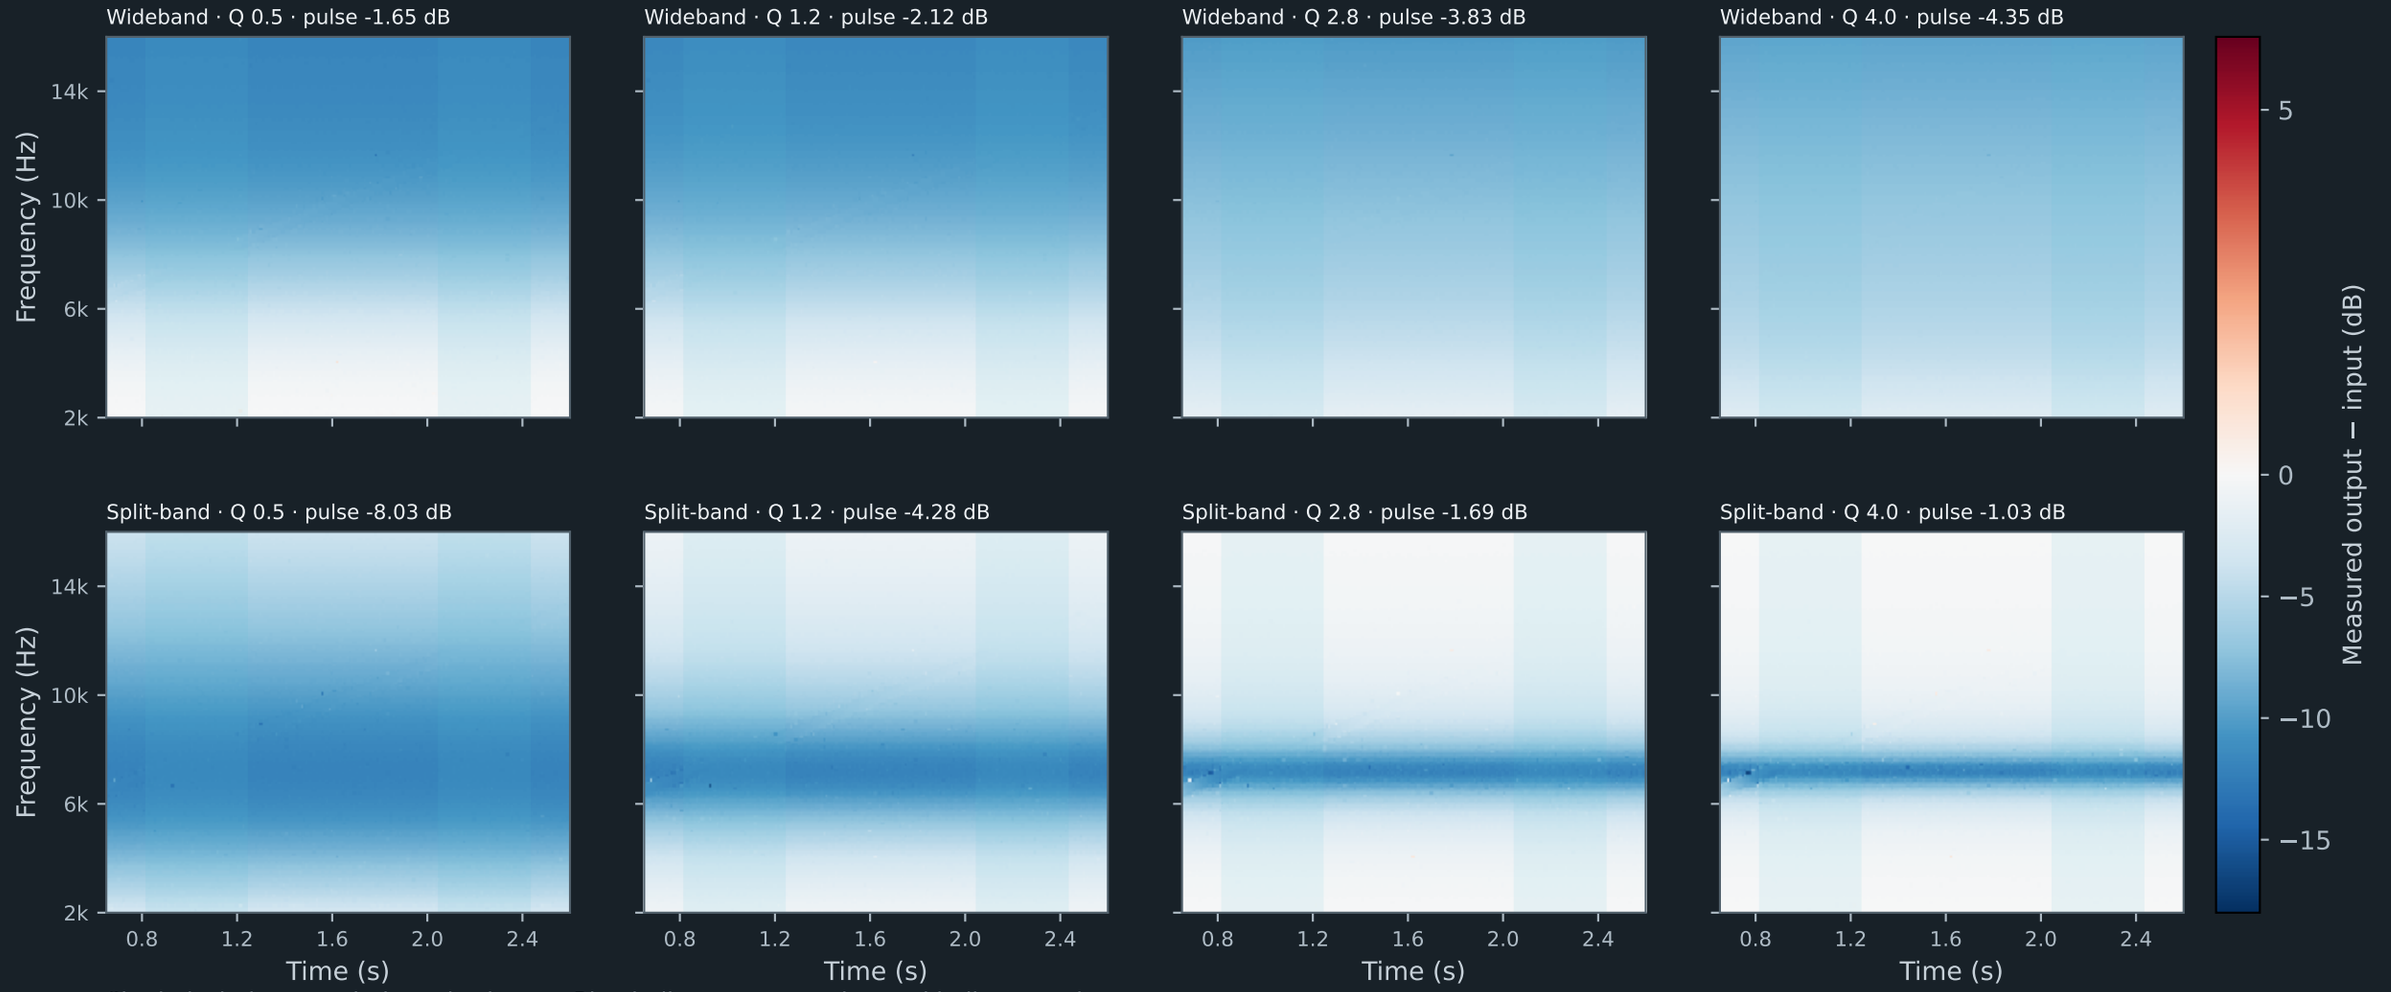

Shaded windows mark the noise bursts. Blue indicates attenuation; red indicates gain.