Transformer distortion / high-tilt verification

Production C++ DSP • 48 kHz • 2× transformer • compression 1:1 • fixed 64-sample delay removed

500 Hz / 12 dB per octave filtering applies to generated distortion; the clean high-frequency signal remains.

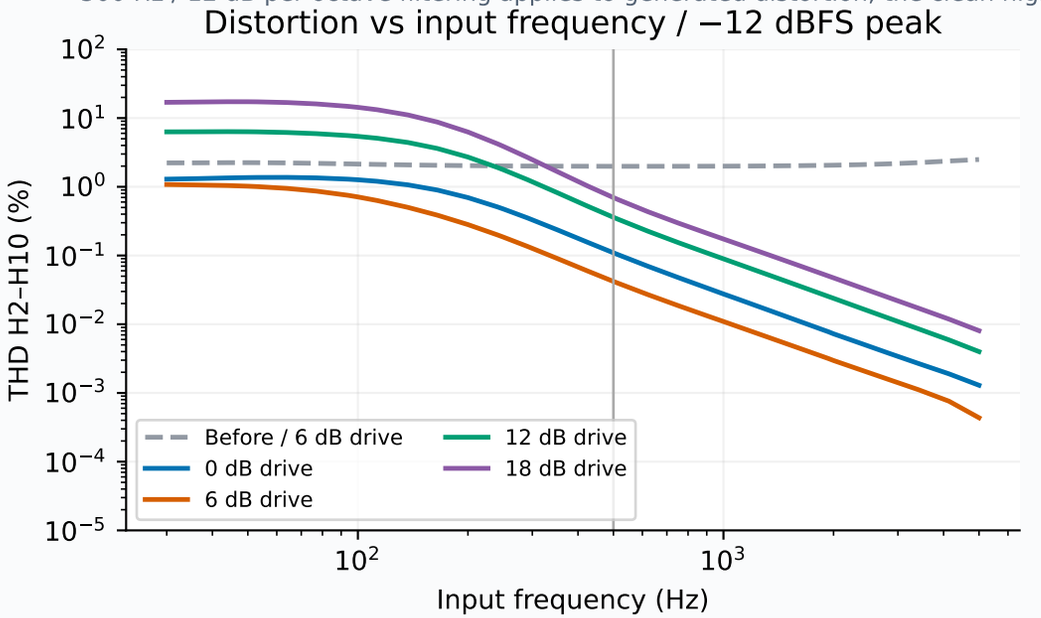

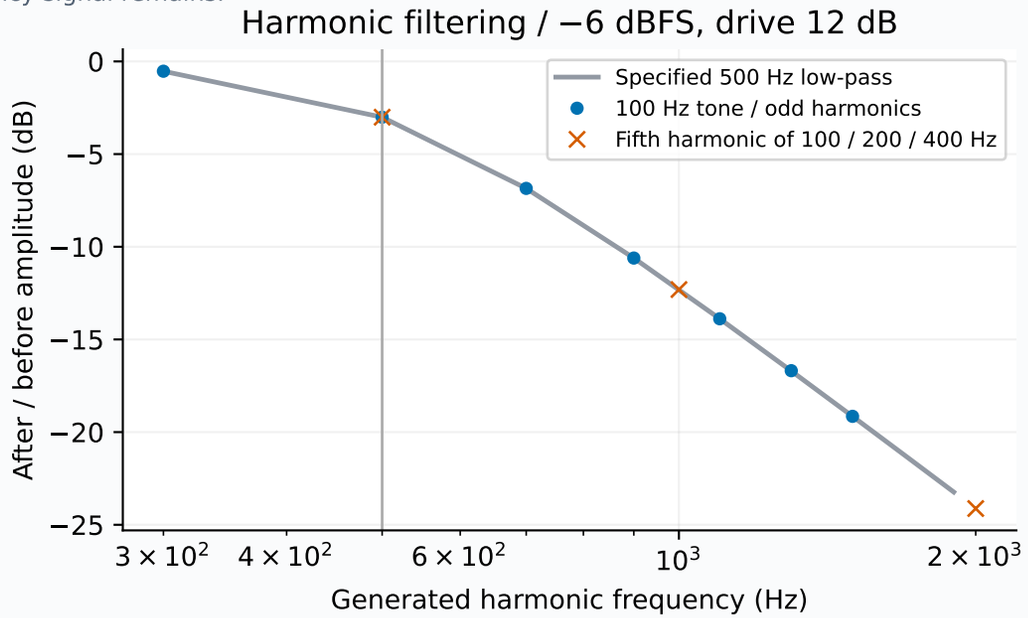

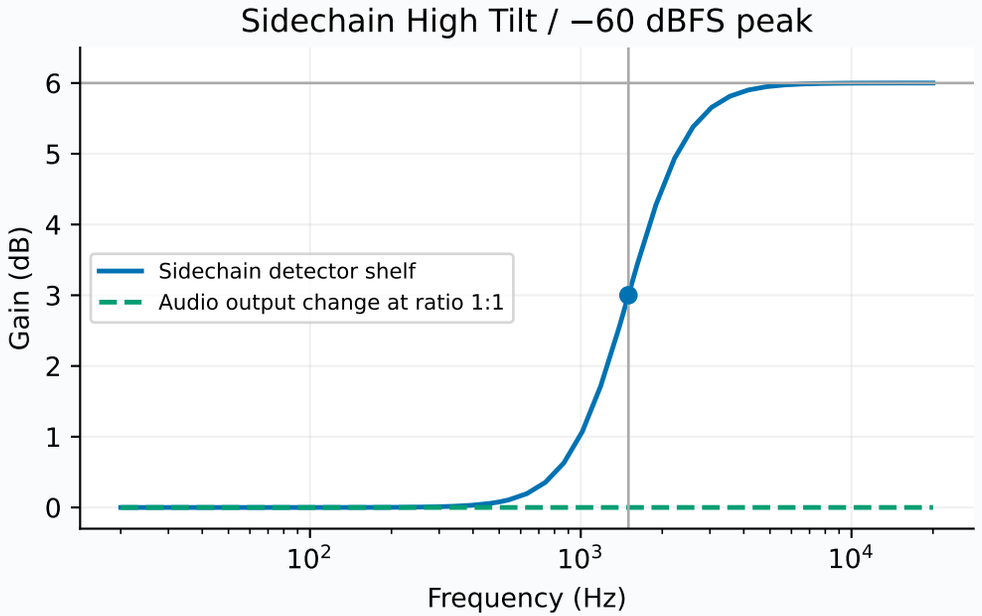

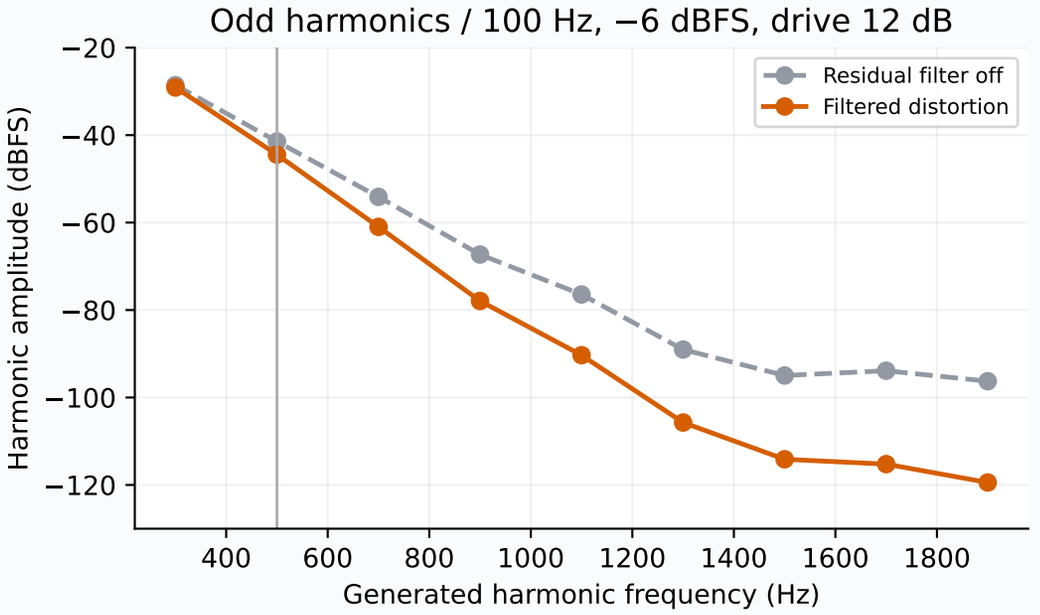

Sidechain shelf: 1.5 kHz midpoint (+3 dB), +6 dB plateau. No direct output EQ. Tilt off in distortion measurements.

Roll-off is gradual, not a brick-wall cutoff. Very low THD values include floating-point and residual alias limits.