

01 / Compression curves

Measured C++ DSP • 48 kHz • threshold −18 dBFS • ratio 4:1 • knee 6 dB • attack 10 ms / release 150 ms

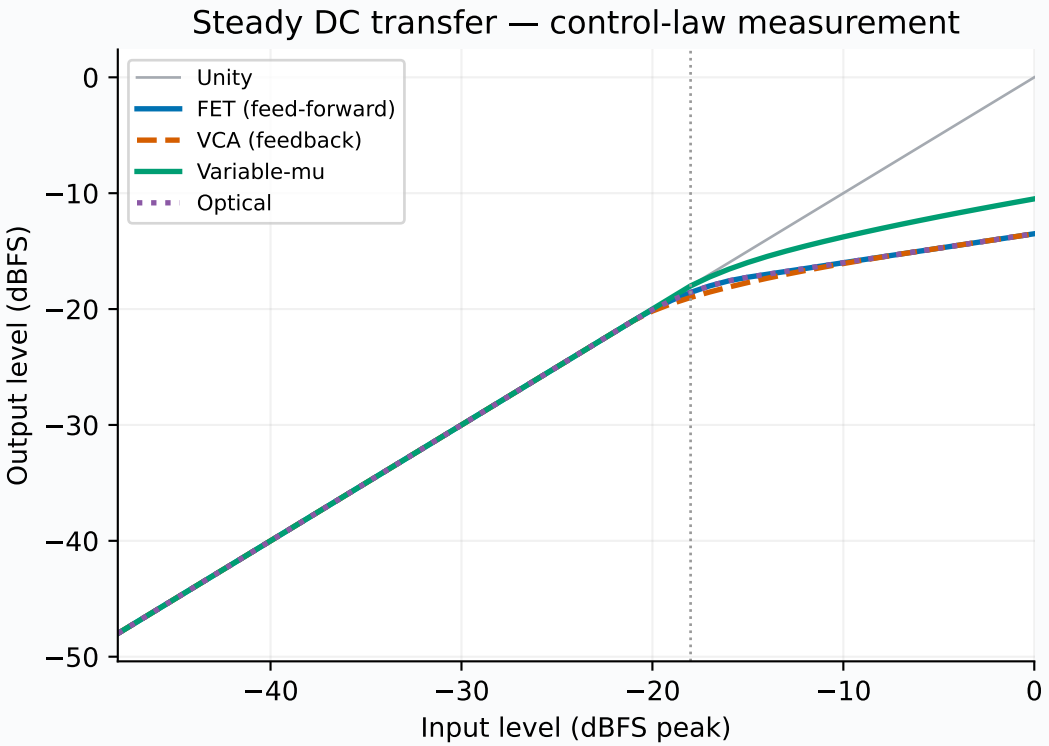


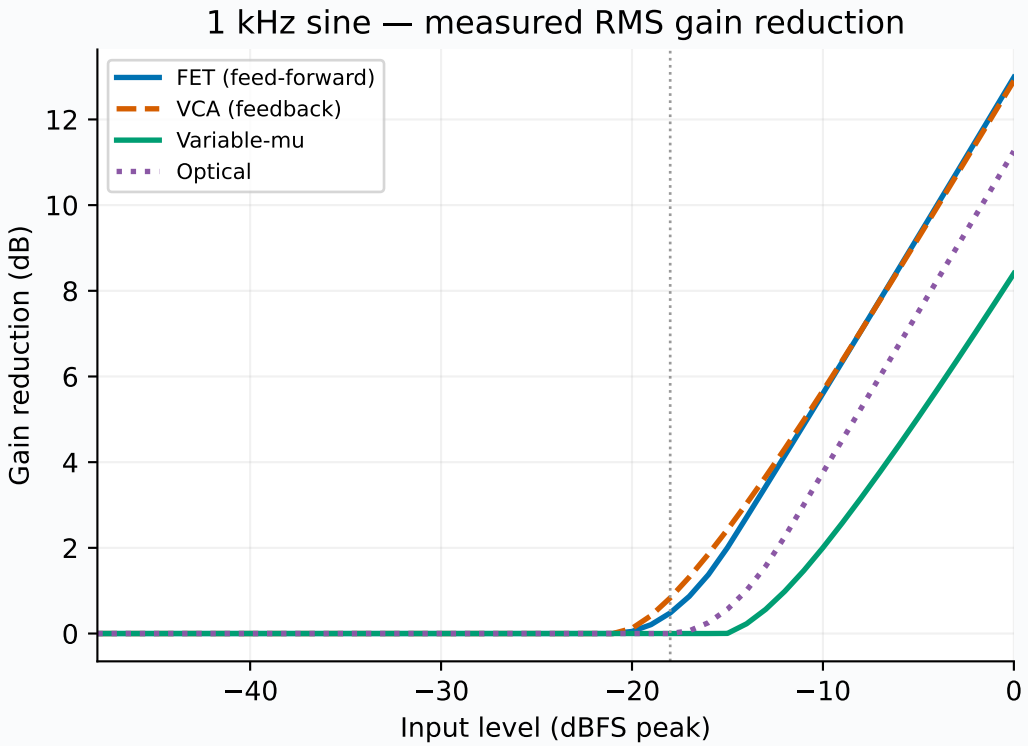



Detector HPF and transformer off. Each point: 2 s settling run; final 250 ms measured. FET / optical DC curves overlap.

02 / Attack and recovery

Measured C++ DSP • 48 kHz • threshold −18 dBFS • ratio 4:1 • knee 6 dB • attack 10 ms / release 150 ms

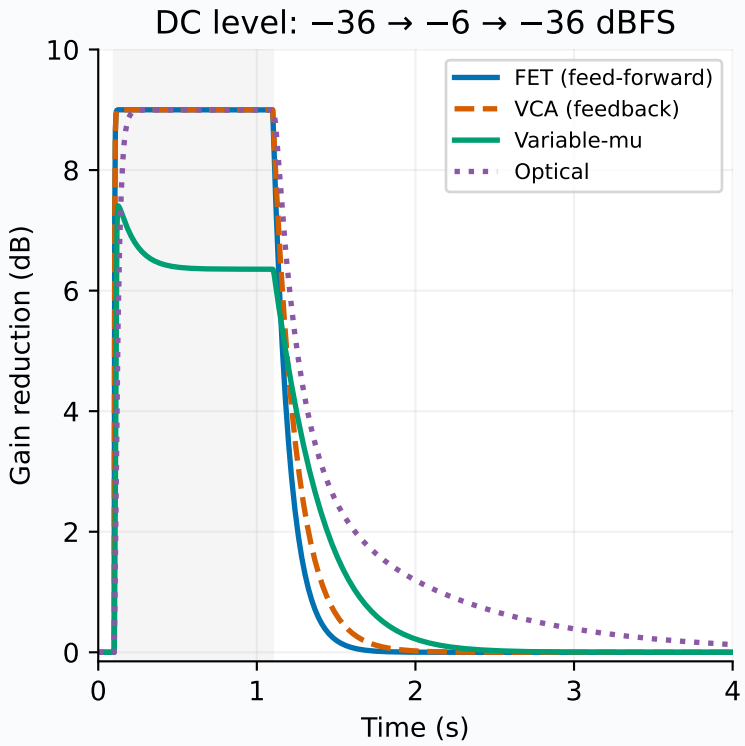

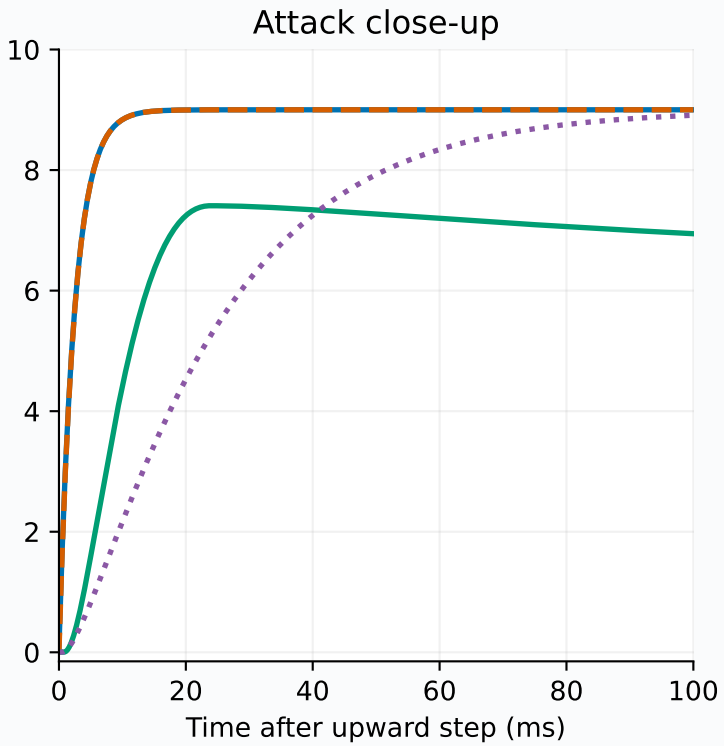


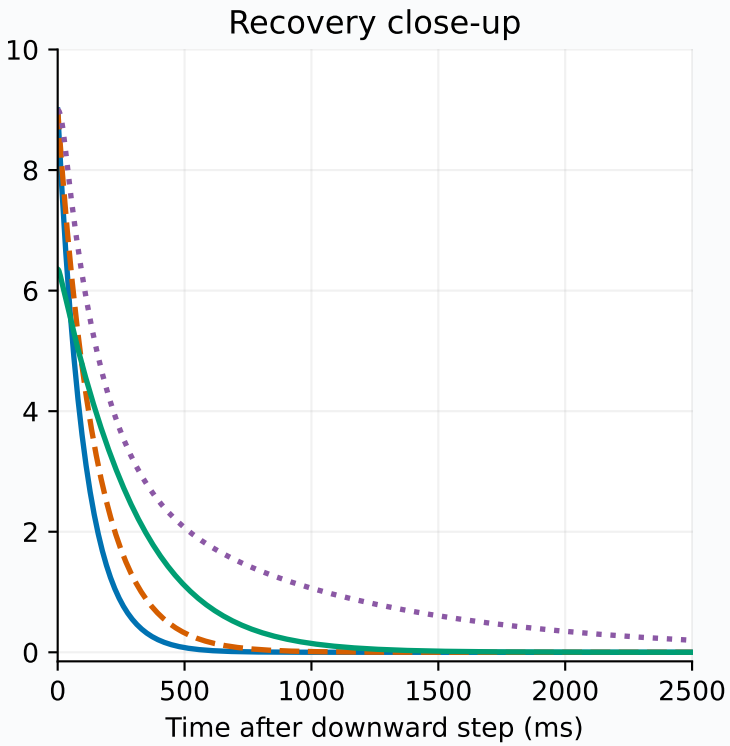



DC isolates envelope dynamics; detector HPF and transformer off. Knob values are not measured settling times.


03 / Output transformer character

Measured C++ DSP • 48 kHz • 2× transformer • compression disabled (1:1) • 0 dB input/output gain

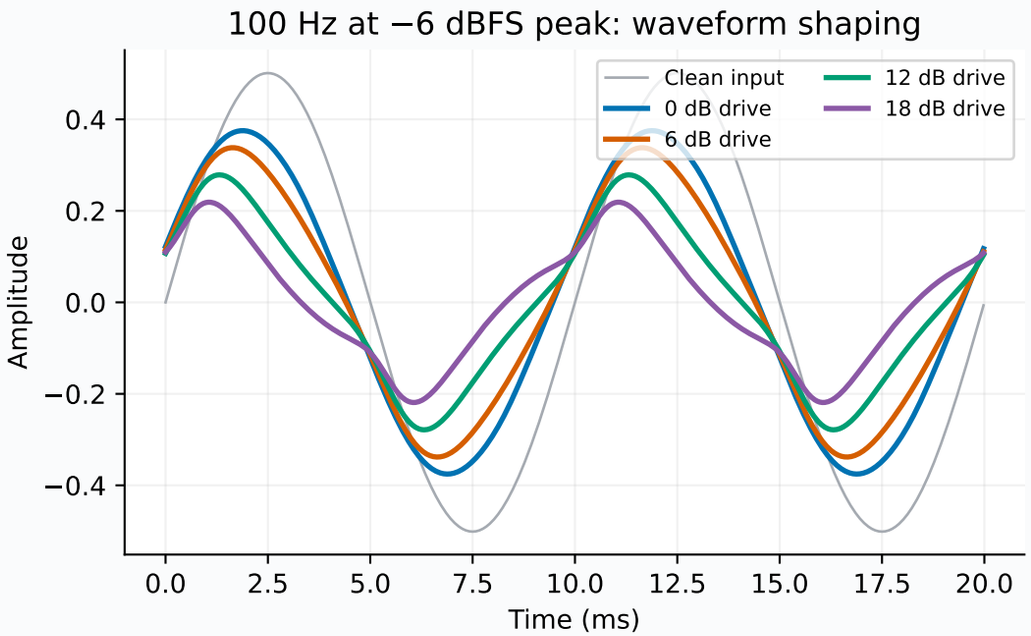

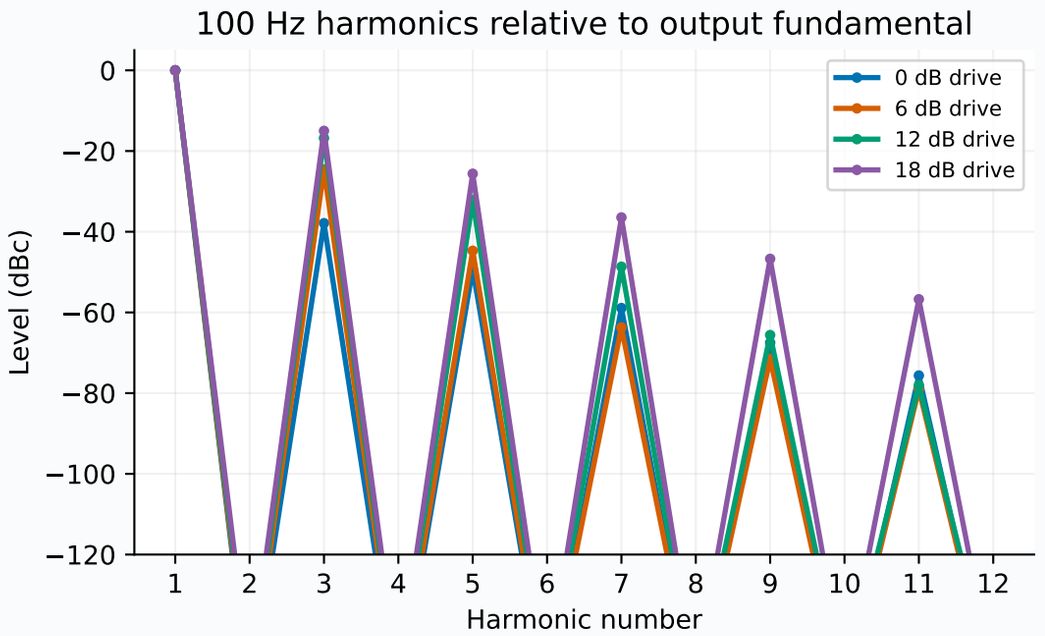

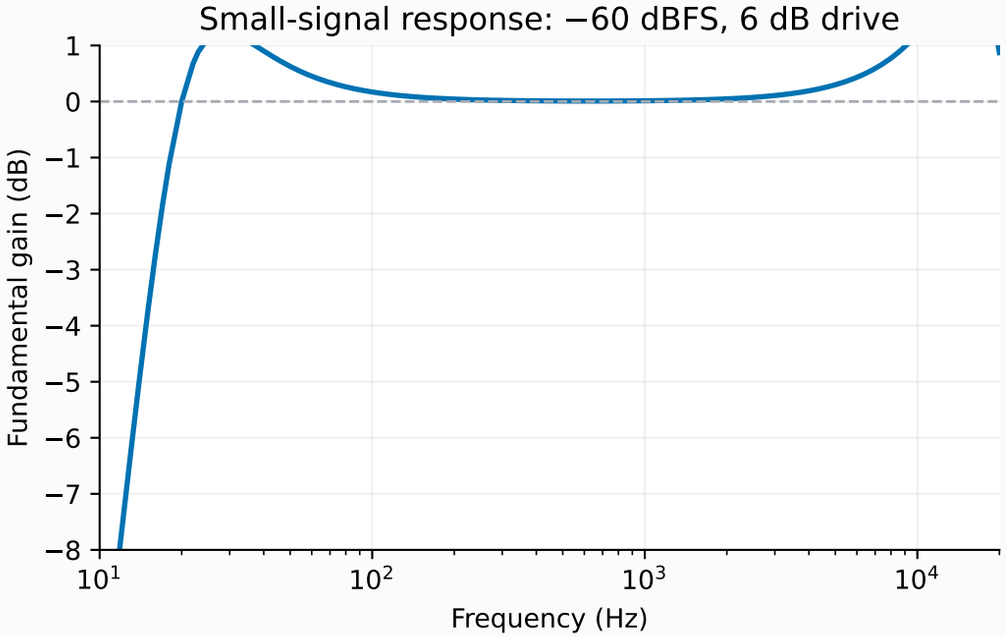

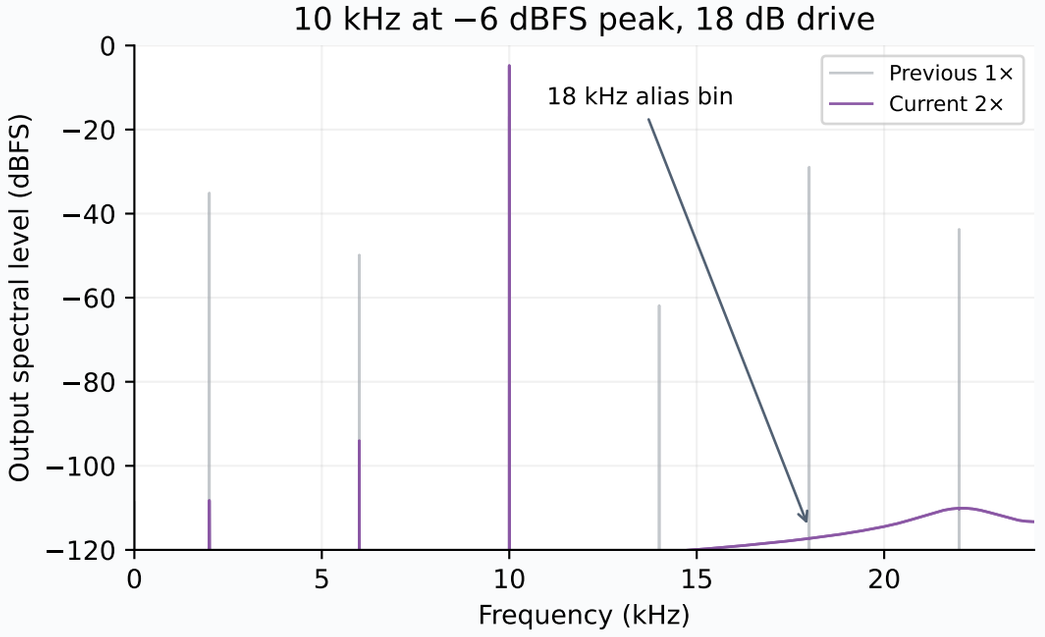

Spectra: final 1 s of coherent 2 s tones. 2× oversampling reduces aliasing; residual products remain possible. Fixed delay removed.