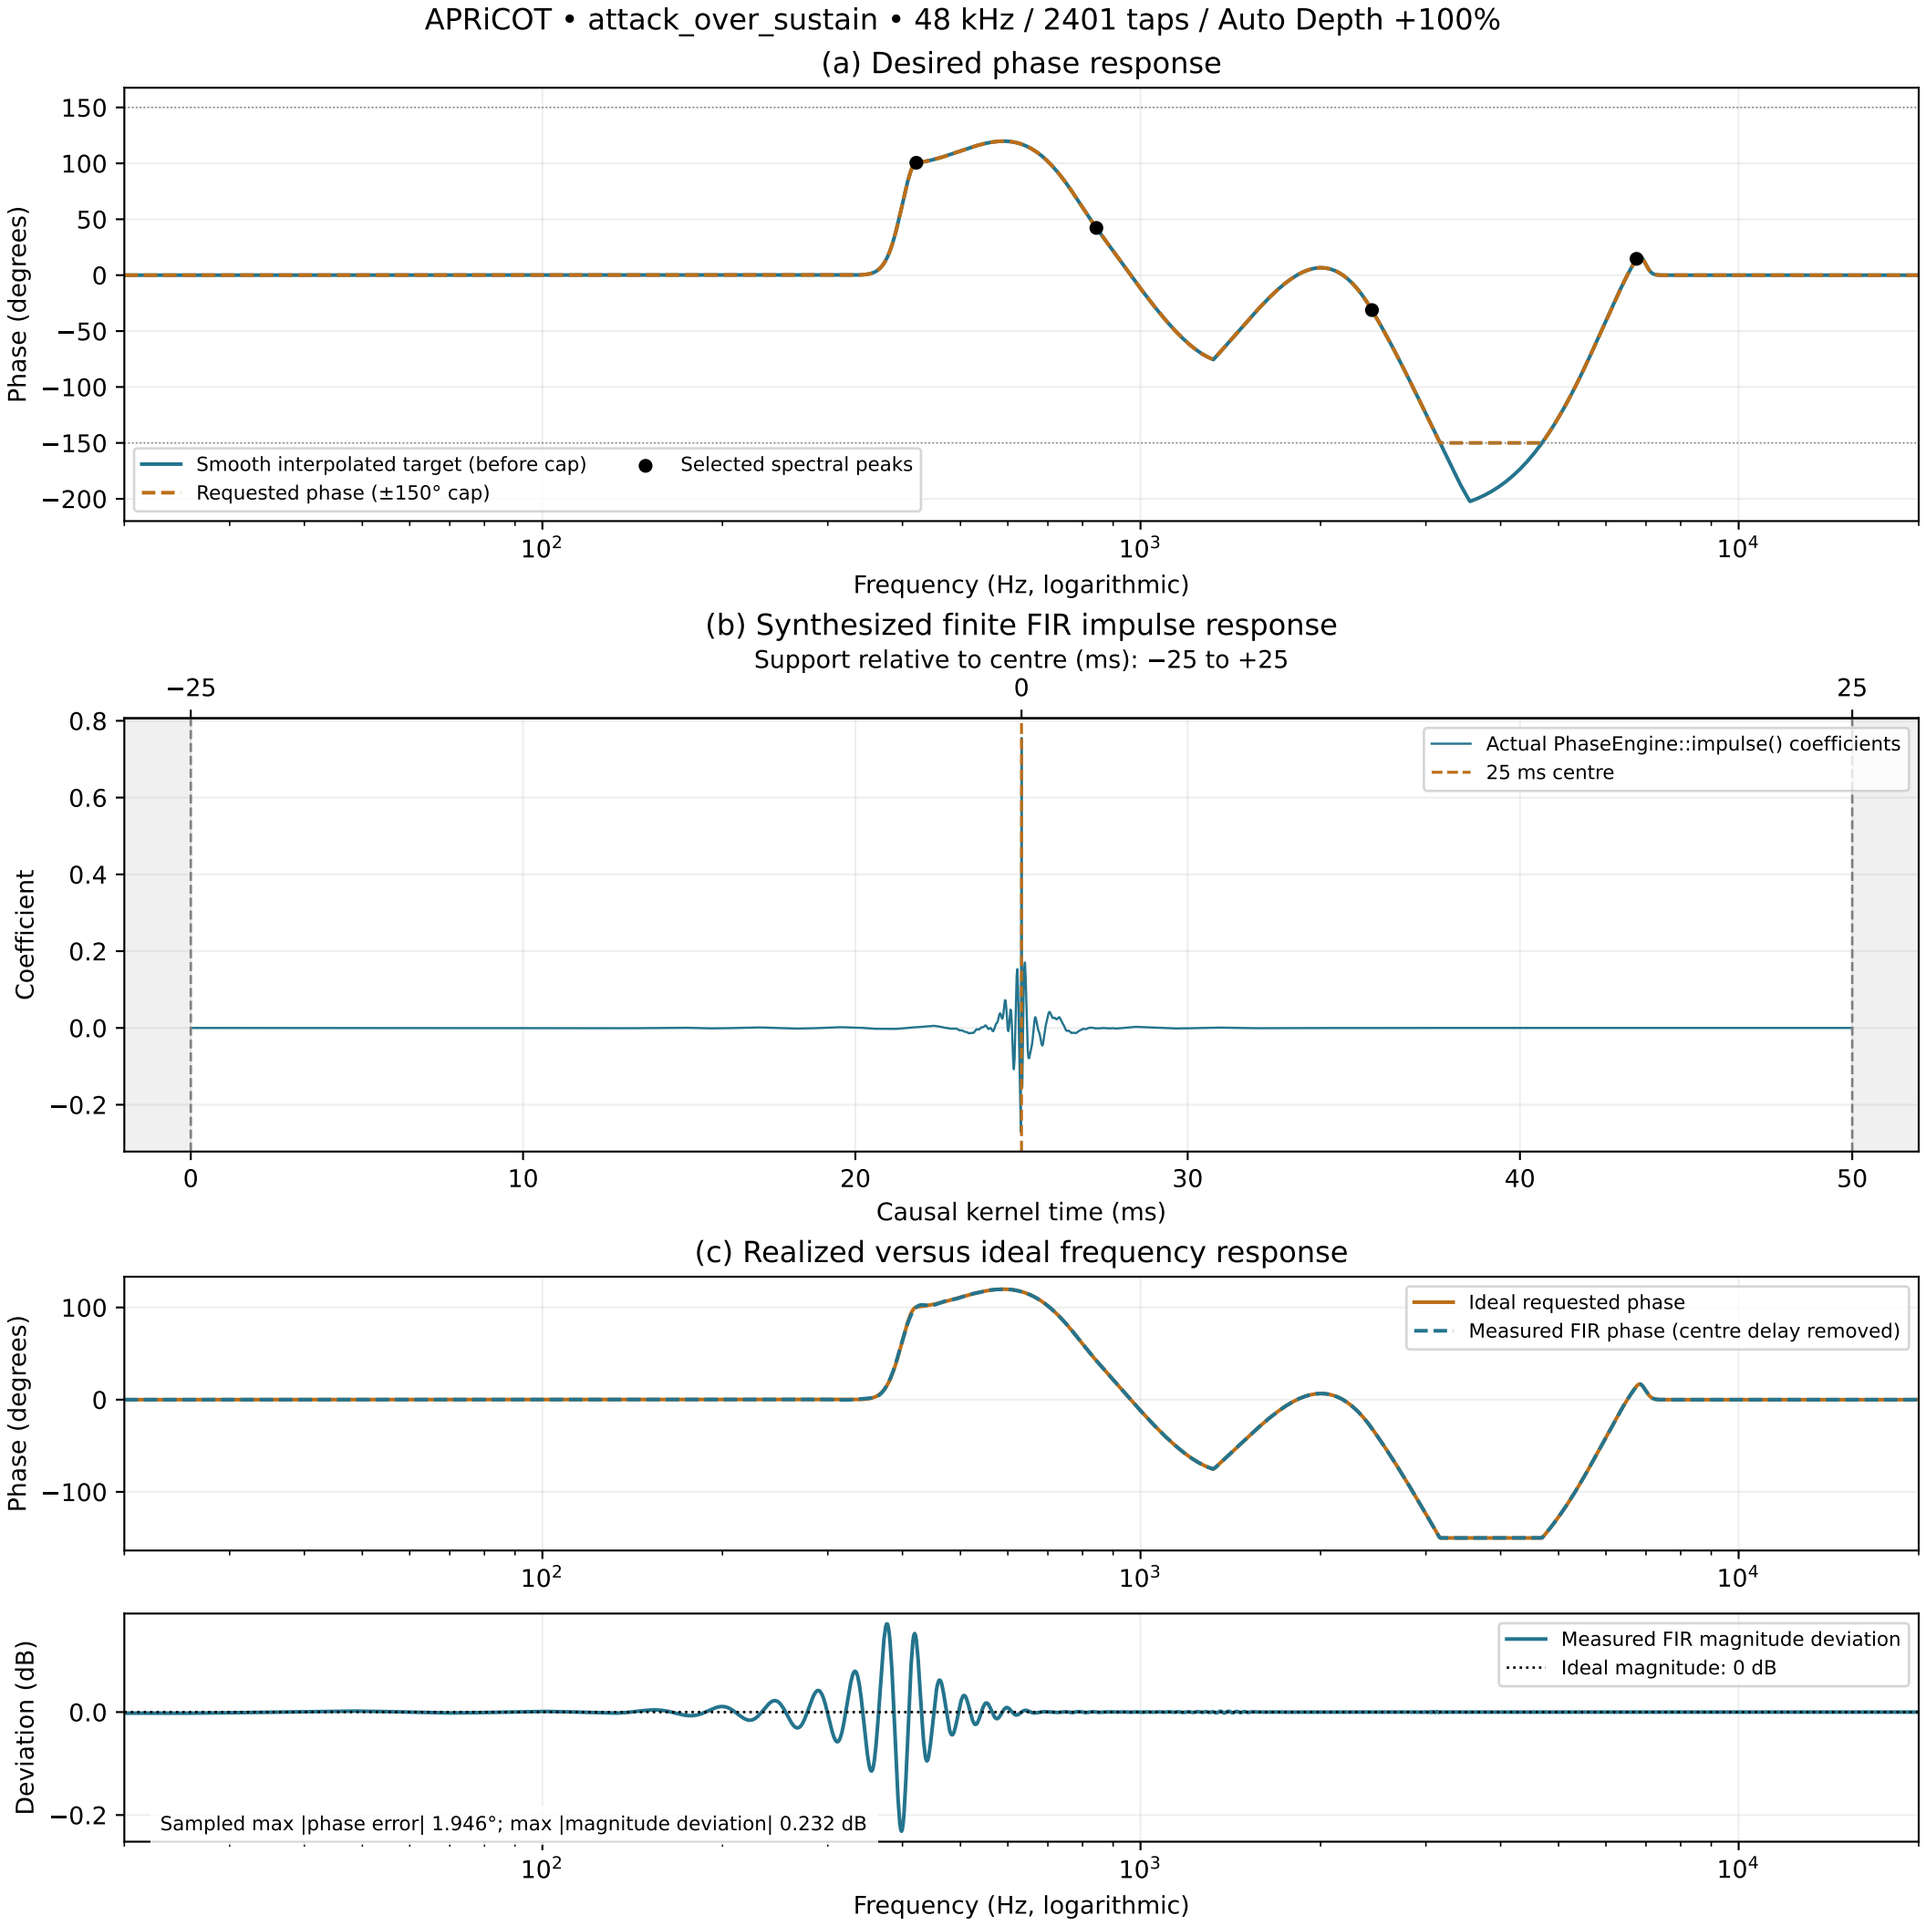
APRiCOT • attack_over_sustain • 48 kHz / 2401 taps / Auto Depth +100%
(a) Desired phase response
Phase (degrees)
Smooth interpolated target (before cap)
Requested phase (±150° cap)
Selected spectral peaks
Frequency (Hz, logarithmic)
(b) Synthesized finite FIR impulse response
Support relative to centre (ms): −25 to +25
Coefficient
Actual PhaseEngine::impulse() coefficients
25 ms centre
Causal kernel time (ms)
(c) Realized versus ideal frequency response
Phase (degrees)
Ideal requested phase
Measured FIR phase (centre delay removed)
Deviation (dB)
Measured FIR magnitude deviation
Ideal magnitude: 0 dB
Sampled max |phase error| 1.946°; max |magnitude deviation| 0.232 dB
Frequency (Hz, logarithmic)