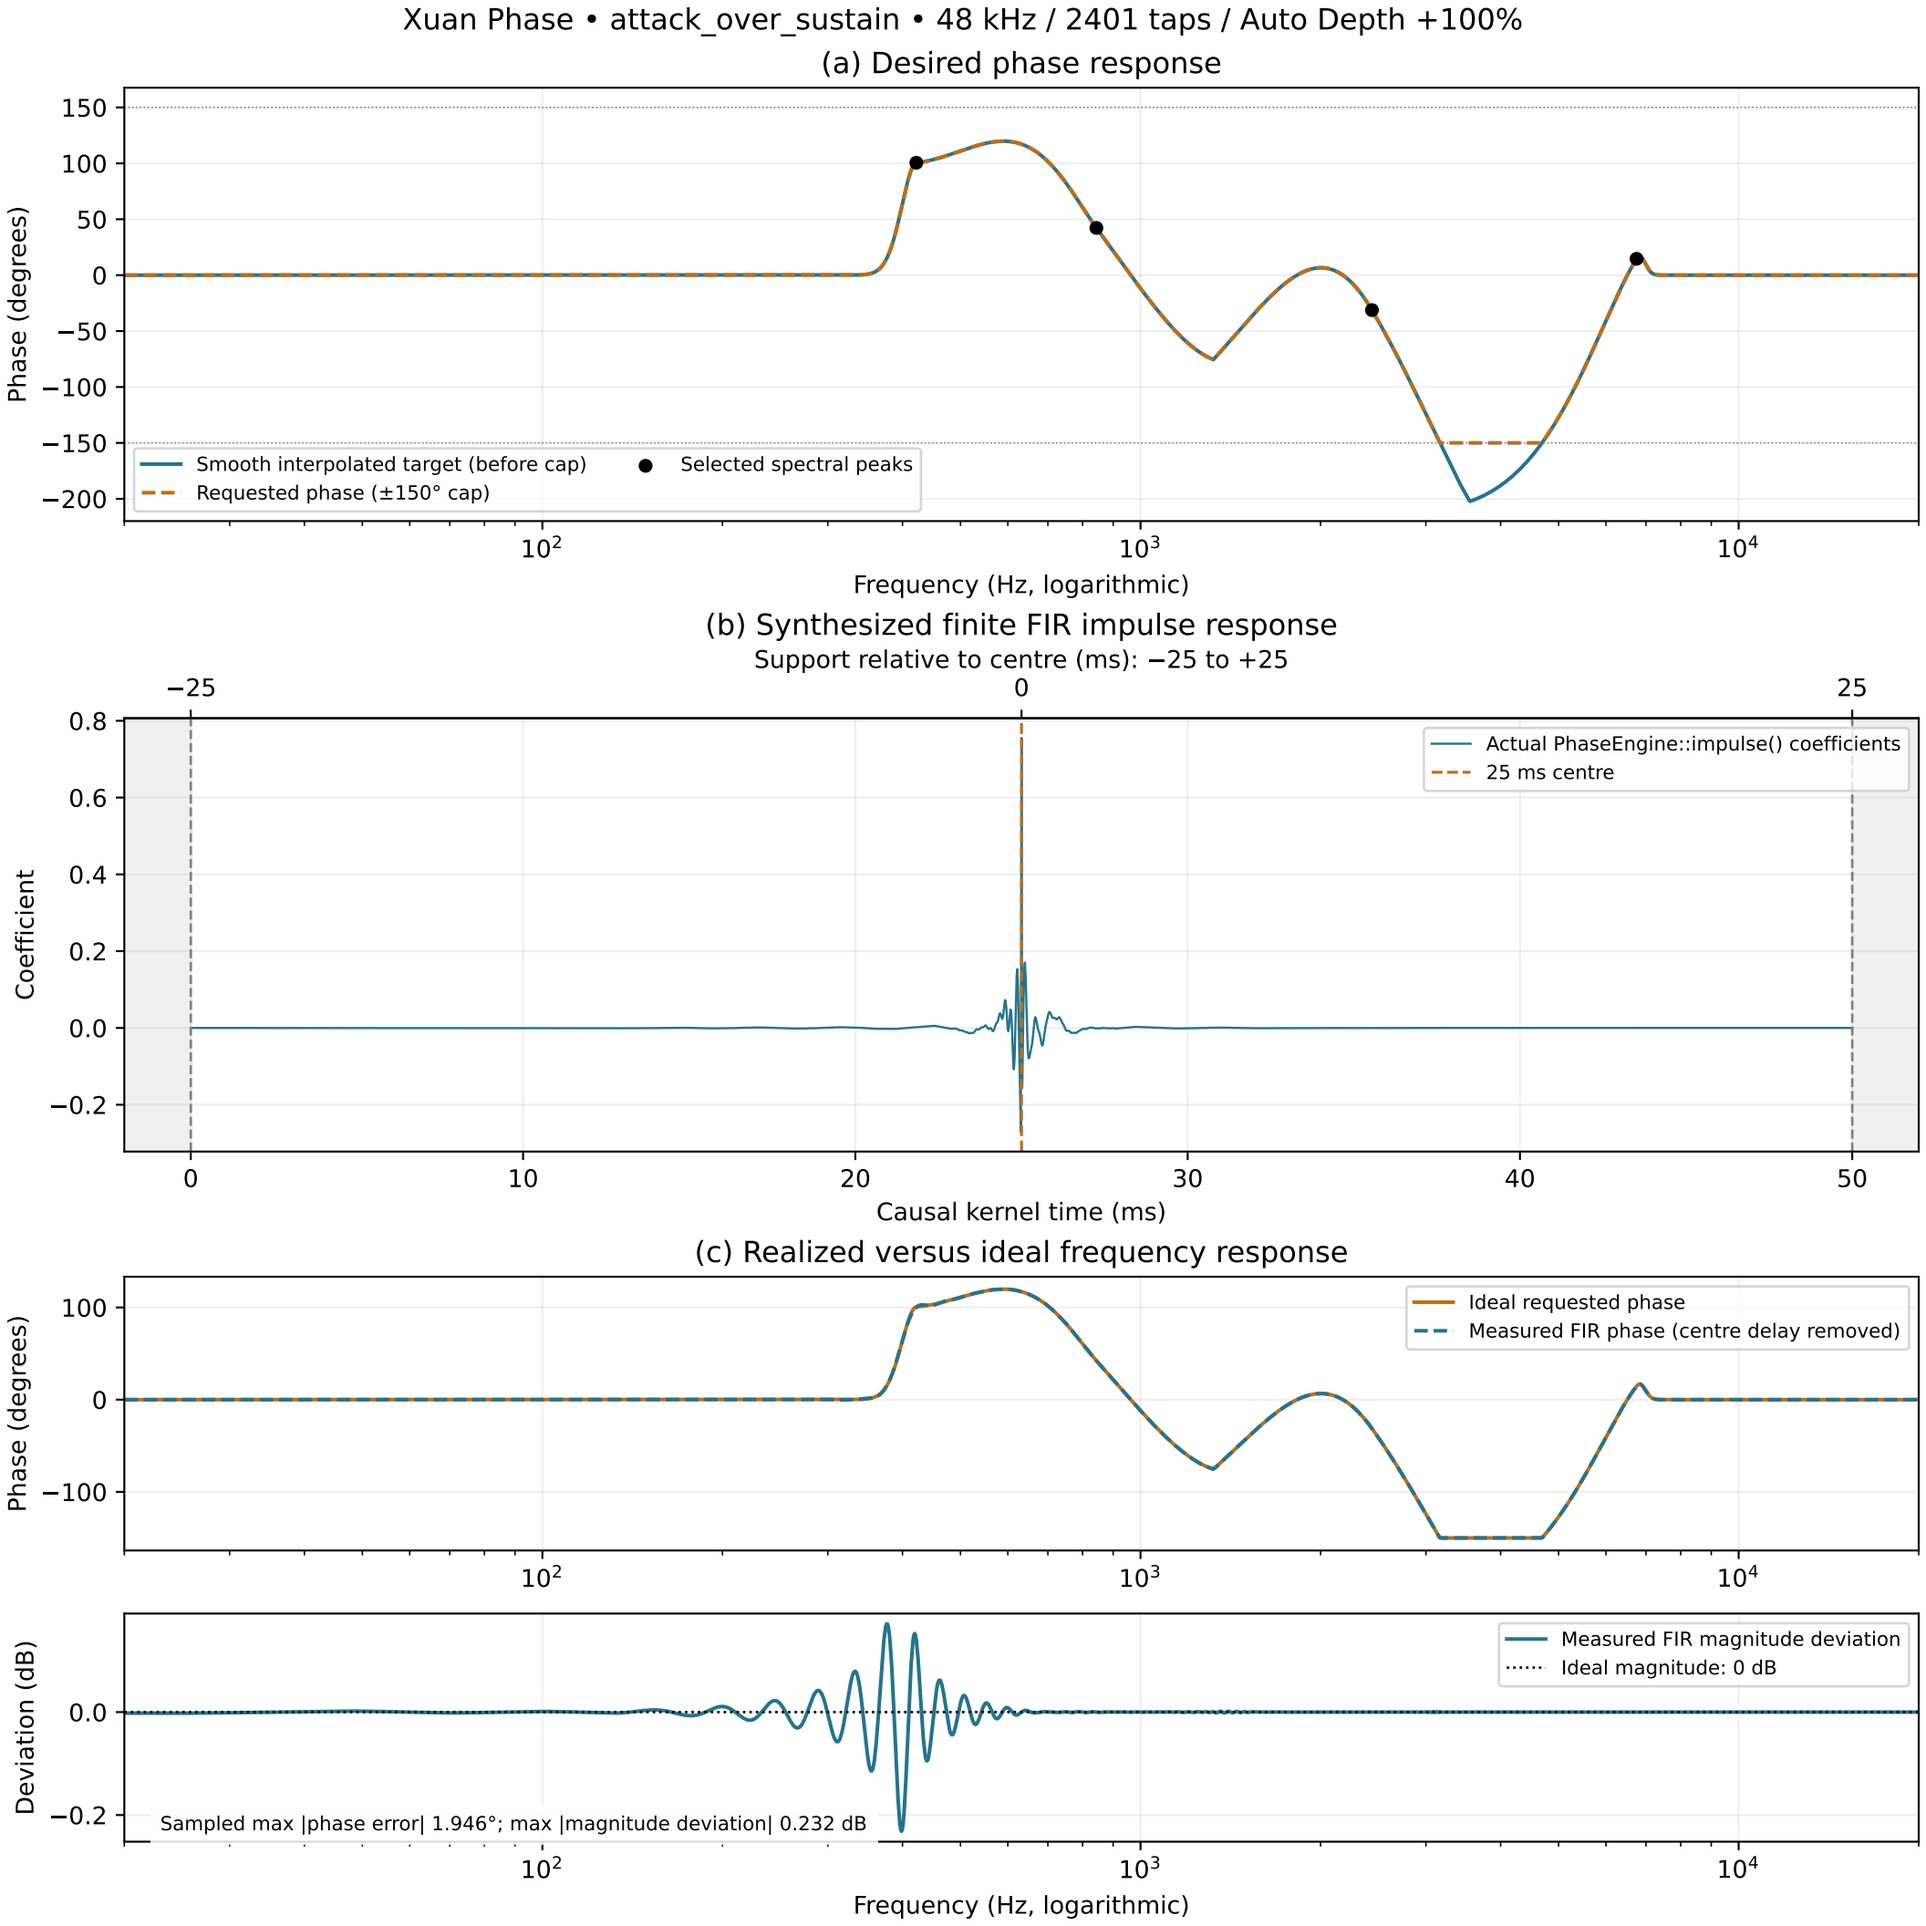
Xuan Phase • attack_over_sustain • 48 kHz / 2401 taps / Auto Depth +100%
(a) Desired phase response
Phase (degrees)
Smooth interpolated target (before cap)
Requested phase (±150° cap)
Selected spectral peaks
Frequency (Hz, logarithmic)
(b) Synthesized finite FIR impulse response
Support relative to centre (ms): −25 to +25
Actual PhaseEngine::impulse() coefficients
25 ms centre
Coefficient
Causal kernel time (ms)
(c) Realized versus ideal frequency response
Ideal requested phase
Measured FIR phase (centre delay removed)
Measured FIR magnitude deviation
Ideal magnitude: 0 dB
Deviation (dB)
Sampled max |phase error| 1.946°; max |magnitude deviation| 0.232 dB
Frequency (Hz, logarithmic)