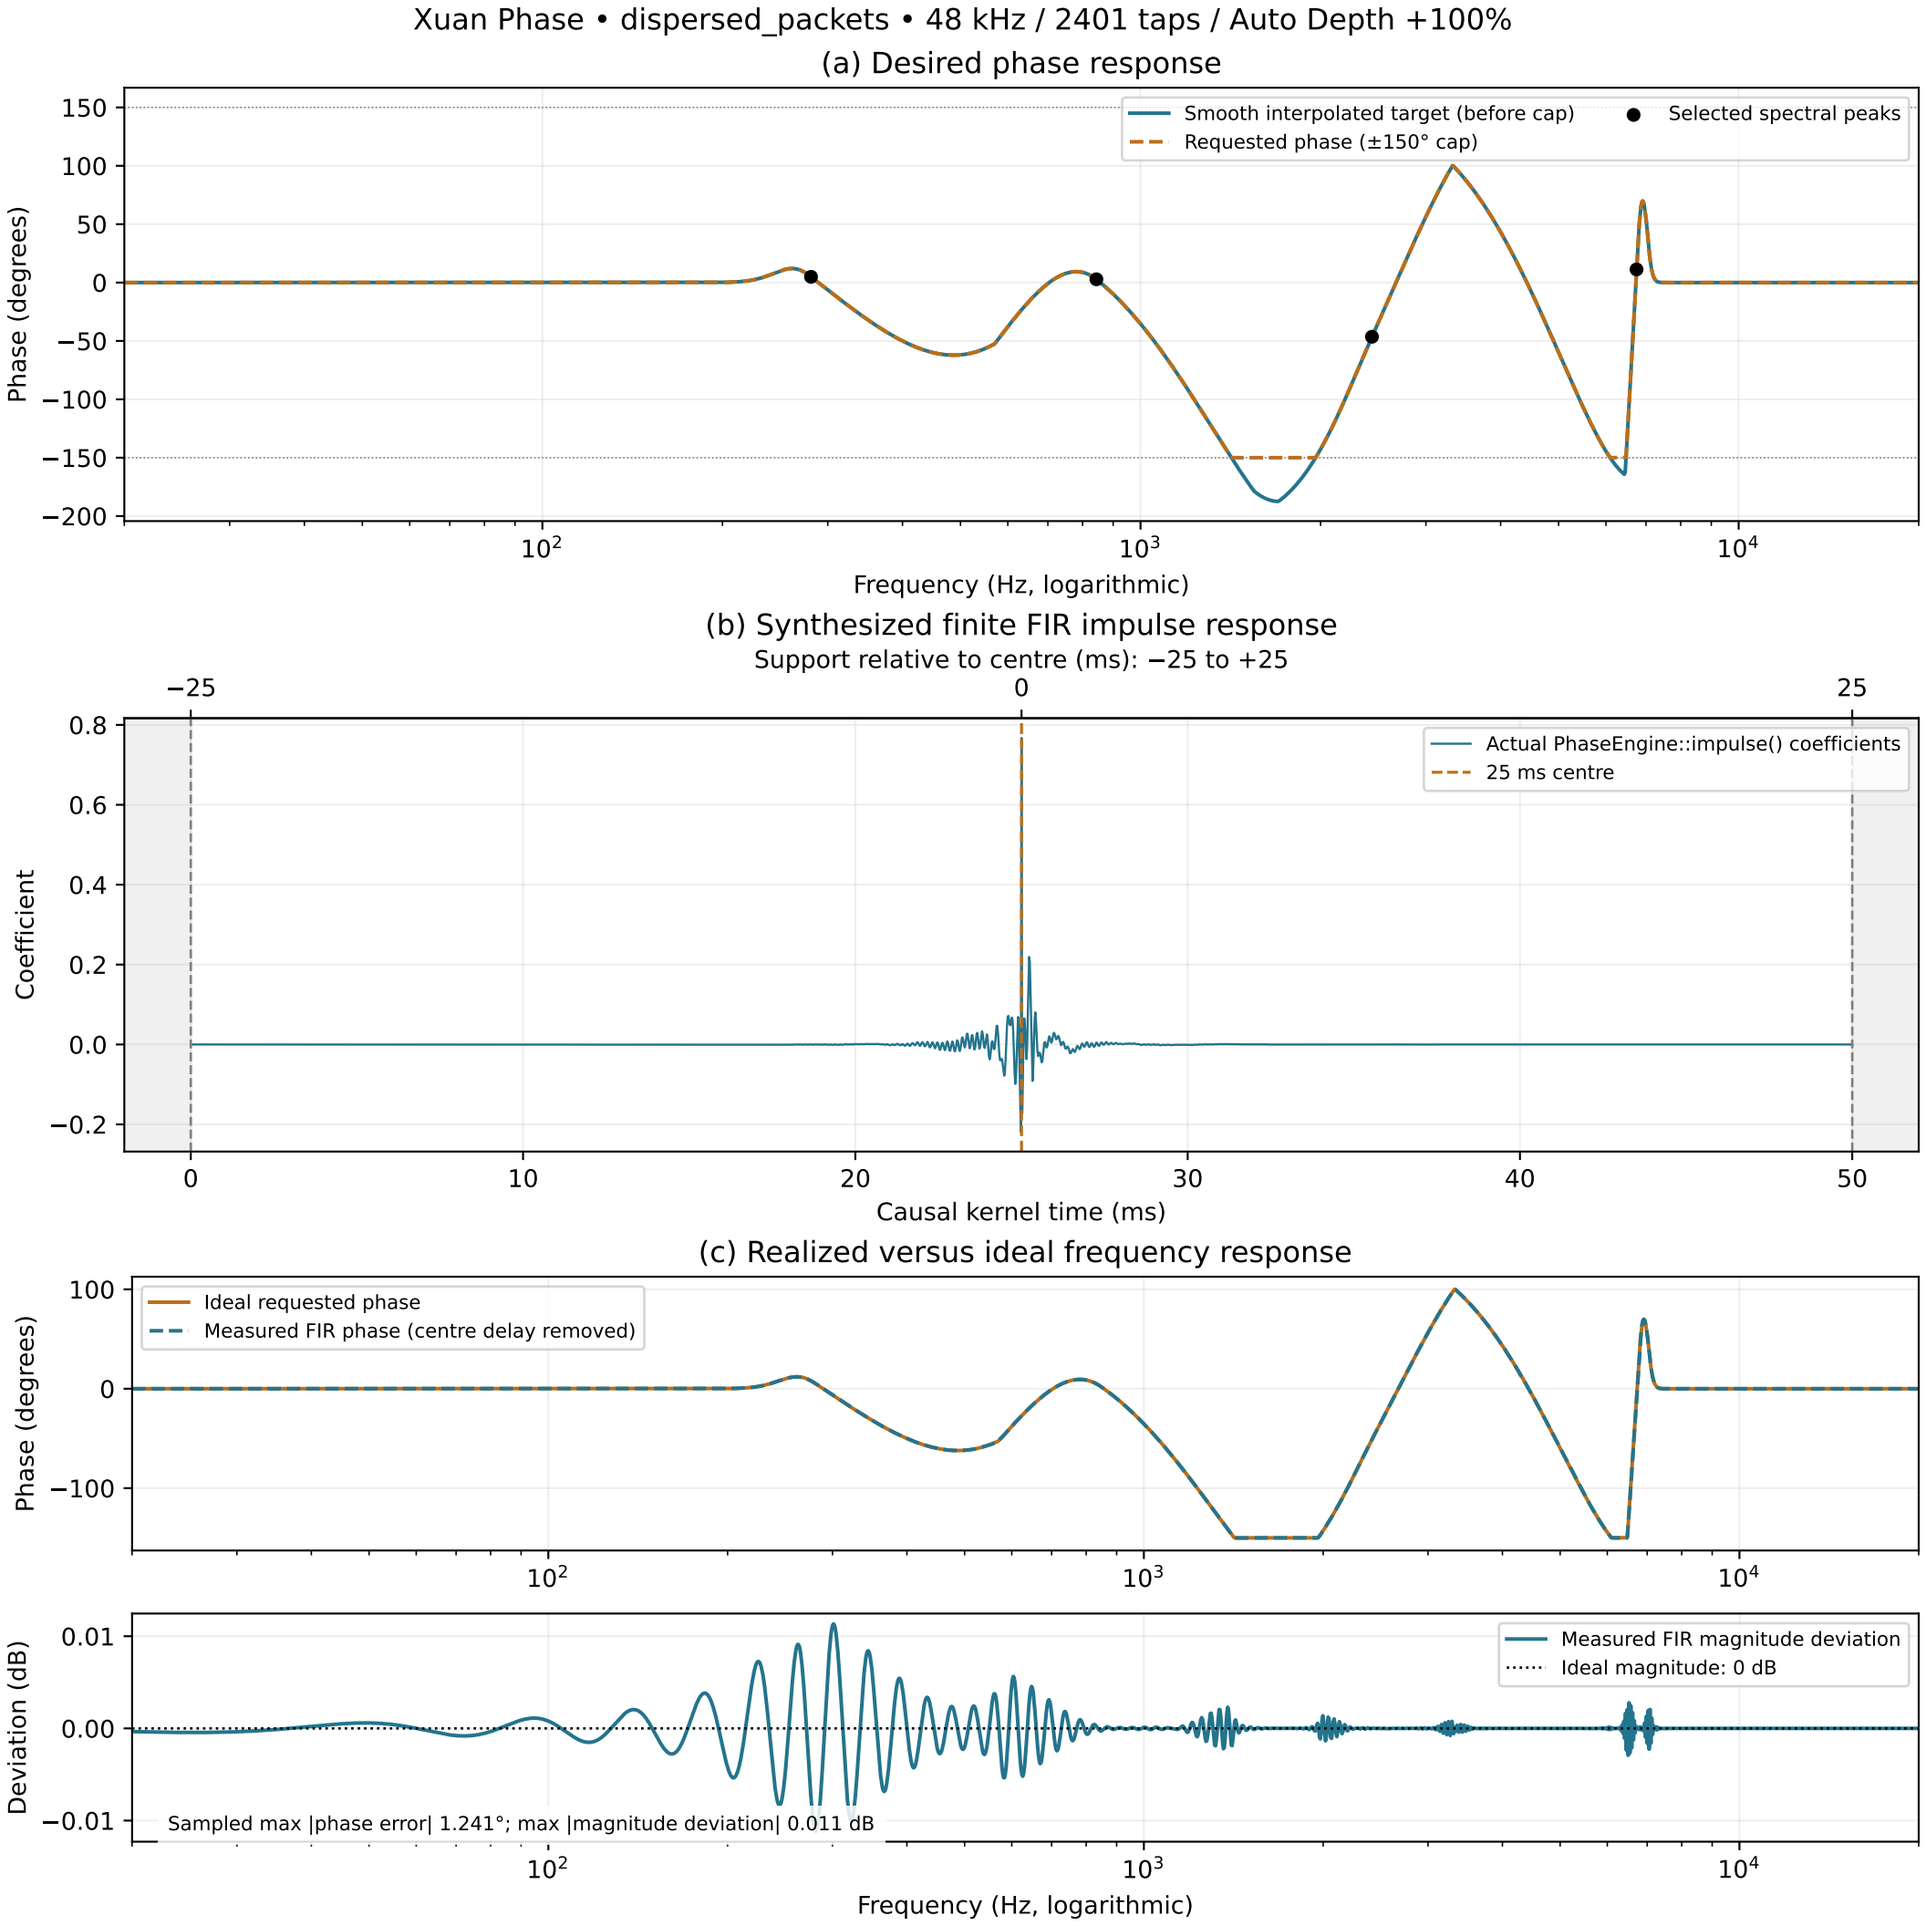
Xuan Phase • dispersed_packets • 48 kHz / 2401 taps / Auto Depth +100%
(a) Desired phase response
Smooth interpolated target (before cap)
Requested phase (±150° cap)
Selected spectral peaks
Phase (degrees)
Frequency (Hz, logarithmic)
(b) Synthesized finite FIR impulse response
Support relative to centre (ms): −25 to +25
Actual PhaseEngine::impulse() coefficients
25 ms centre
Coefficient
Causal kernel time (ms)
(c) Realized versus ideal frequency response
Ideal requested phase
Measured FIR phase (centre delay removed)
Phase (degrees)
Measured FIR magnitude deviation
Ideal magnitude: 0 dB
Deviation (dB)
Sampled max |phase error| 1.241°; max |magnitude deviation| 0.011 dB
Frequency (Hz, logarithmic)