


REV.	ECN NO.	DESCRIPTION	APP.	DATE
A				

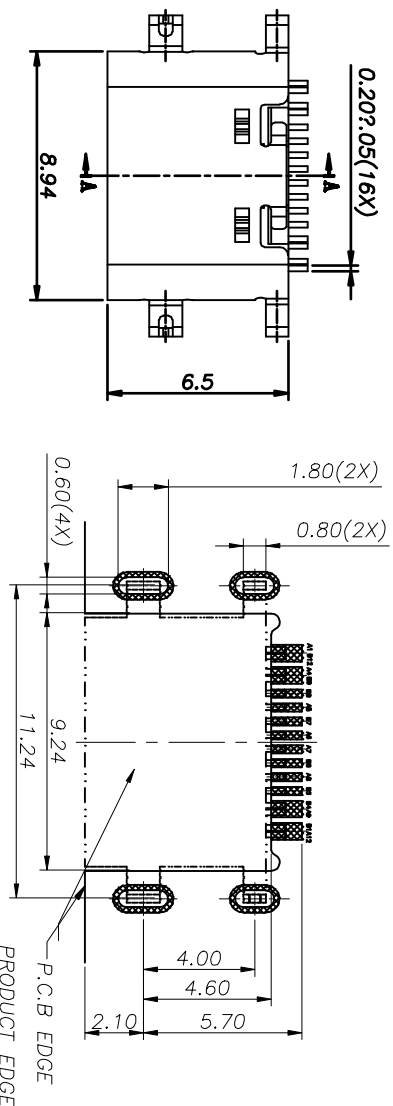


NOTE:

1.MATERIAL SPECIFICATION:
1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,U194 V-0.
2.CONTACTS:COPPER ALLOY
3.MID PLATE: STAINLESS STEEL
4.FRONT SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:
2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N

2-2.FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

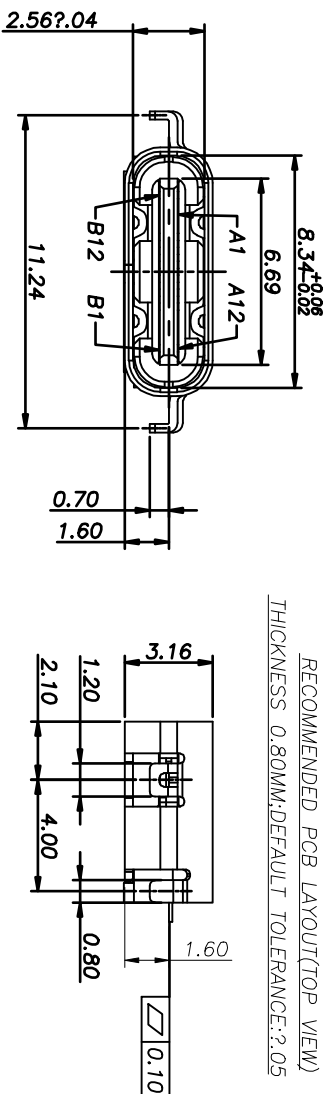

3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~1.5kgf.
3-2.REMOVAL FORCE: 0.8kgf~1.5kgf.
3-3.DURABILITY: 5000 CYCLES.


4.ELECTRICAL PERFORMANCE,
4-1. CURRENT RATING:3.0A
VOLTAGE RATING:5.0V

4-2. LCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LCR MAX. CHANGE OF ALL PINS: 10mΩ.


4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE:AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25℃~+85℃.

6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

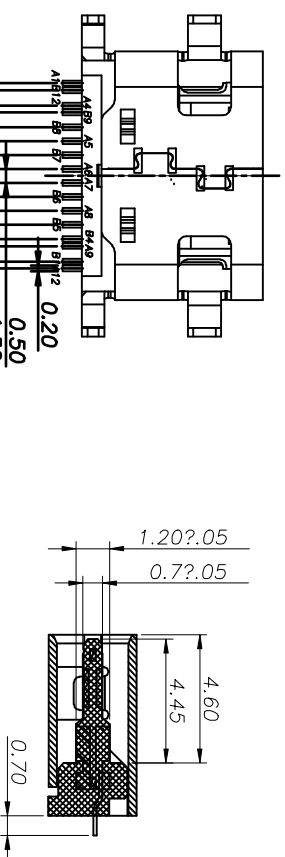

SECTION:A-A



TOLERANCES 一般公差	UNIT : mm
DISTANCE	

X.	±0.30
.X	±0.25
.XX	±0.15
.XXX	±0.10

ANGLE	±2°
X°	±1°
.XX°	±0.5°

DRAWN	TONY
CHECKED	JACK
APPROVE	DAVID

		DWG NO. :	
APPROVE		DAVID	
X ⁺ ±2 ⁺		SIZE A4	SCALE 1:1
X ⁻ ±1 ⁻		SHEET 1 of 1	REV. A
XX [±] ±0.5 [±]			

THIS PRODUCT SHOULD MEET HAZARDOUS MATERIAL CONTROL DIRECTIVE OF JUN SHENG JIE
FROM RAW MATERIAL TO MANUFACTURING, PACKAGE AND DELIVERY.