

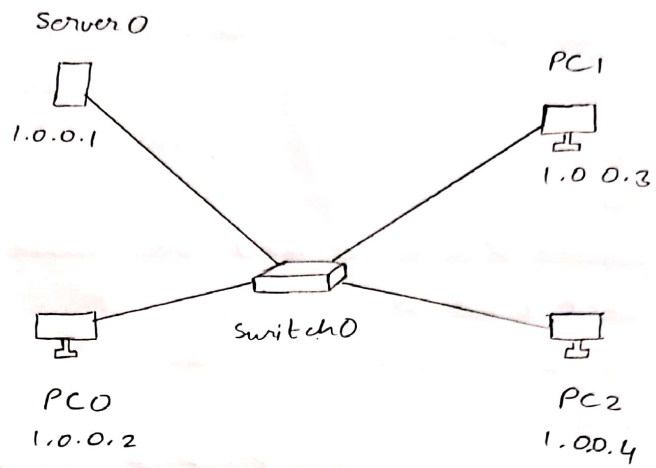
BASIC FIREWALL CONFIGURATION IN CISCO PACKET TRACER

AIM

To configure a network in cisco packet tracer with IP setting and firewall rules to block ping but allow web access.

PROCEDURE

1. Create network topology:
 - a) open cisco packet tracer and select PCs, server, switch as per the IP table.
 - b) Use auto cable to connect the devices.
2. Assign IP addresses:
 - a) Click PC / server → Desktop → IP configuration
 - b) Enter the given IPv4 address and subnet mask.
 - c) Repeat for all devices.
3. Configure firewall on server:
 - a) open server → desktop → Firewall (IPv4)
 - b) Turn on Firewall services
 - c) Deny ICMP: Remote IP 0.0.0.0, wild card 255.255.255.255
 - d) allow IP: Remote IP 0.0.0.0, wild card 255.255.255.255

TOPOLOGY

OUTPUT

Ping the server from a PC.

C:\>ping 1.0.0.1

Pinging 1.0.0.1 with 32 bytes of data:

Request timed out.

Request timed out.

Request timed out.

Request timed out.

Ping statistics for 1.0.0.1:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

4. Verify connection:

- a) On PC2, go to command prompt → ping
 < server IP >
- b) Result : No reply (ICMP blocked)

5. Test web access:

- a) on PC2 → web browser → Enter server IP
 in URL
- b) web access should be allowed.

Q. 11

RESULT

The network was successfully configured and the firewall blocked ICMP ping request while allowing web access to the server.