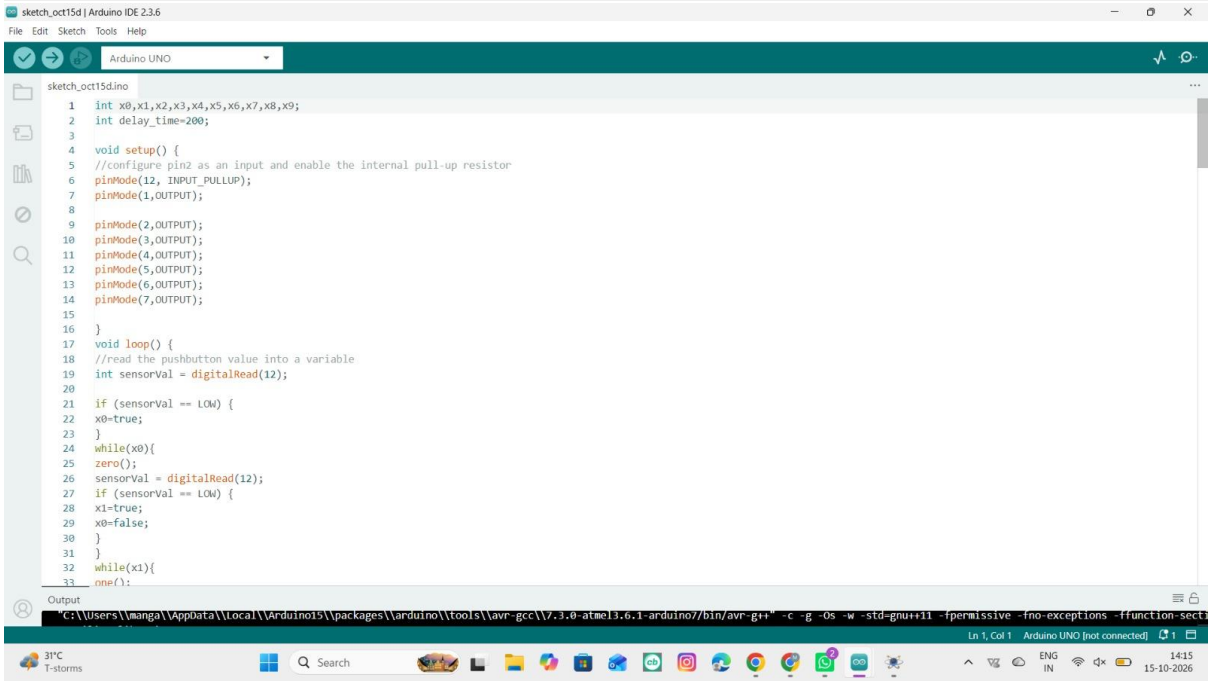
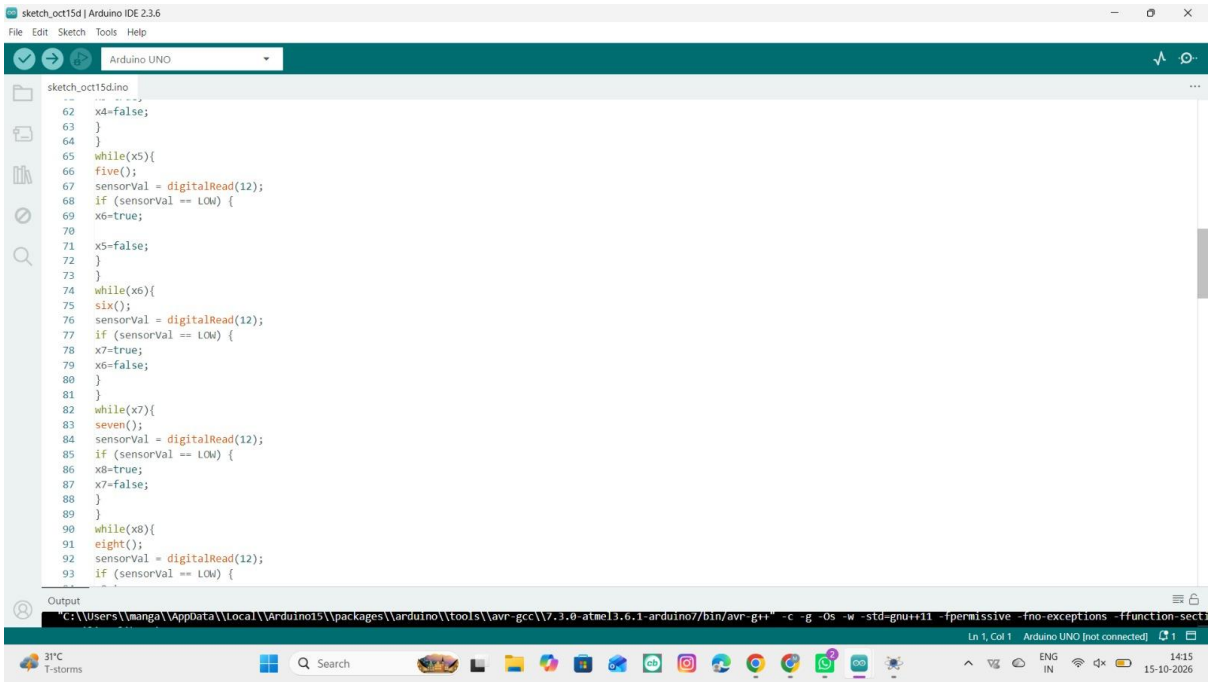
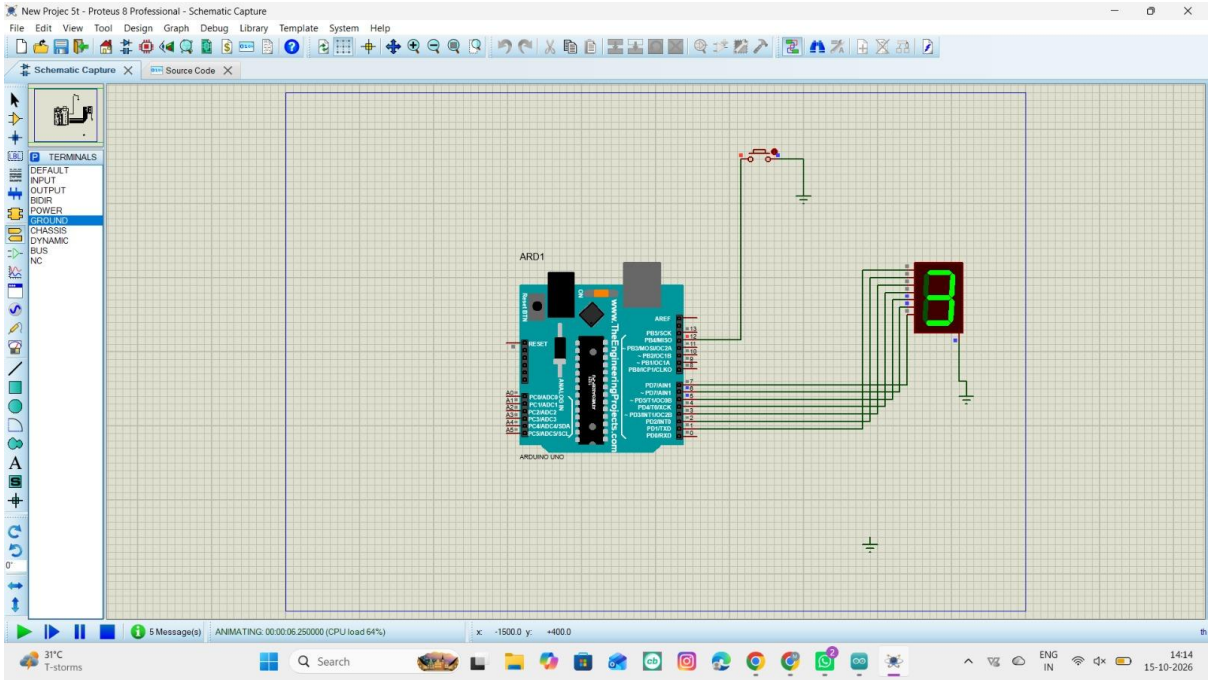

sketch_oct15d | Arduino IDE 2.3.6
File Edit Sketch Tools Help
Arduino UNO
sketch_oct15d.ino
if (sensorVal == LOW) {
x2=true;
x1=false;
}
}
while(x2){
two();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x3=true;
x2=false;
}
}
while(x3){
three();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x4=true;
x3=false;
}
}
while(x4){
four();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x5=true;
x4=false;
}
}
while(x5){
five();
Output
"C:\\Users\\manga\\AppData\\Local\\Arduino15\\packages\\arduino\\tools\\avr-gcc\\7.3.0-atmel3.6.1-arduino7/bin/avr-g++" -c -g -Os -w -std=gnu++11 -fpermissive -fno-exceptions -ffunction-sect
Ln 1, Col 1 Arduino UNO [not connected]
31°C T-storms
Search
ENG IN
14:15 15-10-2026


sketch_oct15d | Arduino IDE 2.3.6
File Edit Sketch Tools Help
Arduino UNO
sketch_oct15d.ino
int x0,x1,x2,x3,x4,x5,x6,x7,x8,x9;
int delay_time=200;
void setup() {
//configure pin2 as an input and enable the internal pull-up resistor
pinMode(12, INPUT_PULLUP);
pinMode(1,OUTPUT);
pinMode(2,OUTPUT);
pinMode(3,OUTPUT);
pinMode(4,OUTPUT);
pinMode(5,OUTPUT);
pinMode(6,OUTPUT);
pinMode(7,OUTPUT);
}
void loop() {
//read the pushbutton value into a variable
int sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x0=true;
}
while(x0){
zero();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x1=true;
x0=false;
}
}
while(x1){
Output
"C:\\Users\\manga\\AppData\\Local\\Arduino15\\packages\\arduino\\tools\\avr-gcc\\7.3.0-atmel3.6.1-arduino7/bin/avr-g++" -c -g -Os -w -std=gnu++11 -fpermissive -fno-exceptions -ffunction-sect
Ln 1, Col 1 Arduino UNO [not connected]
31°C T-storms
Search
ENG IN
14:15 15-10-2026


sketch_oct15d | Arduino IDE 2.3.6
File Edit Sketch Tools Help
Arduino UNO
sketch_oct15d.ino
x4=false;
}
}
while(x5){
five();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x6=true;
x5=false;
}
}
while(x6){
six();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x7=true;
x6=false;
}
}
while(x7){
seven();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
x8=true;
x7=false;
}
}
while(x8){
eight();
sensorVal = digitalRead(12);
if (sensorVal == LOW) {
Output
"C:\\Users\\manga\\AppData\\Local\\Arduino15\\packages\\arduino\\tools\\avr-gcc\\7.3.0-atmel3.6.1-arduino7/bin/avr-g++" -c -g -Os -w -std=gnu++11 -fpermissive -fno-exceptions -ffunction-sect
Ln 1, Col 1 Arduino UNO [not connected]
31°C T-storms
Search
ENG IN
14:15 15-10-2026


New Projec 5t - Proteus 8 Professional - Schematic Capture
File Edit View Tool Design Graph Debug Library Template System Help
Schematic Capture
Source Code
TERMINALS
DEFAULT
INPUT
OUTPUT
BIDIR
POWER
GROUND
CHASSIS
DYNAMIC
BUS
NC
ARD1
ARDUINO UNO
5 Message(s)
ANIMATING: 00:00:06.250000 (CPU load 64%)
31°C T-storms
Search
ENG IN
14:14 15-10-2026