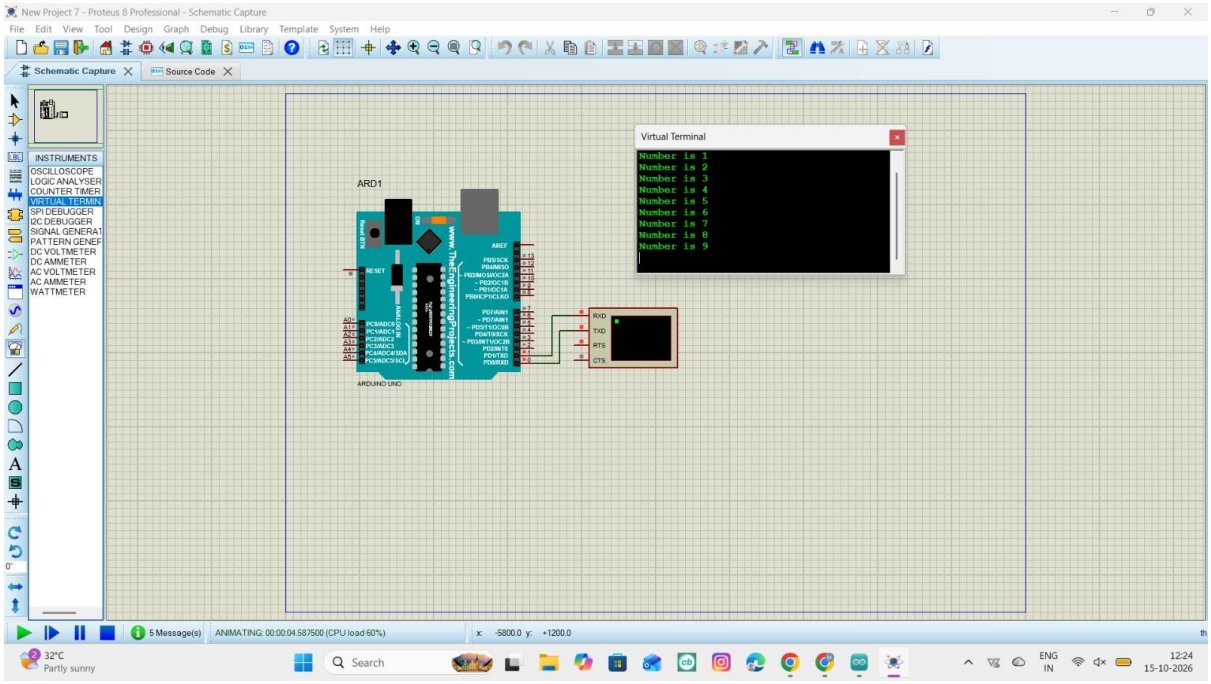
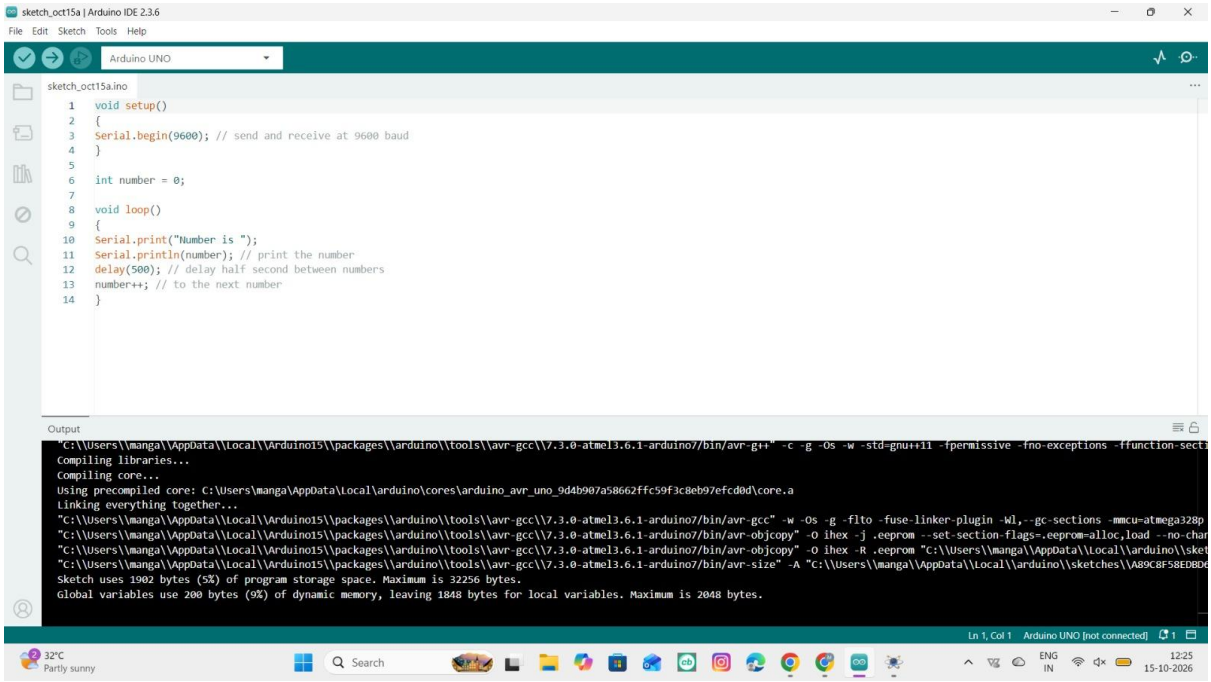

New Project 7 - Proteus 8 Professional - Schematic Capture
File Edit View Tool Design Graph Debug Library Template System Help
Schematic Capture
Source Code
INSTRUMENTS
OSCILLOSCOPE
LOGIC ANALYSER
COUNTER TIMER
VIRTUAL TERMIN
SPI DEBUGGER
I2C DEBUGGER
SIGNAL GENERAT
PATTERN GENER
DC VOLTMETER
DC AMMETER
AC VOLTMETER
AC AMMETER
WATTMETER
ARD1
ARDUINO UNO
Virtual Terminal
Number is 1
Number is 2
Number is 3
Number is 4
Number is 5
Number is 6
Number is 7
Number is 8
Number is 9
RXD
TXD
RTS
CTS
5 Message(s)
ANIMATING: 00:00:04.587500 (CPU load 60%)
32°C
Partly sunny
Search
ENG
IN
12:24
15-10-2026


sketch_oct15a | Arduino IDE 2.3.6
File Edit Sketch Tools Help
Arduino UNO
sketch_oct15a.ino
void setup()
{
Serial.begin(9600); // send and receive at 9600 baud
}
int number = 0;
void loop()
{
Serial.print("Number is ");
Serial.println(number); // print the number
delay(500); // delay half second between numbers
number++; // to the next number
}
Output
Compiling libraries...
Compiling core...
Using precompiled core: C:\Users\manga\AppData\Local\arduino\cores\arduino_avr_uno_9d4b907a58662ffc59f3c8eb97efcd0d\core.a
Linking everything together...
Sketch uses 1902 bytes (5%) of program storage space. Maximum is 32256 bytes.
Global variables use 200 bytes (9%) of dynamic memory, leaving 1848 bytes for local variables. Maximum is 2048 bytes.
Ln 1, Col 1 Arduino UNO [not connected]
32°C
Partly sunny
Search
ENG
IN
12:25
15-10-2026